



EMINENCE®

2018 PRODUCT CATALOG



LOOK INSIDE

If you take a look inside a professional audio enclosure or musical instrument amplifier it's likely you'll find a high-quality component made by Eminence. We've spent over 50 years collaborating with audio engineers from the world's most recognized brands, and we've gained a wealth of knowledge along the way. The result is a complete line of replacement and upgrade loudspeakers and high-frequency devices for virtually any OEM, DIY, or repair project. So take a look inside our catalog and see why countless audio enthusiasts and musicians in over 90 countries across the world choose Eminence.

2018 NEW PRODUCTS

PROFESSIONAL AUDIO

Loudspeaker Selection Guide	6
Professional Series	12
Neodymium Series	41
American Standard Series	50

HIGH FREQUENCY DEVICES

HF Drivers	81
Supertweeter Options	87
Horn Flares and Waveguides	88
Adapters and Hardware	89
Crossovers	90

GUITAR AND BASS SPEAKERS

WheelHouse	92
Signature Series	94
Legend Guitar	102
Patriot Series	112
Redcoat Series	127
Bass Guitar Speakers	139

REFERENCE

HF Driver and Horn Compatibility Chart	89
Loudspeaker Data Explained	152
Footnotes	155

CUTTING-EDGE SUPPORT

Our mission is to provide the best Quality, Value and Service to meet your needs.



7-YEAR WARRANTY*

Buy or sell Genuine Eminence products with complete confidence, knowing they come backed with the industry's leading warranty. Our products are designed and assembled in the USA by the most skilled and dedicated employees you will find anywhere.

*Warranty policy may vary outside of the continental United States and Canada. Check with your local distributor for warranty details.



BUYEMINENCE.COM

Order online – anytime! As a dealer you'll have 24/7 access to our entire product line at BuyEminence.com



WIDE PRODUCT SELECTION

From high-end pro audio applications, to replacement or upgrade guitar and bass speakers, Eminence has a hand-made product that will exceed your expectations.



CUSTOM SHOP SERVICE

Through the Eminence Custom Shop we can create alternate impedances of existing stock models, and can even revive an older discontinued model. We also offer a guitar speaker break-in service to loosen up the soft parts and get to tone nirvana faster. Send your inquiry to info@eminence.com to get started.




UNRIVALED CUSTOMER SERVICE

We take great pride in our commitment to quality, value and service, so if you have questions, we are ready to assist. From Tech Support, to Sales and Marketing, to even our Design Engineers, we will take the time to personally consult with you to ensure your needs are met.



WE'RE ON THE OMACRO AND QUIVERS NETWORKS*

With Quivers, consumers can make purchases directly from our Eminence.com website. As a dealer you'll be able to fulfill these orders and get the sale. We can also send users directly to our product listing on your website with the Omacro "Buy it Now" option. All you have to do is have the item in stock!



*Availability of the Quivers and Omacro networks may vary outside the United States.

CUTTING-EDGE TECHNOLOGY

Offering you the tools to build optimized enclosures.

EMINENCE DESIGNER

Eminence Designer is a state-of-the-art loudspeaker enclosure design program for PCs. It can calculate a box design that will bring out the best response from a loudspeaker in seconds - it can even suggest a box for your loudspeaker! Eminence Designer models closed, vented, bandpass and passive radiator boxes. It will print box drawings and graphs for a professional presentation. Eminence designer is quick to learn and easy to use.





ALPHA 2 AND ALPHA 5

Two new additions to the American Standard series offer unmistakable performance with an emphasis on value.


Alpha 2 / Page 51
Alpha 5 / Page 54



NEW TWEETER OPTIONS

Designed to deliver big performance in very limited spaces, the APT:30 supertweeter and SD28 soft dome tweeter can go where other devices simply can't.

Page 87

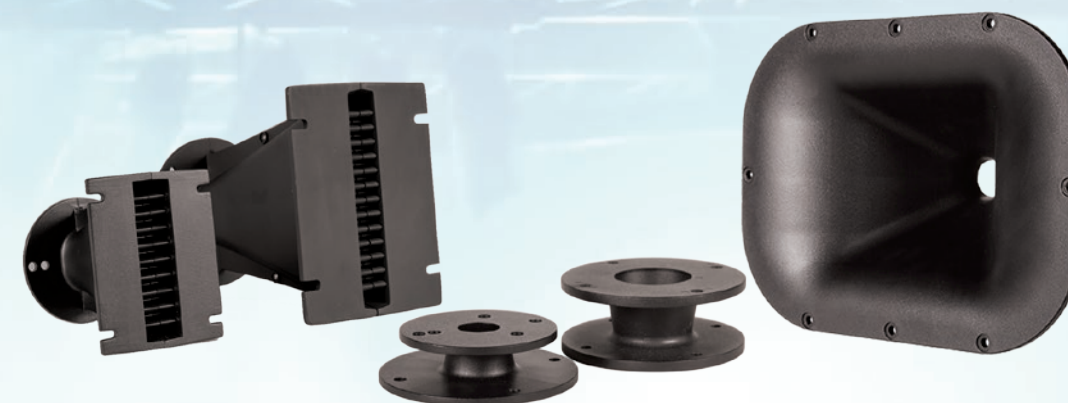

NEW WAVEGUIDES AND HORN ADAPTERS

Three new waveguides offer wide horizontal high-frequency coverage in tight fitting line array or conventional enclosure designs. Now you can mix and match your favorite bolt-on compression drivers and horns more easily with two new high-quality aluminum adapters from Eminence. The HA14-2 mates a 1.4" horn or driver with a 2" device, or choose the HA1-14 to pair a 1" horn or driver with a 1.4" device.


Waveguide Horns / Page 88
Horn Adapters / Page 89



F151M-8 RING RADIATOR

A ferrite version of the popular N151M-8 neodymium model, the F151M-8 also offers lower distortion, smoother frequency response, and increased sensitivity as compared to conventional ring radiator designs.

Page 83

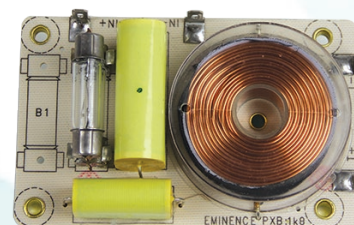

PXB:1K8 CROSSOVER

New to the Eminence PXB crossover family is the PXB:1K8. Featuring advanced circuit design to protect your system components, this 8 ohm high-pass filter's crossover frequency is 1.8 kHz. Pair it with the N151M-8 or F151M-8 ring radiator compression driver in your next project.

Page 90



CANNABIS REX 10

A highly requested 10" version of our popular Cannabis Rex, this hemp cone speaker offers warm, smooth, clean, and full tone, but with high-end definition – just like its big brother. Great to tame a bright amp and/or guitar.

Page 114



LEGEND EM12N

Rated at 200 watts, the neodymium EM12N delivers the same neutral tone as the ferrite version so you can hear more of your guitar and amp, but with even tighter, more responsive and dynamic characteristics.

Page 105



GUIT-FIDDLE

Finally, a 12" speaker voiced specifically for fiddle. Reduced bow friction noise and tame upper-mids. It's also great for guitar if you want thick tone with warm, smooth, more mellow mids and highs.

Page 125



WHEELHOUSE 200

A 15" version of our 12" Wheelhouse 150. Touch-sensitive and balanced, the WheelHouse delivers warm, smooth tone throughout the entire spectrum, allowing you to utilize your amp controls to shape your sound. It handles pedals and amp EQ with ease.

Page 93

2018 NEW PRODUCTS

LOUDSPEAKER SELECTION GUIDE

Use the selection guide on the next several pages to quickly identify the right driver for your application.
View each product's full data sheet on the page indicated next to its model name.

For **TECHNICAL ASSISTANCE** or to **BECOME A DEALER** call (502) 845-5622 or email info@eminence.com.
Answers to common questions can be found in the support section of our website at www.eminence.com.

Use the selection guide on the next several pages to quickly identify the right driver for your application. View each product's full data sheet on the page indicated next to its model name.													APPLICATION					BOX TYPE					
MODEL		PROGRAM POWER	VOICE COIL	Ω	SPL	FREQUENCY RANGE	FS	QT	VAS	XMAX													
													MIDRANGE	MIDBASS	WOOFER	SUBWOOFER	BASS GUITAR	SEALED	VENTED	SCOOP LOADING	HORN LOADING	MODEL	
2"	ALPHA 2	page 51	30 W	0.64"	8	83.8 dB	200 Hz – 20 kHz	185 Hz	0.72	0.18 liters	1.7 mm		Full range					✓	✓			ALPHA 2	page 51
3"	ALPHA 3	page 52	60 W	0.79"	8	88.6 dB	150 Hz – 20 kHz	118 Hz	0.5	0.95 liters	2.4 mm		Full range					✓	✓			ALPHA 3	page 52
4"	ALPHA 4	page 53	110 W	1"	8 or 4	88 dB	105 Hz – 10 kHz	120 Hz	0.63	1.76 liters	2.6 mm		✓	✓				✓	✓			ALPHA 4	page 53
5"	ALPHA 5	page 54	250 W	1.5"	8	89.4 dB	87 Hz – 3.5 kHz	87 Hz	0.54	6.14 liters	5.9 mm		✓	✓				✓	✓		✓	ALPHA 5	page 54
	PRO 5W-8	page 13	150 W	1"	8	91.1 dB	120 Hz – 7.5 kHz	95 Hz	0.32	4.31 liters	3 mm		✓	✓	✓		✓	✓				PRO 5W-8	page 13
6"	ALPHA-6A	page 55	200 W	1.5"	8 or 4	93.6 dB	95 Hz – 6 kHz	103 Hz	0.54	5.8 liters	3.5 mm		✓	✓				✓	✓		✓	ALPHA-6A	page 55
	ALPHA-6CBMRA	page 56	200 W	1.5"	8	97.8 dB	400 Hz – 5 kHz	407 Hz	1.35	0.45 liters	1.5 mm		✓								✓	ALPHA-6CBMRA	page 56
	NEO ALPHALITE 6A	page 42	200 W	1.5"	8	94 dB	100 Hz – 5.5 kHz	126 Hz	0.56	4.92 liters	3.5 mm		✓	✓				✓	✓		✓	ALPHALITE 6A	page 42
	LA6-CBMR	page 57	300 W	1.5"	8	97.8 dB	500 Hz – 5.4 kHz	460 Hz	0.89	0.4 liters	0.2 mm		✓								✓	LA6-CBMR	page 57
	BETA-6A	page 58	350 W	2"	8	94 dB	95 Hz – 4 kHz	123 Hz	0.56	3.51 liters	4.5 mm		✓	✓				✓	✓		✓	BETA-6A	page 58
8"	ALPHA-8A	page 59	250 W	1.5"	8	94 dB	58 Hz – 5 kHz	73 Hz	0.59	17.7 liters	3.2 mm		✓	✓	✓		✓	✓	✓			ALPHA-8A	page 59
	ALPHA-8MRA	page 60	250 W	1.5"	8	100.9 dB	400 Hz – 4.8 kHz	514 Hz	1.42	0.8 liters	1.6 mm		✓				✓				✓	ALPHA-8MRA	page 60
	DELTA PRO-8A	page 14	450 W	2"	8 or 16	97.8 dB	100 Hz – 3 kHz	69 Hz	0.22	18.32 liters	3 mm		✓	✓				✓	✓		✓	DELTA PRO-8A	page 14
	BETA-8A	page 61	450 W	2"	8	95.1 dB	78 Hz – 4.5 kHz	65 Hz	0.38	23.3 liters	3 mm		✓	✓	✓			✓	✓		✓	BETA-8A	page 61
	BETA-8CX	page 62	500 W	2"	8	92.9 dB	95 Hz – 3.3 kHz	62 Hz	0.29	21.43 liters	3.2 mm		✓	✓	✓			✓	✓			BETA-8CX	page 62
10"	ALPHA-10A	page 63	300 W	1.5"	8	95.6 dB	57 Hz – 4.5 kHz	50 Hz	0.59	82.2 liters	3.2 mm		✓	✓	✓		✓	✓	✓		✓	ALPHA-10A	page 63
	BASSLITE S2010	page 145	300 W	2"	8	96.2	54 Hz – 3 kHz	46 Hz	0.31	63.4 liters	4 mm			✓	✓		✓		✓			BASSLITE S2010	page 145
	BETA-10CBMRA	page 64	400 W	2"	8	99.6 dB	300 Hz – 4 kHz	326 Hz	1.73	1.7 liters	1.5 mm		✓								✓	BETA-10CBMRA	page 64
	LEGEND BP102	page 143	400 W	2"	8 or 4	91.8 dB	40 Hz – 2 kHz	35 Hz	0.43	91.2 liters	6.2 mm			✓	✓	✓	✓	✓	✓			LEGEND BP102	page 143
	BETA-10A	page 65	500 W	2"	8	97 dB	51 Hz – 3.8 kHz	53 Hz	0.49	60.1 liters	3 mm			✓	✓		✓	✓	✓		✓	BETA-10A	page 65
	BETA-10CX	page 66	500 W	2"	8	94.3 dB	60 Hz – 4 kHz	49 Hz	0.38	61.1 liters	5 mm		✓	✓	✓			✓	✓			BETA-10CX	page 66
	NEO DELTALITE II 2510	page 43	500 W	2.5"	8 or 4	97.3 dB	60 Hz – 4 kHz	53 Hz	0.42	52.5 liters	4.2 mm			✓	✓		✓	✓	✓		✓	DELTALITE II 2510	page 43
	DELTA-10A	page 67	700 W	2.5"	8 or 16	98.8 dB	63 Hz – 3.7 kHz	66 Hz	0.33	30.5 liters	3.5 mm		✓	✓	✓		✓		✓		✓	DELTA-10A	page 67
	KAPPA PRO-10A	page 15	1000 W	3"	8	97 dB	102 Hz – 2 kHz	46 Hz	0.2	52.2 liters	3.2 mm		✓	✓				✓	✓			KAPPA PRO-10A	page 15
KAPPA PRO-10LF	page 16	1200 W	3"	8	91.6 dB	47 Hz – 2 kHz	39 Hz	0.28	72.97 liters	7.2 mm				✓	✓	✓		✓		✓	KAPPA PRO-10LF	page 16	

12”

MODEL			PROGRAM POWER	VOICE COIL	Ω	SPL	FREQUENCY RANGE	FS	QT	VAS	XMAX		APPLICATION					BOX TYPE				MODEL	
													MIDRANGE	MIDBASS	WOOFER	SUBWOOFER	BASS GUITAR	SEALED	VENTED	SCOOP LOADING	HORN LOADING		
	ALPHA-12A	page 68	300 W	1.5”	8	95.6 dB	51 Hz – 4.3 kHz	49 Hz	0.77	121.5 liters	2.4 mm			✓	✓			✓	✓			ALPHA-12A	page 68
	BASSLITE S2012	page 148	300 W	2”	8	99 dB	49 Hz – 4.5 kHz	48 Hz	0.48	90.6 liters	5.2 mm			✓	✓		✓	✓				BASSLITE S2012	page 148
	BETA-12LTA	page 69	450 W	2”	8	97.7 dB	48 Hz – 8 kHz	45 Hz	0.51	136.3 liters	3.2 mm		✓	✓	✓			✓	✓			BETA-12LTA	page 69
	BETA-12A-2	page 70	500 W	2”	8	98 dB	43 Hz – 3.8 kHz	47 Hz	0.46	120.1 liters	4.4 mm		✓	✓	✓		✓	✓			✓	BETA-12A-2	page 70
	BETA-12CX	page 71	500 W	2”	8	97.3 dB	57 Hz – 4.6 kHz	47 Hz	0.48	120.94 liters	3.5 mm		✓	✓	✓			✓	✓			BETA-12CX	page 71
NEO	DELTALITE II 2512	page 44	500 W	2.5”	8	99.9 dB	58 Hz – 4.3 kHz	44 Hz	0.41	134.88 liters	4.9 mm			✓	✓		✓	✓			✓	DELTALITE II 2512	page 44
	LEGEND BP122	page 147	500 W	2”	8	94.1 dB	35 Hz – 2.3 kHz	35 Hz	0.54	157.4 liters	6.2 mm			✓	✓	✓	✓	✓	✓			LEGEND BP122	page 147
	DELTA PRO 12-450A	page 17	750 W	2.5”	8	99.8 dB	44 Hz – 4 kHz	44 Hz	0.37	141.66 liters	5.1 mm			✓	✓		✓		✓		✓	DELTA PRO 12-450A	page 17
	DELTA PRO 12-450-4	page 17	900 W	2.5”	4	97.4 dB	45 Hz – 3.8 kHz	45 Hz	0.39	137.73 liters	5.2 mm			✓	✓				✓		✓	DELTA PRO 12-450-4	page 17
	DELTA PRO-12A	page 18	800 W	2.5”	8	99.2 dB	52 Hz – 4.5 kHz	51 Hz	0.35	81.7 liters	4.6 mm		✓	✓	✓			✓	✓		✓	DELTA PRO-12A	page 18
	LAB12	page 19	800 W	2.5”	6	89.2 dB	25 Hz – 0.1 kHz	22 Hz	0.38	125.2 liters	13 mm					✓		✓	✓		✓	LAB12	page 19
	LAB12C	page 19	1000 W	2.5”	4	88.9 dB	25 Hz – 0.1 kHz	23 Hz	0.33	128.31 liters	13 mm					✓		✓	✓		✓	LAB12C	page 19
	DELTA-12A	page 72	800 W	2.5”	8 or 16	98.3 dB	54 Hz – 5 kHz	55 Hz	0.43	81.3 liters	2.4 mm		✓	✓	✓				✓			DELTA-12A	page 72
NEO	KAPPALITE 3012H0	page 45	800 W	3”	8	100.5 dB	51 Hz – 3.5 kHz	52 Hz	0.32	81.1 liters	6.2 mm		✓	✓	✓		✓	✓			✓	KAPPALITE 3012H0	page 45
	KAPPA-12A	page 74	900 W	3”	8	99.3 dB	62 Hz – 4.2 kHz	45 Hz	0.27	112.1 liters	3.2 mm		✓	✓	✓				✓		✓	KAPPA-12A	page 74
NEO	KAPPALITE 3012LF	page 46	900 W	3”	8	95.5 dB	46 Hz – 2 kHz	37 Hz	0.32	106.65 liters	9.1 mm				✓	✓	✓	✓	✓		✓	KAPPALITE 3012LF	page 46
	KAPPA PRO-12A	page 20	1000 W	3”	8	97.1 dB	57 Hz – 2.8 kHz	37 Hz	0.24	121 liters	4.8 mm			✓	✓				✓	✓		KAPPA PRO-12A	page 20
	DELTA-12LFA	page 73	1000 W	2.5”	8 or 4	94.6 dB	44 Hz – 3 kHz	51 Hz	0.47	67.9 liters	4.8 mm			✓	✓	✓	✓	✓	✓		✓	DELTA-12LFA	page 73
	DEFINIMAX 4012H0	page 21	1200 W	4”	8	96.2 dB	48 Hz – 2.7 kHz	51 Hz	0.35	53.68 liters	6.2 mm			✓	✓	✓	✓	✓	✓	✓	✓	DEFINIMAX 4012H0	page 21
	LA12850	page 22	1600 W	4”	8	95.9 dB	63 Hz – 2.1 kHz	46 Hz	0.32	66.07 liters	5 mm			✓	✓				✓		✓	LA12850	page 22
	DEFINIMAX 4012ULF	page 23	2400 W	4”	8	90.7 dB	37 Hz – 0.2 kHz	40 Hz	0.31	41.3 liters	6.7 mm					✓			✓		✓	DEFINIMAX 4012ULF	page 23

													APPLICATION					BOX TYPE					
													MIDRANGE	MIDBASS	WOOFER	SUBWOOFER	BASS GUITAR	SEALED	VENTED	SCOOP LOADING	HORN LOADING		
MODEL		PROGRAM POWER	VOICE COIL	Ω	SPL	FREQUENCY RANGE	FS	QT	VAS	XMAX											MODEL		
ALPHA-15A	page 75	400 W	1.5"	8	97 dB	46 Hz – 3.5 kHz	41 Hz	1.26	260 liters	3.8 mm		✓	✓	✓			✓	✓			ALPHA-15A	page 75	
BETA-15A	page 76	600 W	2"	8	98.2 dB	45 Hz – 3.7 kHz	35 Hz	0.58	334.6 liters	4 mm			✓	✓		✓	✓				BETA-15A	page 76	
DELTALITE II 2515	page 47	600 W	2.5"	8	99.2 dB	54 Hz – 3.7 kHz	42 Hz	0.38	204 liters	4.8 mm			✓	✓		✓	✓				DELTALITE II 2515	page 47	
LEGEND CA154	page 150	600 W	2.5"	4	96.9 dB	45 Hz – 3.0 kHz	51 Hz	0.49	108.2 liters	5 mm			✓	✓		✓	✓				LEGEND CA154	page 150	
LEGEND BP1525	page 149	700 W	2.5	8	96.6 dB	35 Hz – 2.1 kHz	32 Hz	0.48	397 liters	6.2 mm				✓	✓	✓	✓				LEGEND BP1525	page 149	
DELTA PRO-15A	page 24	800 W	2.5"	8	101.6 dB	54 Hz – 4.2 kHz	42 Hz	0.4	243.5 liters	4.3 mm		✓	✓	✓			✓	✓		✓	DELTA PRO-15A	page 24	
DELTA-15A	page 77	800 W	2.5"	8 or 16	100 dB	48 Hz – 4 kHz	40 Hz	0.53	270.7 liters	2.7 mm				✓	✓		✓	✓			DELTA-15A	page 77	
KAPPA-15A	page 79	900 W	3"	8 or 4	100.5 dB	52 Hz – 2.3 kHz	33 Hz	0.32	321.3 liters	4 mm				✓	✓			✓		✓	KAPPA-15A	page 79	
KAPPALITE 3015	page 48	900 W	3"	8	100.8 dB	40 Hz – 4 kHz	45 Hz	0.34	153 liters	5.9 mm				✓	✓			✓		✓	KAPPALITE 3015	page 48	
KAPPALITE 3015LF	page 49	900 W	3"	8	98.4 dB	40 Hz – 1.5 kHz	44 Hz	0.46	150.9 liters	9.6 mm					✓	✓		✓		✓	KAPPALITE 3015LF	page 49	
KAPPA PRO-15A	page 25	1000 W	3"	8	101 dB	46 Hz – 4 kHz	47 Hz	0.38	167.7 liters	3.2 mm				✓	✓		✓		✓		KAPPA PRO-15A	page 25	
DELTA-15LFA	page 78	1000 W	2.5"	8	96 dB	42 Hz – 3.2 kHz	39 Hz	0.48	241 liters	4.8 mm				✓	✓	✓	✓	✓			DELTA-15LFA	page 78	
DELTA-15LF-4	page 78	1200 W	2.5"	4	95 dB	40 Hz – 2.2 kHz	40 Hz	0.49	253.93 liters	4.8 mm				✓	✓	✓	✓	✓			DELTA-15LF-4	page 78	
KAPPA PRO-15LF-2	page 26	1200 W	3"	8 or 4	97.8 dB	38 Hz – 1.8 kHz	35 Hz	0.3	198.8 liters	6.7 mm					✓	✓		✓	✓	✓	KAPPA PRO-15LF-2	page 26	
LAB15	page 27	1200 W	3"	6	88.5 dB	20 Hz – 0.1 kHz	28 Hz	0.35	103.61 liters	11.8 mm						✓	✓			✓	LAB15	page 27	
KAPPA-15LFA	page 80	1200 W	3"	8	99 dB	38 Hz – 2.7 kHz	39 Hz	0.38	159 liters	5.5 mm				✓	✓	✓		✓		✓	KAPPA-15LFA	page 80	
LA15850	page 28	1600 W	4"	8	96.2 dB	45 Hz – 1.5 kHz	34 Hz	0.33	234.15 liters	4.1 mm				✓	✓	✓		✓	✓	✓	LA15850	page 28	
OMEGA PRO-15A	page 29	1600 W	4"	8	97.3 dB	51 Hz – 1.7 kHz	33 Hz	0.32	258.5 liters	4.8 mm					✓	✓		✓	✓	✓	OMEGA PRO-15A	page 29	
DEFINIMAX 4015LF	page 30	2400 W	4"	8	94.7 dB	39 Hz – 1.2 kHz	40 Hz	0.52	111.97 liters	9 mm					✓	✓		✓	✓	✓	DEFINIMAX 4015LF	page 30	
DEFINIMAX 4015ULF	page 31	2400 W	4"	8	93 dB	35 Hz – 0.2 kHz	38 Hz	0.34	101.79 liters	7.3 mm						✓			✓	✓	DEFINIMAX 4015ULF	page 31	
KILOMAX PRO 15A	page 32	2500 W	4"	8	95.5 dB	44 Hz – 0.8 kHz	41 Hz	0.39	154.5 liters	7.9 mm					✓	✓			✓	✓	KILOMAX PRO 15A	page 32	
DELTA PRO-18A	page 33	1000 W	2.5"	8 or 4	96 dB	37 Hz – 0.2 kHz	28 Hz	0.32	493.2 liters	6.7 mm						✓			✓	✓	DELTA PRO-18A	page 33	
SIGMA PRO 18A-2	page 34	1300 W	3"	8 or 4	99 dB	41 Hz – 2.4 kHz	28 Hz	0.29	441.2 liters	6.1 mm					✓	✓					SIGMA PRO 18A-2	page 34	
KAPPA PRO 18LF	page 36	1600 W	3"	8	98 dB	38 Hz – 0.7 kHz	32 Hz	0.33	391.61 liters	8 mm					✓	✓	✓			✓	KAPPA PRO 18LF	page 36	
OMEGA PRO-18A	page 37	1600 W	4"	8 or 4	97 dB	40 Hz – 0.8 kHz	25 Hz	0.31	548.7 liters	4.8 mm					✓	✓			✓	✓	OMEGA PRO-18A	page 37	
DEFINIMAX 4018LF	page 38	2400 W	4"	8	94.9 dB	31 Hz – 0.2 kHz	30 Hz	0.34	254.71 liters	8.57 mm						✓			✓	✓	DEFINIMAX 4018LF	page 38	
IMPERO 18A	page 39	2400 W	4"	8 or 4	95.9 dB	39 Hz – 0.8 kHz	33 Hz	0.43	317.02 liters	8 mm						✓	✓		✓	✓	IMPERO 18A	page 39	
KILOMAX PRO 18A	page 40	2500 W	4"	8	95.8 dB	33 Hz – 0.3 kHz	32 Hz	0.47	331.5 liters	10 mm							✓	✓			KILOMAX PRO 18A	page 40	

Live or in the studio, the Eminence Professional Series takes performance to a new level.

Arena arrays, on stage PAs, or late-night recording sessions – there’s an Eminence speaker that’ll make your hard work pay off in tonal perfection.

From dialing a sound in, to rocking it out, for years Eminence Professional Series loudspeakers have been the leading choice in audio applications worldwide.

We speak the language of audio engineers. And for us, the first word is aluminum. At the heart of our Professional Series is a cast aluminum Eminence chassis – lightweight and strong. It holds the magnetic field within the gap and keeps power compression lower by wicking away heat from the voice coil. Motor strength is greater while

keeping the stray magnetic field lower. The chassis and all metal parts are coated with an epoxy-acrylic finish. It’s done in-house so we control the e-coat process, letting us create a coating within 0.001” – the diameter of a human hair - of our specifications. This is critical for close tolerance transducer motor designs. Front or rear sealing gaskets allow for front or rear loading. Attention to detail. It’s what makes the difference between average sound or stunning performance.

Our experience goes beyond how to make great speakers. We also know what kind of speakers you need. Heavy-duty subwoofers, low distortion woofers, and super high power woofers. Or lightweight neodymium transducers in truncated frames for line arrays. Each designed to work best where you need it most.



Attention to detail. It’s what makes the difference between average sound or stunning performance.



*Warranty policy may vary outside of the continental United States and Canada. Check with your local distributor for warranty details.

PROFESSIONAL SERIES

PRO 5W-8

Small in size, large in performance. Featuring an advanced X5™ pulp cone, high temperature copper wire voice coil, and truncated cast frame chassis, the Pro 5W can handle your most demanding midbass, midrange, line array, or column array applications.

- 150 W Program Power
- 5” Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input checked="" type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input type="checkbox"/>
Bass Guitar	<input checked="" type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	5", 127 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	150 W
Nominal Power	75 W
Resonance	95 Hz
Usable Frequency Range	120 Hz – 7.5 kHz
Sensitivity*	91.1 dB
Magnet Weight	15 oz.
Gap Height	0.315", 8 mm
Voice Coil Diameter	1", 25 mm

MATERIALS OF CONSTRUCTION

Copper voice coil	
Kapton former	
Ferrite magnet	
Vented and extended core	
Die-cast aluminum basket	
X5™ Pulp cone	
Cloth cone edge	
Treated paper dust cap	



ISO-5
The ISO-5 isolation box provides a quick and cost-effective solution for chambering a 5" open-frame speaker. Page 89. (sold separately)


THIELE & SMALL PARAMETERS

Fs	95 Hz
Re	5.43 Ω
Le	0.28 mH
Qms	3.35
Qes	0.35

MOUNTING INFORMATION

Recommended Enclosure Volume	
Sealed	1.98–3.11 liters, 0.07–0.11 cu.ft.
Vented	2.55–4.81 liters, 0.09–0.17 cu.ft.
Driver Volume Displaced	0.013 cu.ft., 0.36 liters
Overall Diameter	5.25", 133.4 mm
Baffle Hole Diameter	4.74", 120.4 mm
Front Sealing Gasket	4.28", 108.7 mm
Rear Sealing Gasket	Yes
Mounting Holes Diameter	Yes
Mounting Holes B.C.D.	0.13", 3.2 mm
Depth	4.79", 121.7 mm
Net Weight	2.5", 63.5 mm
Shipping Weight	2.9 lbs, 1.32 kg
	3.3 lbs, 1.5 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

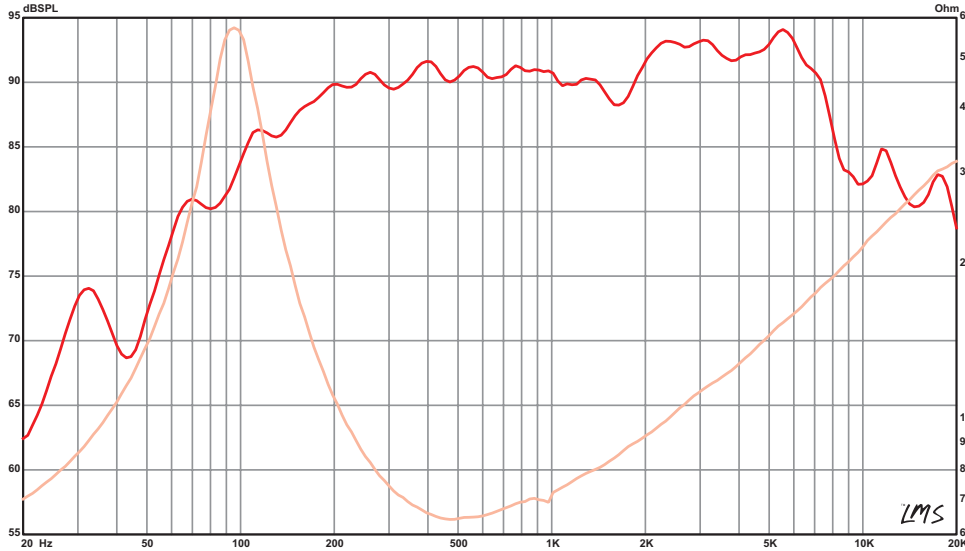

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

PROFESSIONAL SERIES

DELTA PRO-8A

High power, high sensitivity midbass and midrange driver for pro audio or MI. Truncated cast aluminum heat sink style basket is great for stacking in a line array.

- 450 W Program Power
- 8" Nominal Diameter
- 8 or 16 Ω

APPLICATION		ENCLOSURE	
Midrange	<input checked="" type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	8", 203 mm
Nominal Impedance*	8 or 16 Ω
Power Rating*	
Program Power	450 W
Nominal Power	225 W
Resonance	69 Hz
Usable Frequency Range	100 Hz – 3 kHz
Sensitivity*	97.8 dB
Magnet Weight	59 oz.
Gap Height	0.31", 7.9 mm
Voice Coil Diameter	2", 51 mm

MATERIALS OF CONSTRUCTION

Copper voice coil
Polyimide former
Ferrite magnet
Vented and extended core
Die-cast aluminum basket
Paper cone
Cloth cone edge
Solid composition paper dust cap




THIELE & SMALL PARAMETERS

Fs	69 Hz
Re	5.4 Ω
Le	0.82 mH
Qms	6.43
Qes	0.22

MOUNTING INFORMATION

Recommended Enclosure Volume	8–16 liters,
Sealed	0.3–0.6 cu.ft.
Vented	10–16 liters,
	0.4–0.6 cu.ft.
Qts	0.22
Driver Volume Displaced	0.037 cu.ft., 1.04 liters
Overall Diameter	9.36", 237.7 mm
Baffle Hole Diameter	8.02", 203.7 mm
Front Sealing Gasket	7.36", 186.9 mm
Rear Sealing Gasket	Yes
Mounting Holes Diameter	Yes
Mounting Holes B.C.D.	0.28", 7.1 mm
Depth	8.6", 218.4 mm
Net Weight	3.75", 95.3 mm
Shipping Weight	10 lbs , 4.54 kg
	11 lbs , 4.99 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

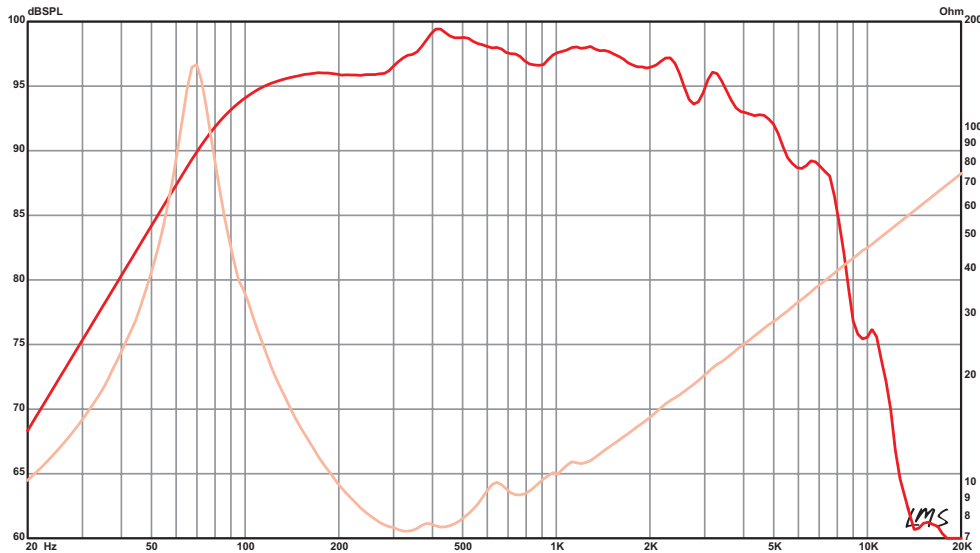

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

PROFESSIONAL SERIES

KAPPA PRO-10A

Recommended for pro audio in a sealed midrange, vented midbass, or horn loaded midrange enclosure.

- 1000 W Program Power
- 10" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input checked="" type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	10", 254 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	1000 W
Nominal Power	500 W
Resonance	46 Hz
Usable Frequency Range	102 Hz – 2 kHz
Sensitivity*	97 dB
Magnet Weight	80 oz.
Gap Height	0.375", 9.5 mm
Voice Coil Diameter	3", 76 mm

MATERIALS OF CONSTRUCTION

Copper voice coil
Polyimide former
Ferrite magnet
Vented core
Die-cast aluminum basket
Paper cone
Cloth cone edge
Solid composition paper dust cap




THIELE & SMALL PARAMETERS

Fs	46 Hz
Re	6.5 Ω
Le	1.15 mH
Qms	10.1
Qes	0.2

MOUNTING INFORMATION

Recommended Enclosure Volume	7–9.9 liters,
Sealed	0.25–0.35 cu.ft.
Vented	12–28 liters,
	0.43–1 cu.ft.
Qts	0.2
Driver Volume Displaced	0.061 cu.ft., 1.72 liters
Overall Diameter	10.25", 260.4 mm
Baffle Hole Diameter	9.13", 231.9 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.27", 6.9 mm
Mounting Holes B.C.D.	9.75", 247.7 mm
Depth	4.33", 110 mm
Net Weight	15.3 lbs , 6.94 kg
Shipping Weight	16.4 lbs , 7.44 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

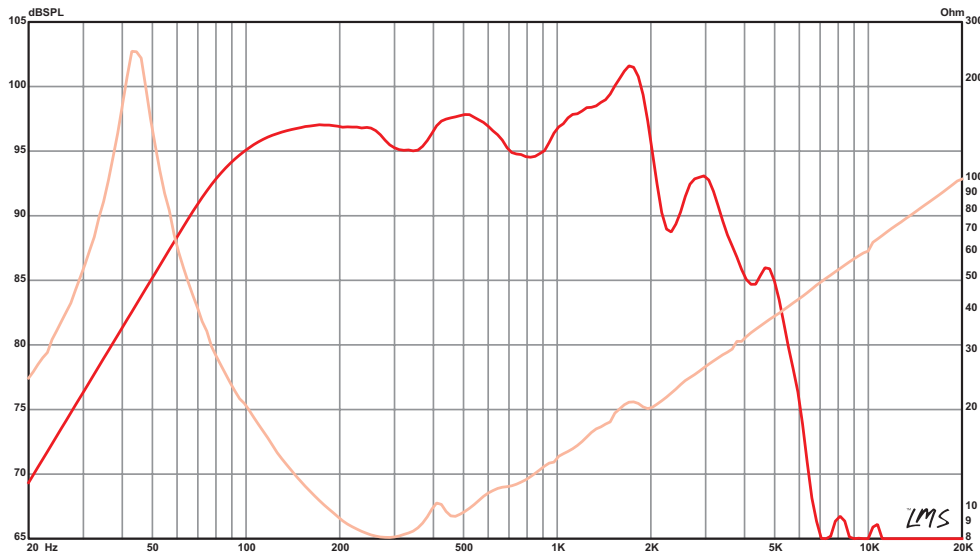

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

PROFESSIONAL SERIES

KAPPA PRO-10LF

A high power, low frequency enhanced version of the Kappa Pro 10. Excels in very compact vented or horn loaded bass guitar or subwoofer enclosures.

- 1200 W Program Power
- 10" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input type="checkbox"/>
Midbass	<input type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input checked="" type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input checked="" type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	10", 254 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	1200 W
Nominal Power	600 W
Resonance	39 Hz
Usable Frequency Range	47 Hz – 2 kHz
Sensitivity*	91.6 dB
Magnet Weight	105 oz.
Gap Height	0.375", 9.5 mm
Voice Coil Diameter	3", 76 mm

MATERIALS OF CONSTRUCTION

- Aluminum voice coil
- Polyimide former
- Ferrite magnet
- Vented and extended core
- Die-cast aluminum basket
- Treated paper cone
- Paper cone edge
- Treated Paper dust cap




THIELE & SMALL PARAMETERS

Fs	39 Hz
Re	5.47 Ω
Le	0.97 mH
Qms	8.97
Qes	0.29

MOUNTING INFORMATION

Recommended Enclosure Volume	N/A
Sealed	
Vented	25.49–49.55 liters, 0.9–1.75 cu.ft.
Qts	0.28
Driver Volume Displaced	0.067 cu.ft., 1.9 liters
Vas	2.58 cu.ft., 72.97 liters
Overall Diameter	10.27", 260.9 mm
Vd	271.4 cc
Baffle Hole Diameter	9.14", 232.2 mm
Cms	0.37 mm/N
Front Sealing Gasket	Yes
BL	14.46 T-M
Rear Sealing Gasket	Yes
Mms	46 grams
Mounting Holes Diameter	0.28", 7.1 mm
EBP	132
Mounting Holes B.C.D.	9.75", 247.7 mm
Xmax	7.2 mm
Depth	5", 127 mm
Sd	376.9 cm2
Net Weight	17.2 lbs , 7.8 kg
Xlim	16 mm
Shipping Weight	18.35 lbs , 8.32 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

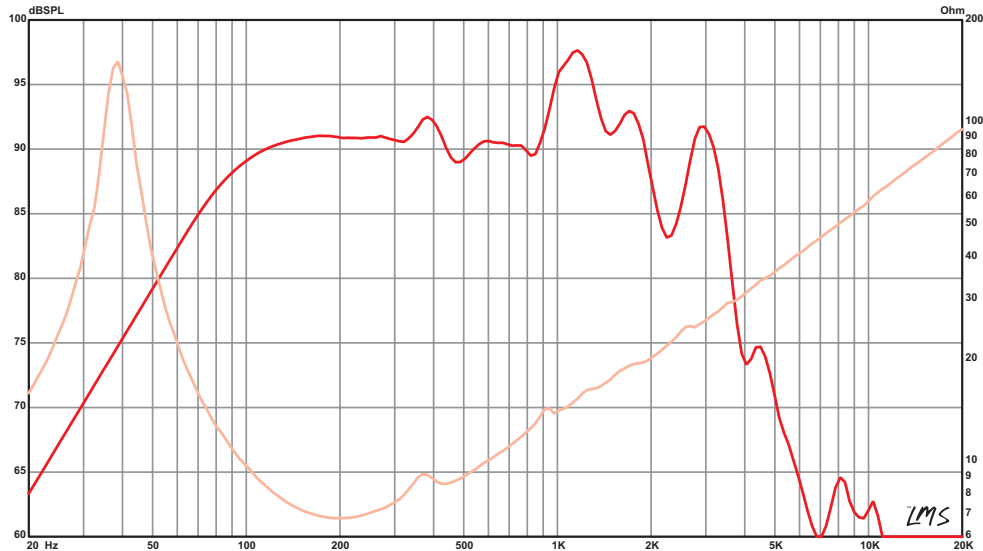

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

PROFESSIONAL SERIES

DELTA PRO 12-450

The Delta Pro 12-450 is a lighter weight version of the Delta Pro 12. Recommended as a woofer or midbass in vented enclosures. Also makes a perfect replacement in many portable PA cabinets.

- 750 W Program Power
- 12" Nominal Diameter
- 8 or 4 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input checked="" type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	12", 305 mm
Nominal Impedance*	8 or 4 Ω
Power Rating*	
Program Power	750 W
Nominal Power	375 W
Resonance	44 Hz
Usable Frequency Range	44 Hz – 4 kHz
Sensitivity*	99.8 dB
Magnet Weight	56 oz.
Gap Height	0.313", 7.9 mm
Voice Coil Diameter	2.5", 64 mm

MATERIALS OF CONSTRUCTION

- Aluminum voice coil
- Polyimide former
- Ferrite magnet
- Vented and extended core
- Die-cast aluminum basket
- Paper cone
- Cloth cone edge
- Paper dust cap




THIELE & SMALL PARAMETERS

Fs	44 Hz
Re	5.04 Ω
Le	0.54 mH
Qms	7.59
Qes	0.39

MOUNTING INFORMATION

Recommended Enclosure Volume	N/A
Sealed	
Vented	36.81–93.45 liters, 1.3–3.5 cu.ft.
Qts	0.37
Driver Volume Displaced	0.079 cu.ft., 2.25 liters
Vas	5 cu.ft., 141.66 liters
Overall Diameter	12.38", 314.5 mm
Vd	271.5 cc
Baffle Hole Diameter	11.07", 281.2 mm
Cms	0.36 mm/N
Front Sealing Gasket	Yes
BL	11.47 T-M
Rear Sealing Gasket	Yes
Mms	36 grams
Mounting Holes Diameter	0.27", 6.9 mm
EBP	115
Mounting Holes B.C.D.	11.57", 293.9 mm
Xmax	5.1 mm
Depth	5.5", 139.7 mm
Sd	532.4 cm2
Net Weight	11.7 lbs , 5.31 kg
Xlim	13.7 mm
Shipping Weight	14 lbs , 6.35 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

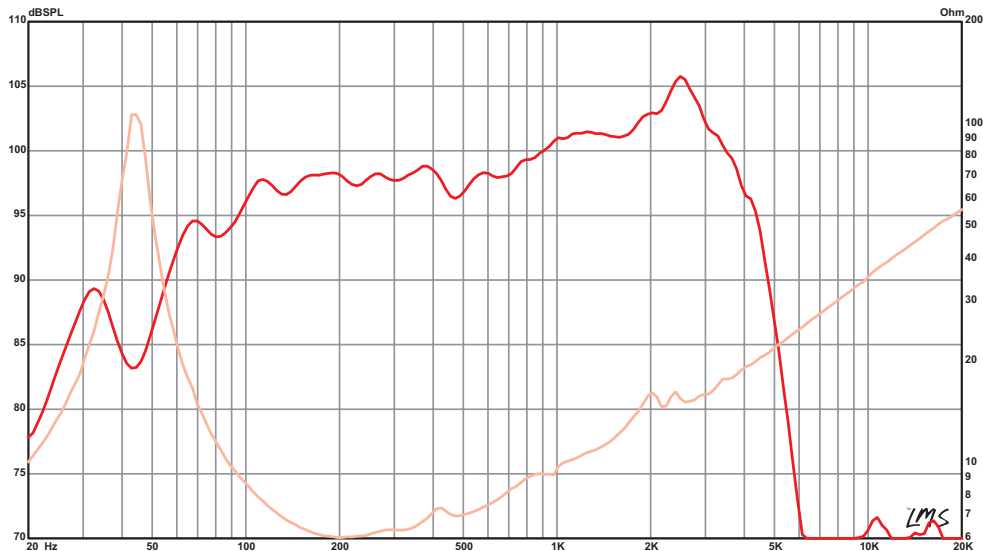

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

PROFESSIONAL SERIES

DELTA PRO-12A

Recommended for professional audio in both sealed and vented enclosures. Ideal for full-range, mid/hi, and monitor wedges. Super clean and highly sensitive, it's also a popular choice for guitar.

- 800 W Program Power
- 12" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input checked="" type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	12", 305 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	800 W
Nominal Power	400 W
Resonance	51 Hz
Usable Frequency Range	52 Hz – 4.5 kHz
Sensitivity*	99.2 dB
Magnet Weight	80 oz.
Gap Height	0.375", 9.5 mm
Voice Coil Diameter	2.5", 64 mm

MATERIALS OF CONSTRUCTION

- Aluminum voice coil
- Polyimide former
- Ferrite magnet
- Vented and extended core
- Die-cast aluminum basket
- Paper cone
- Cloth cone edge
- Solid composition paper dust cap




THIELE & SMALL PARAMETERS

Fs	51 Hz
Re	5.71 Ω
Le	0.84 mH
Qms	7.56
Qes	0.37

MOUNTING INFORMATION

Recommended Enclosure Volume	28–35 liters,
Sealed	1–1.25 cu.ft.
Vented	31–91 liters,
	1.1–3.2 cu.ft.
Qts	0.35
Driver Volume Displaced	0.09 cu.ft., 2.55 liters
Vas	2.89 cu.ft., 81.7 liters
Overall Diameter	12.38", 314.5 mm
Vd	242 cc
Baffle Hole Diameter	11.07", 281.2 mm
Cms	0.21 mm/N
Front Sealing Gasket	Yes
BL	15.3 T-M
Rear Sealing Gasket	Yes
Mms	48 grams
Mounting Holes Diameter	0.27", 6.9 mm
EBP	138
Mounting Holes B.C.D.	11.69", 296.9 mm
Xmax	4.6 mm
Depth	6.22", 158 mm
Sd	532.4 cm2
Net Weight	16.3 lbs , 7.39 kg
Xlim	13.7 mm
Shipping Weight	18 lbs , 8.16 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

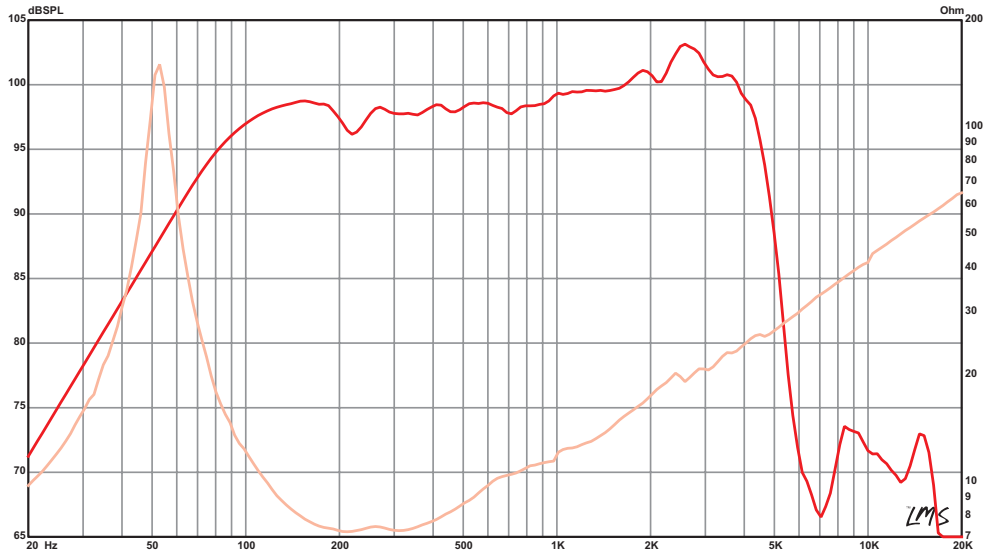

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

PROFESSIONAL SERIES

LAB12

Recommended for vented, sealed, and horn loaded professional audio enclosures as a subwoofer. A popular choice for car audio subs.

- 800 W Program Power
- 12" Nominal Diameter
- 6 or 4 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input checked="" type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	12", 305 mm
Nominal Impedance*	6 or 4 Ω
Power Rating*	
Program Power	800 W
Nominal Power	400 W
Resonance	22 Hz
Usable Frequency Range	25 Hz – 0.1 kHz
Sensitivity*	89.2 dB
Magnet Weight	160 oz.
Gap Height	0.375", 9.5 mm
Voice Coil Diameter	2.5", 64 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Polyimide former
- Double stacked 80 oz. ferrite magnets
- Vented and extended core
- 12-spoke die-cast aluminum basket
- Kevlar-reinforced paper cone
- Foam cone edge
- Dual inverted dust caps




THIELE & SMALL PARAMETERS

Fs	22 Hz
Re	4.29 Ω
Le	1.48 mH
Qms	13.32
Qes	0.39

MOUNTING INFORMATION

Recommended Enclosure Volume	22.7–28.3 liters,
Sealed	0.8–1 cu.ft.
Vented	45.3–101.9 liters,
	1.6–3.6 cu.ft.
Qts	0.38
Driver Volume Displaced	0.109 cu.ft., 3.09 liters
Vas	4.42 cu.ft., 125.2 liters
Overall Diameter	12.32", 312.9 mm
Vd	659 cc
Baffle Hole Diameter	11.04", 280.4 mm
Cms	0.35 mm/N
Front Sealing Gasket	Yes
BL	15 T-M
Rear Sealing Gasket	N/A
Mms	146 grams
Mounting Holes Diameter	0.26", 6.6 mm
EBP	56
Mounting Holes B.C.D.	11.77", 299 mm
Xmax	13 mm
Depth	6.44", 163.6 mm
Sd	506.7 cm2
Net Weight	22 lbs , 9.98 kg
Xlim	22 mm
Shipping Weight	23.8 lbs , 10.8 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

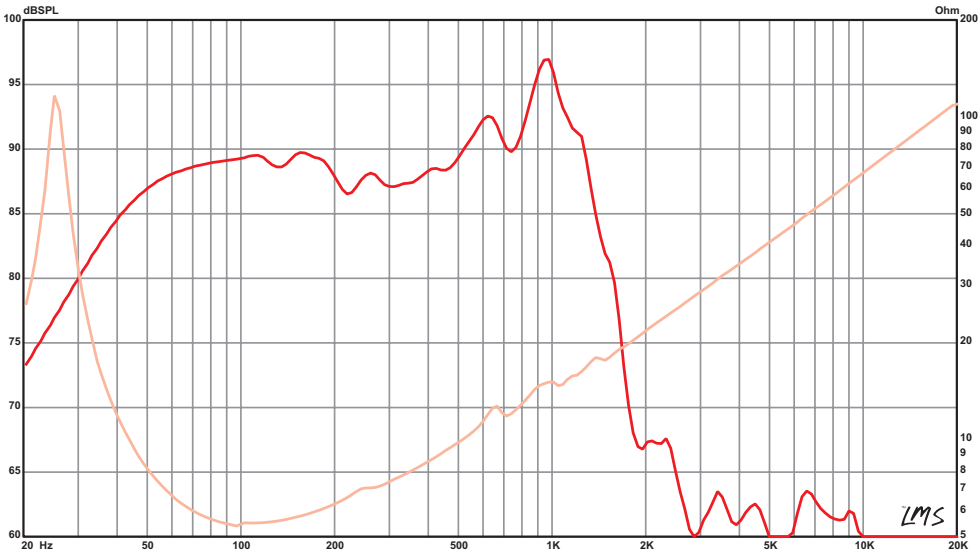

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

PROFESSIONAL SERIES

KAPPA PRO-12A

High efficiency pro audio driver for vented midbass, and vented bass enclosures.

- 1000 W Program Power
- 12" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input checked="" type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	12", 305 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	1000 W
Nominal Power	500 W
Resonance	37 Hz
Usable Frequency Range	57 Hz – 2.8 kHz
Sensitivity*	97.1 dB
Magnet Weight	80 oz.
Gap Height	0.375", 9.5 mm
Voice Coil Diameter	3", 76 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Polyimide former
- Ferrite magnet
- Vented core
- Die-cast aluminum basket
- Paper cone
- Cloth cone edge
- Solid composition paper dust cap




THIELE & SMALL PARAMETERS

Fs	37 Hz
Re	5.46 Ω
Le	1.22 mH
Qms	6.93
Qes	0.25

MOUNTING INFORMATION

Recommended Enclosure Volume	N/A
Sealed	
Vented	17–34 liters, 0.6–1.2 cu.ft.
Qts	0.24
Driver Volume Displaced	0.09 cu.ft., 2.55 liters
Vas	4.27 cu.ft., 121 liters
Overall Diameter	12.38", 314.5 mm
Vd	249 cc
Baffle Hole Diameter	11.07", 281.2 mm
Cms	0.32 mm/N
Front Sealing Gasket	Yes
BL	17.3 T-M
Rear Sealing Gasket	Yes
Mms	59 grams
Mounting Holes Diameter	0.27", 6.9 mm
EBP	148
Mounting Holes B.C.D.	11.69", 296.9 mm
Xmax	4.8 mm
Depth	6.22", 158 mm
Sd	519.5 cm2
Net Weight	16.6 lbs , 7.53 kg
Xlim	14.8 mm
Shipping Weight	18.4 lbs , 8.35 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

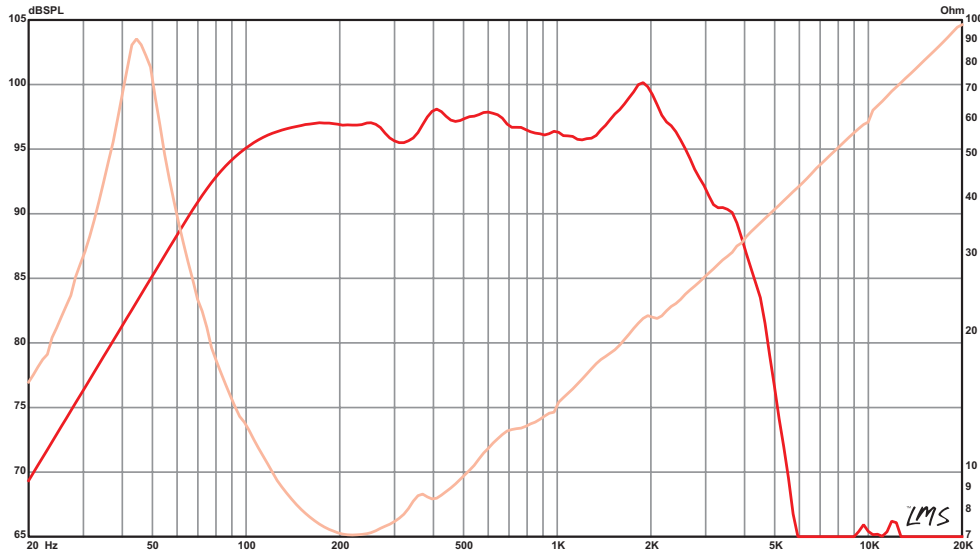

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

PROFESSIONAL SERIES

DEFINIMAX™ 4012H0

High output, low distortion midbass or woofer with a broad frequency response. Recommended for pro audio in both sealed and vented enclosures.

- 1200 W Program Power
- 12" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input checked="" type="checkbox"/>
Subwoofer	<input checked="" type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input checked="" type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	12", 305 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	1200 W
Nominal Power	600 W
Resonance	51 Hz
Usable Frequency Range	48 Hz – 2.7 kHz
Sensitivity*	96.2 dB
Magnet Weight	109 oz.
Gap Height	0.375", 9.5 mm
Voice Coil Diameter	4", 102 mm

MATERIALS OF CONSTRUCTION

- Edge wound copper voice coil
- Kapton former
- Ferrite magnet
- Undercut with aluminum shorting ring and Core Periphery Ventilation
- Die-cast aluminum basket
- Water resistant paper cone
- Cloth cone edge
- Water resistant treated paper dust cap




THIELE & SMALL PARAMETERS

Fs	51 Hz
Re	5.52 Ω
Le	0.95 mH
Qms	11.03
Qes	0.36

MOUNTING INFORMATION

Recommended Enclosure Volume	25.49–76.46 liters, 0.9–2.7 cu.ft.
Sealed	
Vented	33.98–99.11 liters, 1.2–3.5 cu.ft.
Qts	0.35
Driver Volume Displaced	0.106 cu.ft., 3 liters
Vas	1.9 cu.ft., 53.68 liters
Overall Diameter	12.38", 314.5 mm
Vd	338.2 cc
Baffle Hole Diameter	11.06", 280.9 mm
Cms	0.13 mm/N
Front Sealing Gasket	Yes
BL	19.56 T-M
Rear Sealing Gasket	Yes
Mms	78 grams
Mounting Holes Diameter	0.27", 6.9 mm
EBP	142
Mounting Holes B.C.D.	11.69", 296.9 mm
Xmax	6.2 mm
Depth	5.32", 135.1 mm
Sd	545.4 cm2
Net Weight	22.5 lbs , 10.21 kg
Xlim	11.2 mm
Shipping Weight	24.8 lbs , 11.25 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

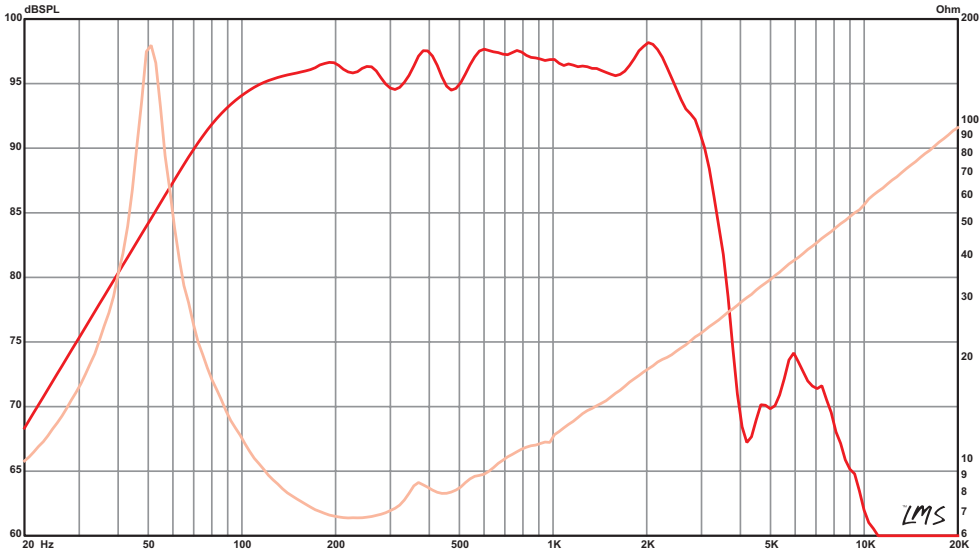

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

PROFESSIONAL SERIES

LA 12850

A high power 12 inch woofer in a shallow cast frame designed to work in ultra-compact vented systems and allow very tight packaging in line arrays or other systems where overall depth is limited.

- 1600 W Program Power
- 12” Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	12", 305 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	1600 W
Nominal Power	800 W
Resonance	46 Hz
Usable Frequency Range	63 Hz – 2.1 kHz
Sensitivity*	95.9 dB
Magnet Weight	109 oz.
Gap Height	0.375", 9.5 mm
Voice Coil Diameter	4", 102 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Polyimide former
- Ferrite magnet
- Core and Spider Land extended
- Die-cast aluminum basket
- Water resistant treated paper cone
- Paper cone edge
- Water resistant treated paper dust cap




THIELE & SMALL PARAMETERS

Fs	46 Hz
Re	5.87 Ω
Le	0.96 mH
Qms	12.73
Qes	0.32

MOUNTING INFORMATION

Recommended Enclosure Volume	N/A
Sealed	
Vented	31.15–77.87 liters, 1.1–2.75 cu.ft.
Qts	0.32
Driver Volume Displaced	0.102 cu.ft., 2.9 liters
Vas	2.33 cu.ft., 66.07 liters
Overall Diameter	12.32", 312.9 mm
Vd	272.7 cc
Baffle Hole Diameter	11.08", 281.4 mm
Cms	0.16 mm/N
Front Sealing Gasket	Yes
BL	19.51 T-M
Rear Sealing Gasket	Yes
Mms	73 grams
Mounting Holes Diameter	0.27", 6.8 mm
EBP	142
Mounting Holes B.C.D.	11.69", 297 mm
Xmax	5 mm
Depth	4.7", 119.4 mm
Sd	545.4 cm2
Net Weight	20.5 lbs , 9.3 kg
Xlim	14 mm
Shipping Weight	22.25 lbs , 10.09 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

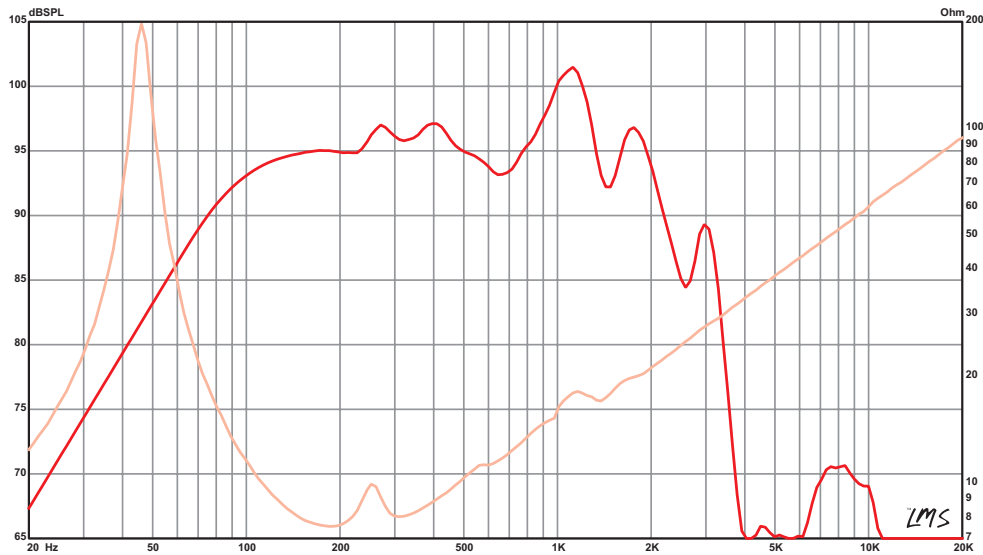

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

PROFESSIONAL SERIES

DEFINIMAX™ 4012ULF

A high-power, ultra-low frequency enhanced version of the popular Definimax 4012HO. Perfect for horn loading, or in micro-sized vented subwoofers for lots of clean punch and deep lows.

- 2400 W Program Power
- 12” Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input type="checkbox"/>
Midbass	<input type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input checked="" type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	12", 305 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	2400 W
Nominal Power	1200 W
Resonance	40 Hz
Usable Frequency Range	37 Hz – 0.2 kHz
Sensitivity*	90.7 dB
Magnet Weight	109 oz.
Gap Height	0.375", 9.5 mm
Voice Coil Diameter	4", 102 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Kapton former
- Ferrite magnet
- Undercut with aluminum shorting ring and Core Periphery Ventilation
- Die-cast aluminum basket
- Water resistant paper cone
- Cloth cone edge
- Water resistant treated paper dust cap




THIELE & SMALL PARAMETERS

Fs	40 Hz
Re	6.2 Ω
Le	4.32 mH
Qms	12.13
Qes	0.32

MOUNTING INFORMATION

Recommended Enclosure Volume	N/A
Sealed	
Vented	42.48–113.27 liters, 1.5–4 cu.ft.
Qts	0.31
Driver Volume Displaced	0.106 cu.ft., 3 liters
Vas	1.46 cu.ft., 41.3 liters
Overall Diameter	12.38", 314.5 mm
Vd	365.4 cc
Baffle Hole Diameter	11.07", 281.2 mm
Cms	0.1 mm/N
Front Sealing Gasket	Yes
BL	27.38 T-M
Rear Sealing Gasket	Yes
Mms	153 grams
Mounting Holes Diameter	0.27", 6.9 mm
EBP	126
Mounting Holes B.C.D.	11.69", 296.9 mm
Xmax	6.7 mm
Depth	5.32", 135.1 mm
Sd	545.4 cm2
Net Weight	22.3 lbs , 10.12 kg
Xlim	15.5 mm
Shipping Weight	24.6 lbs , 11.16 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

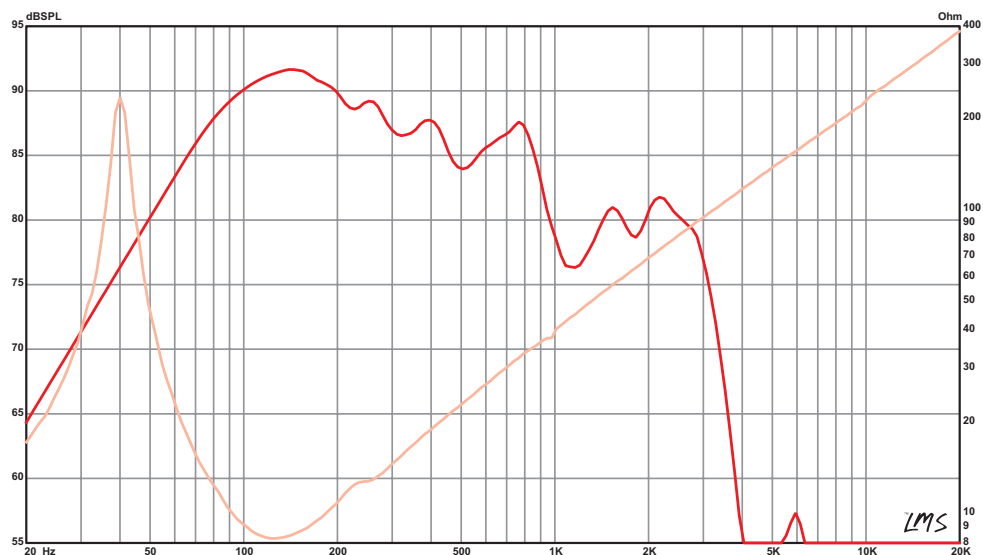

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

PROFESSIONAL SERIES

DELTA PRO-15A

Highly sensitive midbass with full range capability. Recommended for professional audio in both sealed and vented enclosures. Ideal for full-range, mid/hi, and monitor wedges.

- 800 W Program Power
- 15" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	15", 381 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	800 W
Nominal Power	400 W
Resonance	42 Hz
Usable Frequency Range	54 Hz – 4.2 kHz
Sensitivity*	101.6 dB
Magnet Weight	80 oz.
Gap Height	0.375", 9.5 mm
Voice Coil Diameter	2.5", 64 mm

MATERIALS OF CONSTRUCTION

- Aluminum voice coil
- Polyimide former
- Ferrite magnet
- Vented and extended core
- Die-cast aluminum basket
- Paper cone
- Cloth cone edge
- Solid composition paper dust cap



THIELE & SMALL PARAMETERS


Fs	42 Hz
Re	5.71 Ω
Le	0.83 mH
Qms	4.73
Qes	0.44

Qts	0.4
Vas	8.6 cu.ft., 243.5 liters
Vd	368 cc
Cms	0.24 mm/N
BL	14.5 T-M
Mms	61 grams
EBP	95
Xmax	4.3 mm
Sd	856.3 cm2
Xlim	13.7 mm

MOUNTING INFORMATION

Recommended Enclosure Volume	28–42.5 liters,
Sealed	1–1.5 cu.ft.
Vented	57–133 liters,
	2–4.7 cu.ft.
Driver Volume Displaced	0.138 cu.ft., 3.92 liters
Overall Diameter	15.32", 389.1 mm
Baffle Hole Diameter	14", 355.6 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.28", 7.1 mm
Mounting Holes B.C.D.	14.56", 369.8 mm
Depth	6.06", 153.9 mm
Net Weight	17 lbs , 7.71 kg
Shipping Weight	19.1 lbs , 8.66 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

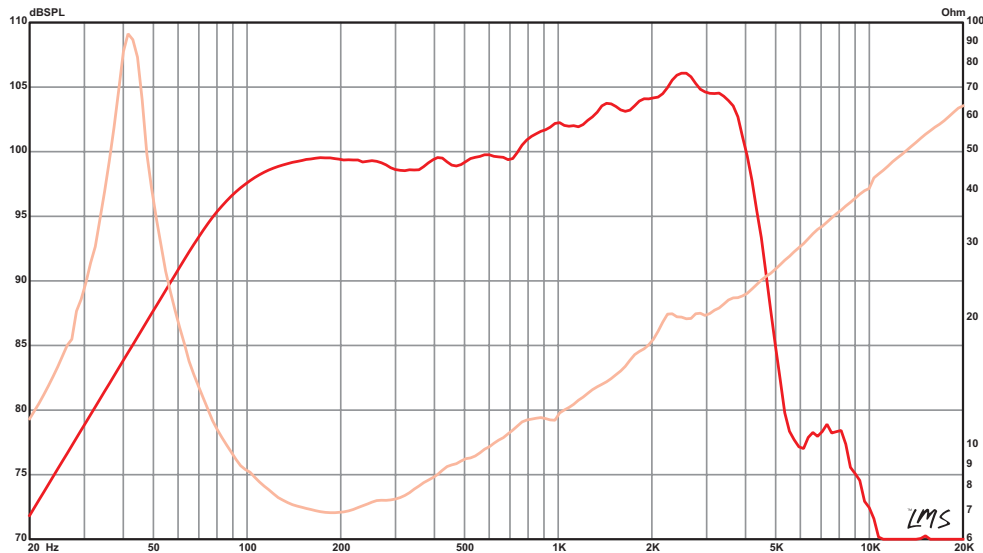

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

PROFESSIONAL SERIES

KAPPA PRO-15A

Recommended for professional audio in a vented midbass or bass enclosure. Also suitable for bass guitar.

- 1000 W Program Power
- 15" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input checked="" type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input type="checkbox"/>
Bass Guitar	<input checked="" type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	15", 381 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	1000 W
Nominal Power	500 W
Resonance	47 Hz
Usable Frequency Range	46 Hz – 4 kHz
Sensitivity*	101 dB
Magnet Weight	80 oz.
Gap Height	0.375", 9.5 mm
Voice Coil Diameter	3", 76 mm

MATERIALS OF CONSTRUCTION

- Aluminum voice coil
- Polyimide former
- Ferrite magnet
- Vented core
- Die-cast aluminum basket
- Paper cone
- Cloth cone edge
- Solid composition paper dust cap



THIELE & SMALL PARAMETERS


Fs	47 Hz
Re	5.23 Ω
Le	1.01 mH
Qms	8.01
Qes	0.4

Qts	0.38
Vas	5.92 cu.ft., 167.7 liters
Vd	274 cc
Cms	0.16 mm/N
BL	16.6 T-M
Mms	72 grams
EBP	118
Xmax	3.2 mm
Sd	856.3 cm2
Xlim	13.2 mm

MOUNTING INFORMATION

Recommended Enclosure Volume	N/A
Sealed	
Vented	54–184 liters,
	1.9–6.5 cu.ft.
Driver Volume Displaced	0.138 cu.ft., 3.92 liters
Overall Diameter	15.32", 389.1 mm
Baffle Hole Diameter	14", 355.6 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.28", 7.1 mm
Mounting Holes B.C.D.	14.56", 369.8 mm
Depth	6.06", 153.9 mm
Net Weight	16.9 lbs , 7.67 kg
Shipping Weight	19.5 lbs , 8.85 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

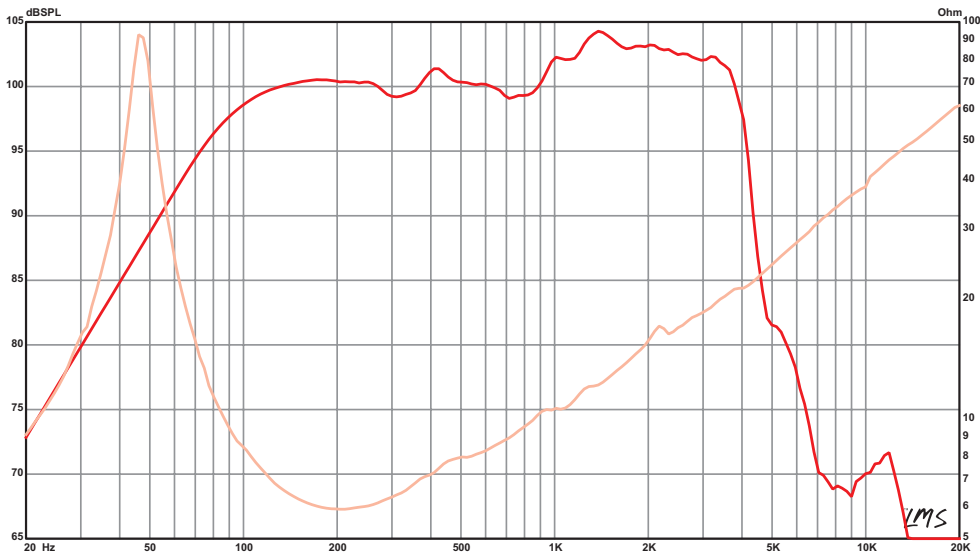

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

PROFESSIONAL SERIES

KAPPA PRO-15LF-2

Long throw, low frequency woofer recommended for pro audio in a vented bass enclosure.

- 1200 W Program Power
- 15" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input type="checkbox"/>
Midbass	<input type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input checked="" type="checkbox"/>
Subwoofer	<input checked="" type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input checked="" type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	15", 381 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	1200 W
Nominal Power	600 W
Resonance	35 Hz
Usable Frequency Range	38 Hz – 1.8 kHz
Sensitivity*	97.8 dB
Magnet Weight	120 oz.
Gap Height	0.375", 9.5 mm
Voice Coil Diameter	3", 76 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Polyimide former
- Ferrite magnet
- Vented and extended core
- Die-cast aluminum basket
- Paper cone
- Cloth cone edge
- Solid composition paper dust cap




THIELE & SMALL PARAMETERS

Fs	35 Hz
Re	6.5 Ω
Le	1.4 mH
Qms	7.3
Qes	0.32

MOUNTING INFORMATION

Recommended Enclosure Volume	N/A
Sealed	
Vented	76.5–164 liters, 2.7–5.8 cu.ft.
Qts	0.3
Driver Volume Displaced	0.152 cu.ft., 4.31 liters
Vas	7.02 cu.ft., 198.8 liters
Overall Diameter	15.21", 386.3 mm
Vd	571.2 cc
Baffle Hole Diameter	14", 355.6 mm
Cms	0.2 mm/N
Front Sealing Gasket	Yes
BL	21.6 T-M
Rear Sealing Gasket	Yes
Mms	102 grams
Mounting Holes Diameter	0.28", 7.1 mm
EBP	112
Mounting Holes B.C.D.	14.56", 369.8 mm
Xmax	6.7 mm
Depth	6.57", 166.9 mm
Sd	856.3 cm2
Net Weight	22.3 lbs , 10.12 kg
Xlim	18 mm
Shipping Weight	24.8 lbs , 11.25 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

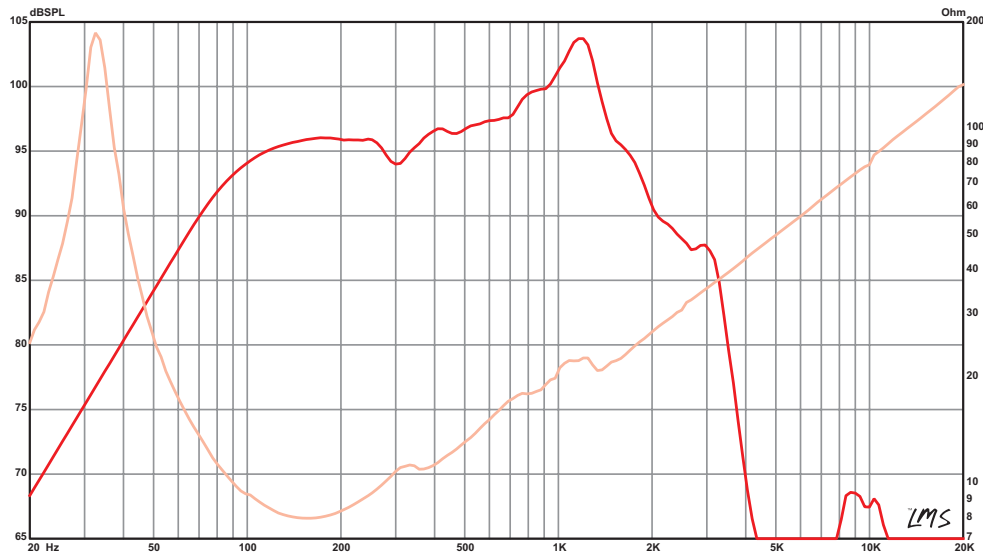

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

PROFESSIONAL SERIES

LAB15

Subwoofer suited for small vented boxes. Also suitable for horn loading. THE sub for electronic dance music (EDM).

- 1200 W Program Power
- 15" Nominal Diameter
- 6 Ω


APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input checked="" type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	15", 381 mm
Nominal Impedance*	6 Ω
Power Rating*	
Program Power	1200 W
Nominal Power	600 W
Resonance	28 Hz
Usable Frequency Range	20 Hz – 0.1 kHz
Sensitivity*	88.5 dB
Magnet Weight	160 oz.
Gap Height	0.375", 9.5 mm
Voice Coil Diameter	3", 76 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Aluminum former
- Double stacked 80 oz. ferrite magnets
- Vented and extended core
- Die-cast aluminum basket
- Kevlar-reinforced paper cone
- Foam cone edge
- water resistant treated solid composition paper

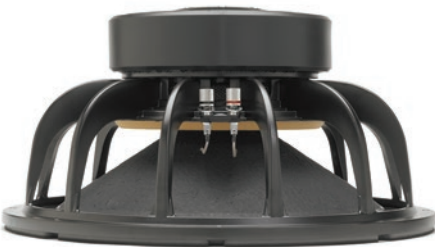


THIELE & SMALL PARAMETERS

Fs	28 Hz
Re	4.9 Ω
Le	3.23 mH
Qms	5.36
Qes	0.37

MOUNTING INFORMATION

Recommended Enclosure Volume	35–108 liters, 1.2–3.8 cu.ft.
Sealed	
Vented	71–290 liters, 2.5–10.3 cu.ft.
Qts	0.35
Driver Volume Displaced	0.158 cu.ft., 4.46 liters
Vas	3.66 cu.ft., 103.61 liters
Overall Diameter	15.34", 389.6 mm
Vd	968 cc
Baffle Hole Diameter	14", 355.6 mm
Cms	0.11 mm/N
Front Sealing Gasket	Yes
BL	26.7 T-M
Rear Sealing Gasket	N/A
Mms	308 grams
Mounting Holes Diameter	0.26", 6.6 mm
EBP	75
Mounting Holes B.C.D.	14.7", 373.4 mm
Xmax	11.8 mm
Depth	7.75", 196.9 mm
Sd	823.7 cm2
Net Weight	23.8 lbs , 10.8 kg
Xlim	22 mm
Shipping Weight	26 lbs , 11.79 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

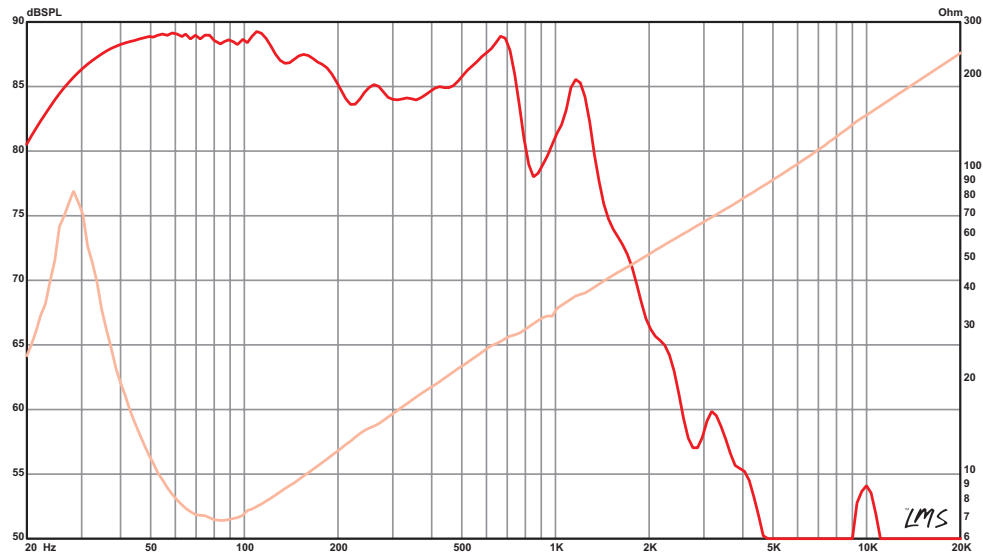

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

PROFESSIONAL SERIES

LA 15850

Shallow 15 inch high power cast frame woofer with a 4 inch voice coil and super strong cone body. The inverted dust cap allows close placement to phase plugs used in many horn loaded designs.

- 1600 W Program Power
- 15" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input checked="" type="checkbox"/>
Subwoofer	<input checked="" type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	15", 381 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	1600 W
Nominal Power	800 W
Resonance	34 Hz
Usable Frequency Range	45 Hz – 1.5 KHz
Sensitivity*	96.2 dB
Magnet Weight	109 oz.
Gap Height	0.375", 9.5 mm
Voice Coil Diameter	4", 102 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Polyimide former
- Ferrite magnet
- Core and Spider Land extended
- Die-cast aluminum basket
- Water resistant treated paper cone
- Paper cone edge
- Water resistant treated paper dust cap




THIELE & SMALL PARAMETERS

Fs	34 Hz
Re	5.83 Ω
Le	1 mH
Qms	9.27
Qes	0.34

MOUNTING INFORMATION

Recommended Enclosure Volume	N/A
Sealed	
Vented	46.72–127.43 liters, 1.65–4.5 cu.ft.
Qts	0.33
Vas	8.27 cu.ft., 234.15 liters
Vd	351.1 cc
Cms	0.23 mm/N
BL	18.98 T-M
Mms	98 grams
EBP	100
Xmax	4.1 mm
Sd	856.3 cm2
Xlim	12.2 mm
Driver Volume Displaced	0.145 cu.ft., 4.1 liters
Major Diameter	15.3", 388.6 mm
Flat to Flat Diameter	14.08", 357.6 mm
Baffle Hole Diameter	
Front Sealing Gasket	Yes
Rear Sealing Gasket	0.26", 6.5 mm
Mounting Holes Diameter	14.57", 370.1 mm
Mounting Holes B.C.D.	5.5", 139.7 mm
Depth	21.4 lbs, 9.71 kg
Net Weight	23.6 lbs, 10.7 kg
Shipping Weight	

FREQUENCY RESPONSE & IMPEDANCE CURVE*

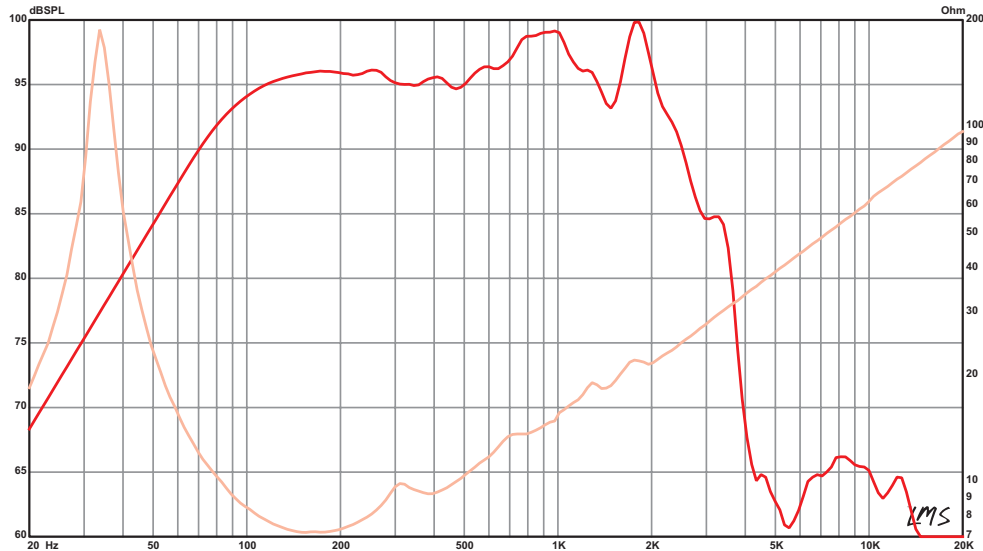

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

PROFESSIONAL SERIES

OMEGA PRO-15A

High power driver for pro audio as a woofer in vented enclosures. Also suitable for horn loading and scoops.

- 1600 W Program Power
- 15" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input type="checkbox"/>
Midbass	<input type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input checked="" type="checkbox"/>
Subwoofer	<input checked="" type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input checked="" type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	15", 381 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	1600 W
Nominal Power	800 W
Resonance	33 Hz
Usable Frequency Range	51 Hz – 1.7 KHz
Sensitivity*	97.3 dB
Magnet Weight	109 oz.
Gap Height	0.375", 9.5 mm
Voice Coil Diameter	4", 102 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Polyimide former
- Ferrite magnet
- Vented and extended core
- Die-cast aluminum basket
- Paper cone
- Cloth cone edge
- Solid composition paper dust cap




THIELE & SMALL PARAMETERS

Fs	33 Hz
Re	5.28 Ω
Le	1.04 mH
Qms	5.69
Qes	0.33

MOUNTING INFORMATION

Recommended Enclosure Volume	N/A
Sealed	
Vented	57–108 liters, 2–3.8 cu.ft.
Qts	0.32
Vas	9.13 cu.ft., 258.5 liters
Vd	411 cc
Cms	0.25 mm/N
BL	17.5 T-M
Mms	94 grams
EBP	99
Xmax	4.8 mm
Sd	856.3 cm2
Xlim	12.2 mm
Driver Volume Displaced	0.152 cu.ft., 4.31 liters
Overall Diameter	15.21", 386.3 mm
Baffle Hole Diameter	14", 355.6 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.28", 7.1 mm
Mounting Holes B.C.D.	14.56", 369.8 mm
Depth	6.35", 161.3 mm
Net Weight	22.7 lbs, 10.3 kg
Shipping Weight	25.2 lbs, 11.43 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

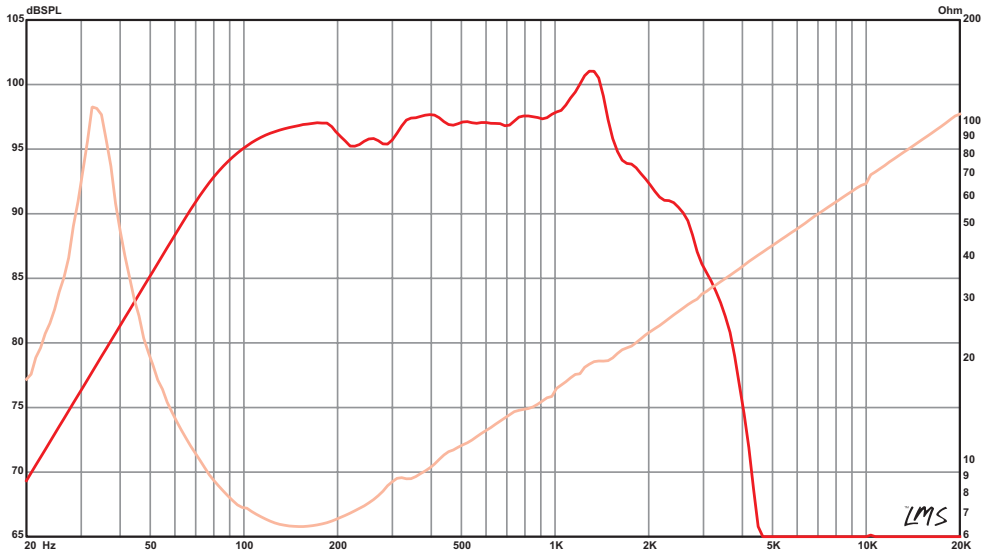

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

PROFESSIONAL SERIES

DEFINIMAX™ 4015LF

Recommended for professional audio and bass guitar as a low distortion woofer or subwoofer in vented enclosures. Also works in a sealed enclosure for bass guitar.

- 2400 W Program Power
- 15" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input checked="" type="checkbox"/>
Subwoofer	<input checked="" type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input checked="" type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	15", 381 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	2400 W
Nominal Power	1200 W
Resonance	40 Hz
Usable Frequency Range	39 Hz – 1.2 kHz
Sensitivity*	94.7 dB
Magnet Weight	109 oz.
Gap Height	0.375", 9.5 mm
Voice Coil Diameter	4", 102 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Polyimide former
- Ferrite magnet
- Undercut with aluminum shorting ring and Core Periphery Ventilation
- Die-cast aluminum basket
- Water resistant paper cone
- Cloth cone edge
- Water resistant treated paper dust cap




THIELE & SMALL PARAMETERS

Fs	40 Hz
Re	5.18 Ω
Le	1.48 mH
Qms	11.94
Qes	0.54

MOUNTING INFORMATION

Recommended Enclosure Volume	43.89–99.11 liters,
Sealed	1.55–3.5 cu.ft.
Vented	67.96–205.3 liters,
	2.4–7.25 cu.ft.
Driver Volume Displaced	0.152 cu.ft., 4.31 liters
Overall Diameter	15.21", 386.3 mm
Baffle Hole Diameter	14", 355.6 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.28", 7.1 mm
Mounting Holes B.C.D.	14.56", 369.8 mm
Depth	6.56", 166.6 mm
Net Weight	23.7 lbs , 10.75 kg
Shipping Weight	26 lbs , 11.79 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

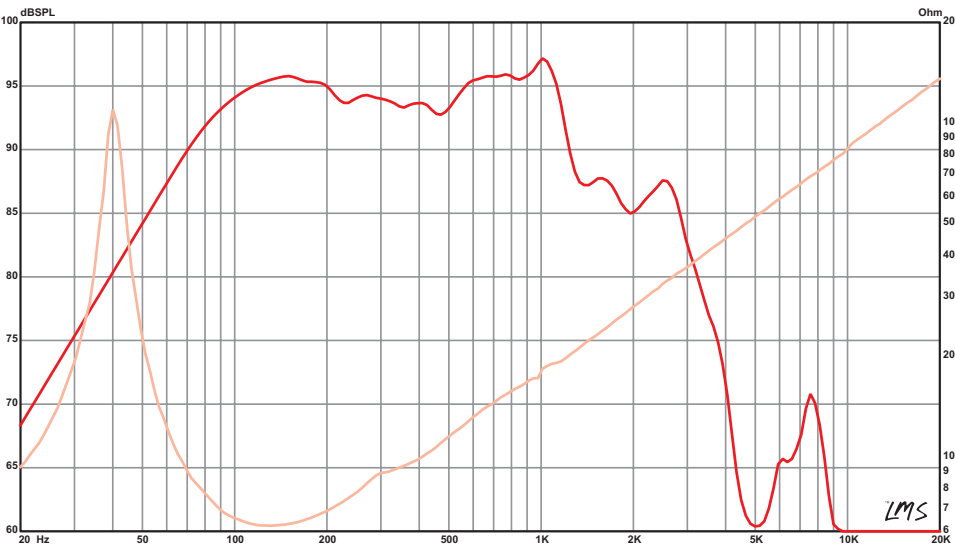

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

PROFESSIONAL SERIES

DEFINIMAX™ 4015ULF

A high-power, ultra-low frequency enhanced version of the popular Definimax 4015LF. Perfect for horn loading, or in small to medium-sized vented subwoofers for lots of clean punch and deep lows.

- 2400 W Program Power
- 15" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input type="checkbox"/>
Midbass	<input type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input checked="" type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	15", 381 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	2400 W
Nominal Power	1200 W
Resonance	38 Hz
Usable Frequency Range	35 Hz – 0.2 kHz
Sensitivity*	93 dB
Magnet Weight	109 oz.
Gap Height	0.375", 9.5 mm
Voice Coil Diameter	4", 102 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Kapton former
- Ferrite magnet
- Undercut with aluminum shorting ring and Core Periphery Ventilation
- Die-cast aluminum basket
- Water resistant paper cone
- Cloth cone edge
- Water resistant treated paper dust cap




THIELE & SMALL PARAMETERS

Fs	38 Hz
Re	6.19 Ω
Le	4.43 mH
Qms	10.27
Qes	0.35

MOUNTING INFORMATION

Recommended Enclosure Volume	N/A
Sealed	
Vented	48.14–148.66 liters,
	1.7–5.25 cu.ft.
Driver Volume Displaced	0.152 cu.ft., 4.31 liters
Overall Diameter	15.21", 386.3 mm
Baffle Hole Diameter	14", 355.6 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.28", 7.1 mm
Mounting Holes B.C.D.	14.56", 369.8 mm
Depth	6.56", 166.6 mm
Net Weight	23.7 lbs , 10.75 kg
Shipping Weight	26 lbs , 11.79 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

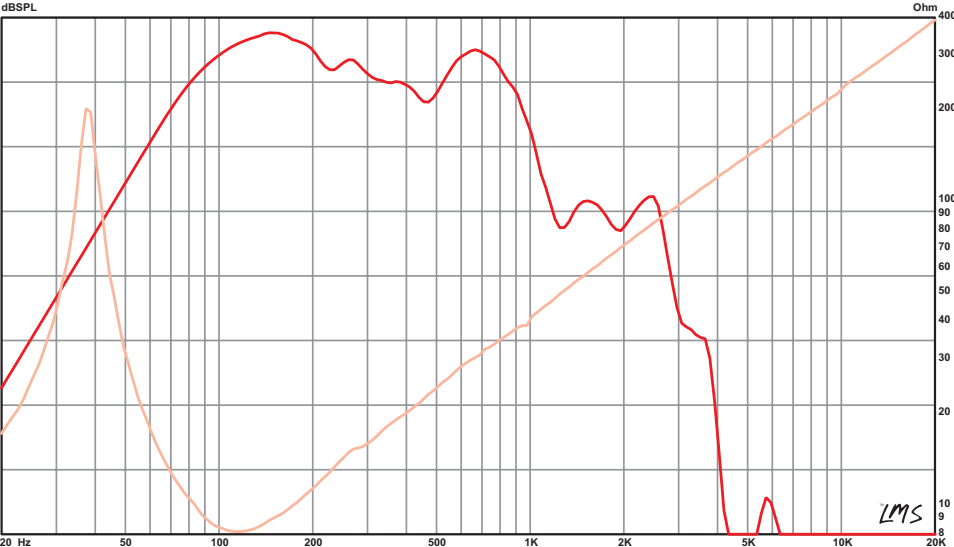

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

PROFESSIONAL SERIES

KILOMAX® PRO 15A

Recommended for professional audio subwoofer and woofer applications in vented enclosures.

- 2500 W Program Power
- 15” Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input type="checkbox"/>
Midbass	<input type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input checked="" type="checkbox"/>
Subwoofer	<input checked="" type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	15", 381 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	2500 W
Nominal Power	1250 W
Resonance	41 Hz
Usable Frequency Range	44 Hz – 0.8 kHz
Sensitivity*	95.5 dB
Magnet Weight	109 oz.
Gap Height	0.375", 9.5 mm
Voice Coil Diameter	4", 102 mm

MATERIALS OF CONSTRUCTION

Copper voice coil
Polyimide former
Ferrite magnet
Extended core with Core Periphery Ventilation
Die-cast aluminum basket
Paper cone
Cloth cone edge
Porous cloth top spider/ heatsink




THIELE & SMALL PARAMETERS

Fs	41 Hz
Re	4.97 Ω
Le	1.78 mH
Qms	8.8
Qes	0.4

MOUNTING INFORMATION

Recommended Enclosure Volume	N/A
Sealed	
Vented	82–176 liters, 2.9–6.2 cu.ft.
Qts	0.39
Driver Volume Displaced	0.152 cu.ft., 4.31 liters
Vas	5.46 cu.ft., 154.5 liters
Overall Diameter	15.21", 386.3 mm
Vd	677 cc
Baffle Hole Diameter	14", 355.6 mm
Cms	0.15 mm/N
Front Sealing Gasket	Yes
BL	17.7 T-M
Rear Sealing Gasket	Yes
Mms	98 grams
Mounting Holes Diameter	0.28", 7.1 mm
EBP	103
Mounting Holes B.C.D.	14.56", 369.8 mm
Xmax	7.9 mm
Depth	6.42", 163.1 mm
Sd	856.3 cm2
Net Weight	24.7 lbs , 11.2 kg
Xlim	13.5 mm
Shipping Weight	27.1 lbs , 12.29 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

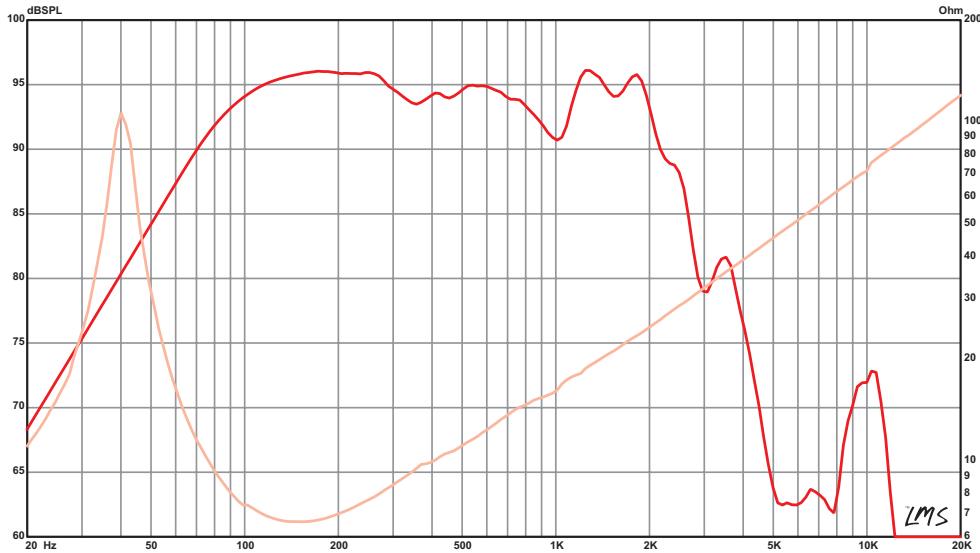

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

PROFESSIONAL SERIES

DELTA PRO-18A

Long throw subwoofer for very small vented boxes. Over-sized top plate and large pole vent help keep the coil cool.

- 1000 W Program Power
- 18” Nominal Diameter
- 8 or 4 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input type="checkbox"/>
Midbass	<input type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input type="checkbox"/>	Scoop Loading	<input checked="" type="checkbox"/>
Subwoofer	<input checked="" type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	18", 457 mm
Nominal Impedance*	8 or 4 Ω
Power Rating*	
Program Power	1000 W
Nominal Power	500 W
Resonance	28 Hz
Usable Frequency Range	37 Hz – 0.2 kHz
Sensitivity*	96 dB
Magnet Weight	67 oz.
Gap Height	0.38", 9.7 mm
Voice Coil Diameter	2.5", 64 mm

MATERIALS OF CONSTRUCTION

Copper voice coil
Polyimide former
Ferrite magnet
Vented and extended core
Die-cast aluminum basket
Paper cone
Cloth cone edge
Solid composition paper dust cap




THIELE & SMALL PARAMETERS

Fs	28 Hz
Re	5.3 Ω
Le	3.43 mH
Qms	10.38
Qes	0.33

MOUNTING INFORMATION

Recommended Enclosure Volume	N/A
Sealed	
Vented	85–297 liters, 3–10.5 cu.ft.
Qts	0.32
Driver Volume Displaced	0.212 cu.ft., 6.01 liters
Vas	17.42 cu.ft., 493.2 liters
Overall Diameter	18", 457.2 mm
Vd	796 cc
Baffle Hole Diameter	16.57", 420.9 mm
Cms	0.25 mm/N
Front Sealing Gasket	Yes
BL	18.9 T-M
Rear Sealing Gasket	Yes
Mms	128 grams
Mounting Holes Diameter	0.28", 7.1 mm
EBP	84
Mounting Holes B.C.D.	17.25", 438.2 mm
Xmax	6.7 mm
Depth	8.13", 206.5 mm
Sd	1188 cm2
Net Weight	17 lbs , 7.71 kg
Xlim	15 mm
Shipping Weight	20.5 lbs , 9.3 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

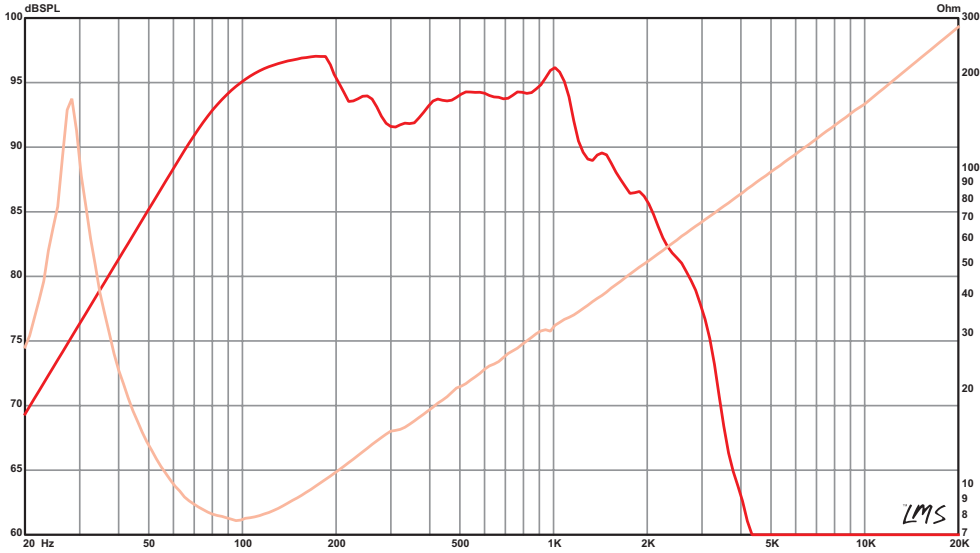

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

PROFESSIONAL SERIES

SIGMA PRO 18A-2

High efficiency, high value pro audio woofer for vented enclosures. Gives you the most from your low powered amp.

- 1300 W Program Power
- 18" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input type="checkbox"/>
Midbass	<input type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input checked="" type="checkbox"/>	Horn Loading	<input type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	18", 457 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	1300 W
Nominal Power	650 W
Resonance	28 Hz
Usable Frequency Range	41 Hz – 2.4 kHz
Sensitivity*	99 dB
Magnet Weight	120 oz.
Gap Height	0.375", 9.5 mm
Voice Coil Diameter	3", 76 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Polyimide former
- Ferrite magnet
- Vented and extended core
- Die-cast aluminum basket
- Paper cone
- Cloth cone edge
- Solid composition paper dust cap




THIELE & SMALL PARAMETERS

Fs	28 Hz
Re	6.29 Ω
Le	1.9 mH
Qms	8.28
Qes	0.3

MOUNTING INFORMATION

Recommended Enclosure Volume	N/A
Sealed	
Vented	93–212 liters, 3.3–7.5 cu.ft.
Qts	0.29
Driver Volume Displaced	0.234 cu.ft., 6.62 liters
Vas	15.58 cu.ft., 441.2 liters
Overall Diameter	18", 457.2 mm
Vd	695 cc
Baffle Hole Diameter	16.56", 420.6 mm
Cms	0.24 mm/N
Front Sealing Gasket	Yes
BL	22.1 T-M
Rear Sealing Gasket	Yes
Mms	130 grams
Mounting Holes Diameter	0.28", 7.1 mm
EBP	93
Mounting Holes B.C.D.	17.25", 438.2 mm
Xmax	6.1 mm
Depth	8.15", 207 mm
Sd	1140 cm2
Net Weight	24.5 lbs , 11.11 kg
Xlim	18 mm
Shipping Weight	28.1 lbs , 12.75 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

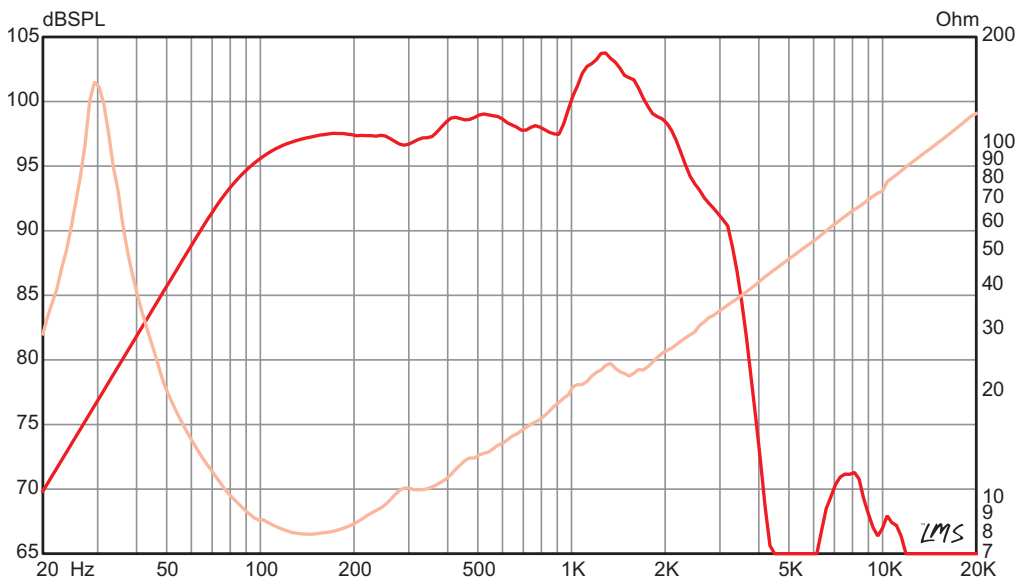

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

PROFESSIONAL SERIES

SIGMA PRO 18-4

High efficiency, high value pro audio woofer for vented enclosures. Gives you the most from your low powered amp.

- 1400 W Program Power
- 18" Nominal Diameter
- 4 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input type="checkbox"/>
Midbass	<input type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input checked="" type="checkbox"/>	Horn Loading	<input type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	18", 457 mm
Nominal Impedance*	4 Ω
Power Rating*	
Program Power	1400 W
Nominal Power	700 W
Resonance	32 Hz
Usable Frequency Range	32 Hz – 2 kHz
Sensitivity*	97.6 dB
Magnet Weight	120 oz.
Gap Height	0.375", 9.5 mm
Voice Coil Diameter	3", 76 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Polyimide former
- Ferrite magnet
- Vented and extended core
- Die-cast aluminum basket
- Paper cone
- Cloth cone edge
- Solid composition paper dust cap




THIELE & SMALL PARAMETERS

Fs	32 Hz
Re	3.35 Ω
Le	0.85 mH
Qms	14.79
Qes	0.3

MOUNTING INFORMATION

Recommended Enclosure Volume	N/A
Sealed	
Vented	84.95–212.38 liters, 3–7.5 cu.ft.
Qts	0.29
Driver Volume Displaced	0.234 cu.ft., 6.62 liters
Vas	12.74 cu.ft., 360.84 liters
Overall Diameter	18", 457.2 mm
Vd	695 cc
Baffle Hole Diameter	16.56", 420.6 mm
Cms	0.2 mm/N
Front Sealing Gasket	Yes
BL	16.54 T-M
Rear Sealing Gasket	Yes
Mms	121 grams
Mounting Holes Diameter	0.28", 7.1 mm
EBP	107
Mounting Holes B.C.D.	17.25", 438.2 mm
Xmax	7 mm
Depth	8.15", 207 mm
Sd	1140 cm2
Net Weight	24.5 lbs , 11.11 kg
Xlim	18 mm
Shipping Weight	28.1 lbs , 12.75 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

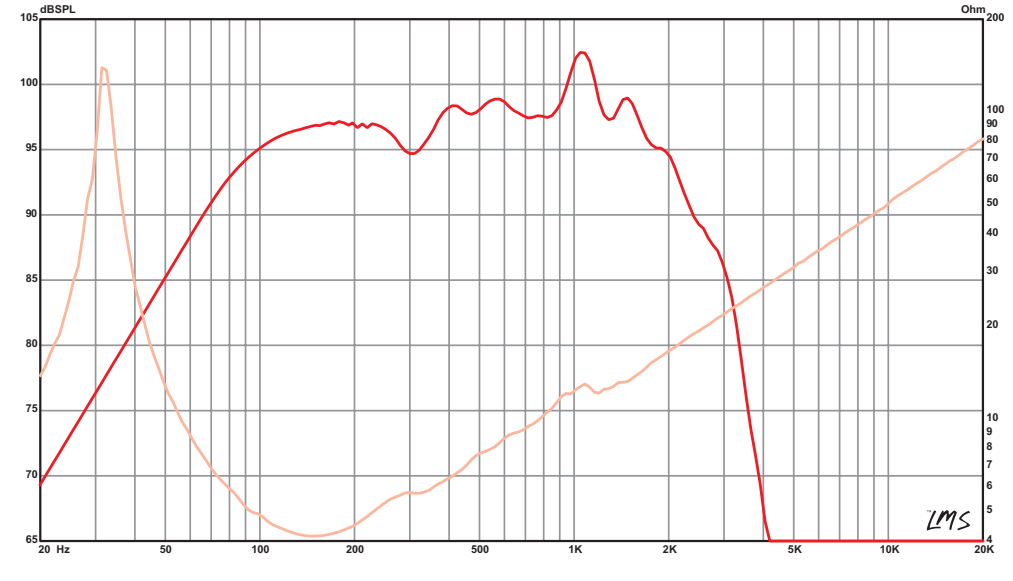

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

PROFESSIONAL SERIES

KAPPA PRO 18LF-8

The Kappa Pro 18LF provides tons of low frequency output in a lightweight, durable cast aluminum chassis. Use it as a subwoofer in small to medium sized boxes, a woofer in large three-way PA enclosures, or as a high-power bass guitar woofer. The 1,600 watt program power rating makes it an easy choice for new box designs or as a replacement for many single and double subwoofer cabinets.

- 1600 W Program Power
- 18” Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input type="checkbox"/>
Midbass	<input type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input checked="" type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input checked="" type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	18", 457 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	1600 W
Nominal Power	800 W
Resonance	32 Hz
Usable Frequency Range	38 Hz – 0.7 kHz
Sensitivity*	98 dB
Magnet Weight	120 oz.
Gap Height	0.37", 9.5 mm
Voice Coil Diameter	3", 76 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Kapton former
- Ferrite magnet
- Vented and extended core
- Die-cast aluminum basket
- Treated paper cone
- Cloth cone edge
- Treated paper dust cap




THIELE & SMALL PARAMETERS

Fs	32 Hz
Re	5.39 Ω
Le	1.21 mH
Qms	10.66
Qes	0.34

MOUNTING INFORMATION

Recommended Enclosure Volume	N/A
Sealed	
Vented	113.27–353.96 liters, 4–12.5 cu.ft.
Qts	0.33
Driver Volume Displaced	0.234 cu.ft., 6.62 liters
Vas	13.83 cu.ft., 391.61 liters
Overall Diameter	18", 457.2 mm
Vd	927.2 cc
Baffle Hole Diameter	16.58", 421.1 mm
Cms	0.21 mm/N
Front Sealing Gasket	Yes
BL	19.39 T-M
Rear Sealing Gasket	Yes
Mms	119 grams
Mounting Holes Diameter	0.28", 7.1 mm
EBP	94
Mounting Holes B.C.D.	17.25", 438.2 mm
Xmax	8 mm
Depth	8.15", 207 mm
Sd	1159 cm2
Net Weight	24.5 lbs , 11.11 kg
Xlim	18 mm
Shipping Weight	28.1 lbs , 12.75 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

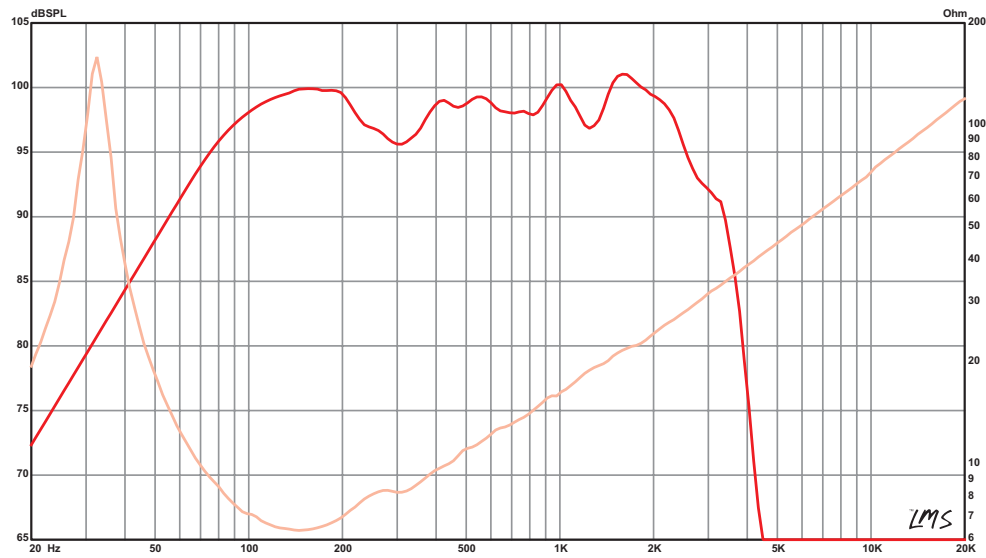

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

PROFESSIONAL SERIES

OMEGA PRO-18A

Recommended for professional audio as a woofer in vented enclosures. The best 18” for horn loading, scoops, and W bins.

- 1600 W Program Power
- 18” Nominal Diameter
- 8 or 4 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input type="checkbox"/>
Midbass	<input type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input checked="" type="checkbox"/>
Subwoofer	<input checked="" type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	18", 457 mm
Nominal Impedance*	8 or 4 Ω
Power Rating*	
Program Power	1600 W
Nominal Power	800 W
Resonance	25 Hz
Usable Frequency Range	40 Hz – 0.8 kHz
Sensitivity*	97 dB
Magnet Weight	109 oz.
Gap Height	0.375", 9.5 mm
Voice Coil Diameter	4", 102 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Polyimide former
- Ferrite magnet
- Vented and extended core
- Die-cast aluminum basket
- Paper cone
- Cloth cone edge
- Solid composition paper dust cap




THIELE & SMALL PARAMETERS

Fs	25 Hz
Re	5.2 Ω
Le	1.67 mH
Qms	8.18
Qes	0.32

MOUNTING INFORMATION

Recommended Enclosure Volume	N/A
Sealed	
Vented	96–198 liters, 3.4–7 cu.ft.
Qts	0.31
Driver Volume Displaced	0.234 cu.ft., 6.62 liters
Vas	19.38 cu.ft., 548.7 liters
Overall Diameter	18", 457.2 mm
Vd	556 cc
Baffle Hole Diameter	16.56", 420.6 mm
Cms	0.29 mm/N
Front Sealing Gasket	Yes
BL	18.8 T-M
Rear Sealing Gasket	Yes
Mms	137 grams
Mounting Holes Diameter	0.28", 7.1 mm
EBP	79
Mounting Holes B.C.D.	17.25", 438.2 mm
Xmax	4.8 mm
Depth	8.15", 207 mm
Sd	1159 cm2
Net Weight	25.2 lbs , 11.43 kg
Xlim	16 mm
Shipping Weight	28.9 lbs , 13.11 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

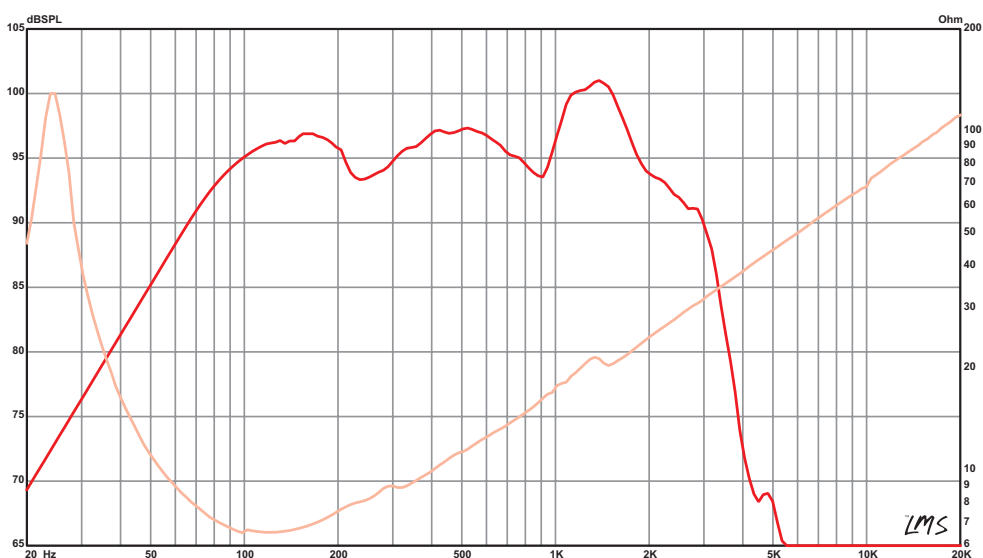

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

PROFESSIONAL SERIES

DEFINIMAX™ 4018LF

Recommended for professional audio and bass as a high power, low distortion subwoofer in single or multi-driver designs.

- 2400 W Program Power
- 18” Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input type="checkbox"/>
Midbass	<input type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input type="checkbox"/>	Scoop Loading	<input checked="" type="checkbox"/>
Subwoofer	<input checked="" type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	18", 457 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	2400 W
Nominal Power	1200 W
Resonance	30 Hz
Usable Frequency Range	31 Hz – 0.2 kHz
Sensitivity*	94.9 dB
Magnet Weight	109 oz.
Gap Height	0.375", 9.5 mm
Voice Coil Diameter	4", 102 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Polyimide former
- Ferrite magnet
- Undercut with aluminum shorting ring and Core Periphery Ventilation
- Die-cast aluminum basket
- Water resistant paper cone
- Cloth cone edge
- Water resistant treated paper dust cap




THIELE & SMALL PARAMETERS

Fs	30 Hz
Re	6.1 Ω
Le	4.54 mH
Qms	11.95
Qes	0.35

MOUNTING INFORMATION

Recommended Enclosure Volume	N/A
Sealed	
Vented	99.11–226.54 liters, 3.5–8 cu.ft.
Driver Volume Displaced	0.234 cu.ft., 6.62 liters
Overall Diameter	18", 457.2 mm
Baffle Hole Diameter	16.56", 420.6 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.28", 7.1 mm
Mounting Holes B.C.D.	17.25", 438.2 mm
Depth	8.13", 206.5 mm
Net Weight	24 lbs , 10.89 kg
Shipping Weight	26 lbs , 11.79 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

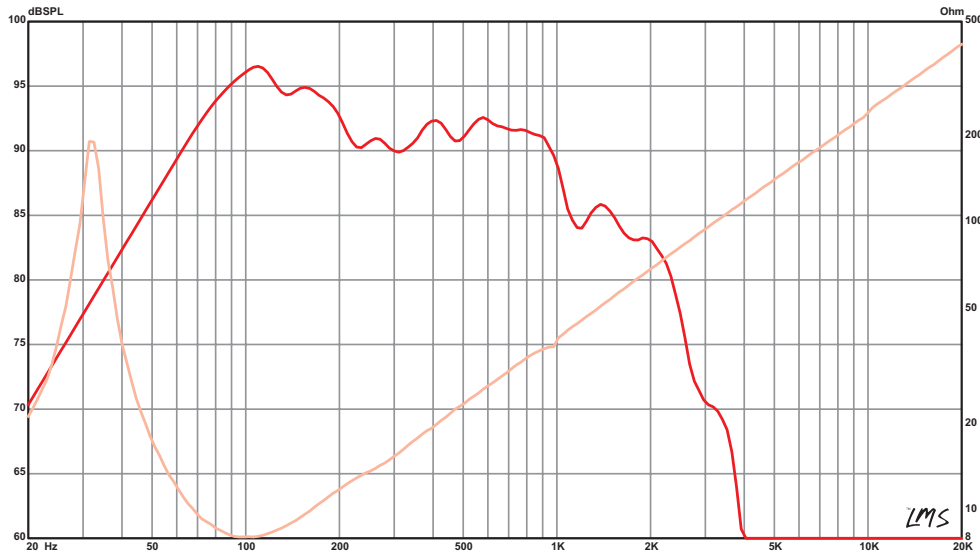

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

PROFESSIONAL SERIES

IMPERO™ 18A

High power driver recommended for pro audio in vented enclosures. Suited for full-range three-way boxes, bass guitar boxes, and small subwoofers.

- 2400 W Program Power
- 18” Nominal Diameter
- 8 or 4 Ω


APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input type="checkbox"/>
Midbass	<input type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input type="checkbox"/>	Scoop Loading	<input checked="" type="checkbox"/>
Subwoofer	<input checked="" type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input checked="" type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	18", 457 mm
Nominal Impedance*	8 or 4 Ω
Power Rating*	
Program Power	2400 W
Nominal Power	1200 W
Resonance	33 Hz
Usable Frequency Range	39 Hz – 0.8 kHz
Sensitivity*	95.9 dB
Magnet Weight	109 oz.
Gap Height	0.5", 12.7 mm
Voice Coil Diameter	4", 102 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Fiberglass former
- Ferrite magnet
- Bumped Vented Extended core
- Die-cast aluminum basket
- Water resistant paper cone
- Treated cloth cone edge
- Water resistant treated paper dust cap

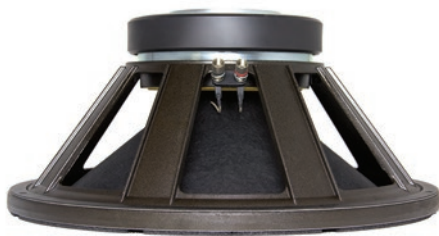


THIELE & SMALL PARAMETERS

Fs	33 Hz
Re	5.41 Ω
Le	1.47 mH
Qms	14.02
Qes	0.44

MOUNTING INFORMATION

Recommended Enclosure Volume	N/A
Sealed	
Vented	113.27–277.51 liters, 4–9.8 cu.ft.
Driver Volume Displaced	0.237 cu.ft., 6.7 liters
Overall Diameter	18", 457.2 mm
Baffle Hole Diameter	16.56", 420.6 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.28", 7.1 mm
Mounting Holes B.C.D.	17.25", 438.2 mm
Depth	8.31", 211.1 mm
Net Weight	27.3 lbs , 12.38 kg
Shipping Weight	30.8 lbs , 13.97 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

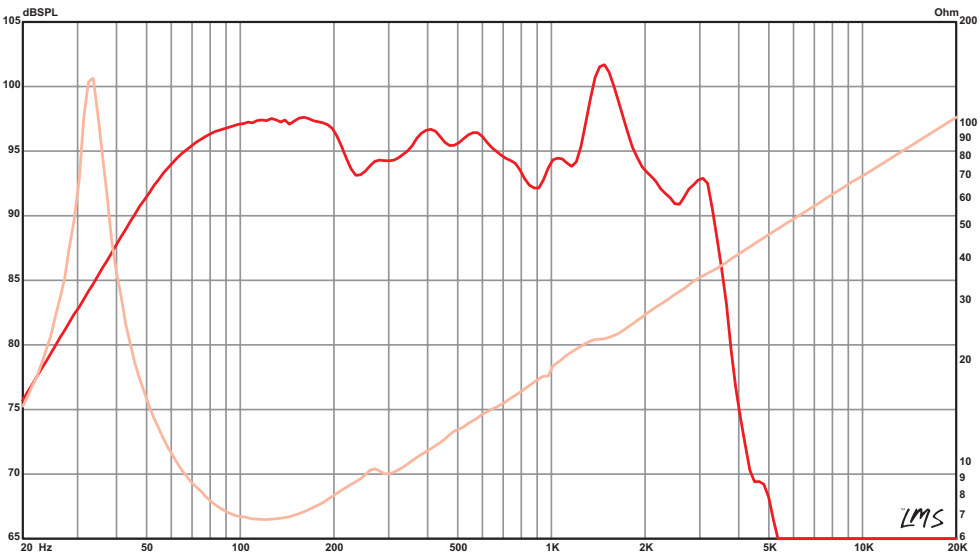

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

PROFESSIONAL SERIES

KILOMAX® PRO 18A

Recommended for professional audio subwoofer and woofer applications in sealed and vented enclosures. Not for horn-loading or scoops.

- 2500 W Program Power
- 18" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input checked="" type="checkbox"/>	Horn Loading	<input type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	18", 457 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	2500 W
Nominal Power	1250 W
Resonance	32 Hz
Usable Frequency Range	33 Hz – 0.3 kHz
Sensitivity*	95.8 dB
Magnet Weight	109 oz.
Gap Height	0.375", 9.5 mm
Voice Coil Diameter	4", 102 mm

MATERIALS OF CONSTRUCTION

Copper voice coil
Kapton former
Ferrite magnet
Extended core with Core Periphery Ventilation
Die-cast aluminum basket
Treated Paper-Kevlar
Cloth cone edge
Porous cloth top spider/ heatsink



THIELE & SMALL PARAMETERS


Fs	32 Hz
Re	5.07 Ω
Le	1.59 mH
Qms	10.15
Qes	0.49

Qts	0.47
Vas	11.71 cu.ft., 331.5 liters
Vd	1159 cc
Cms	0.18 mm/N
BL	17.2 T-M
Mms	143 grams
EBP	65
Xmax	10 mm
Sd	1159 cm2
Xlim	19.2 mm

MOUNTING INFORMATION

Recommended Enclosure Volume	104.8–172.7 liters,
Sealed	3.7–6.1 cu.ft.
Vented	118.9–303 liters,
	4.2–10.7 cu.ft.
Driver Volume Displaced	0.234 cu.ft., 6.62 liters
Overall Diameter	18", 457.2 mm
Baffle Hole Diameter	16.56", 420.6 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.28", 7.1 mm
Mounting Holes B.C.D.	17.25", 438.2 mm
Depth	8.15", 207 mm
Net Weight	27.4 lbs , 12.43 kg
Shipping Weight	30.9 lbs , 14.02 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

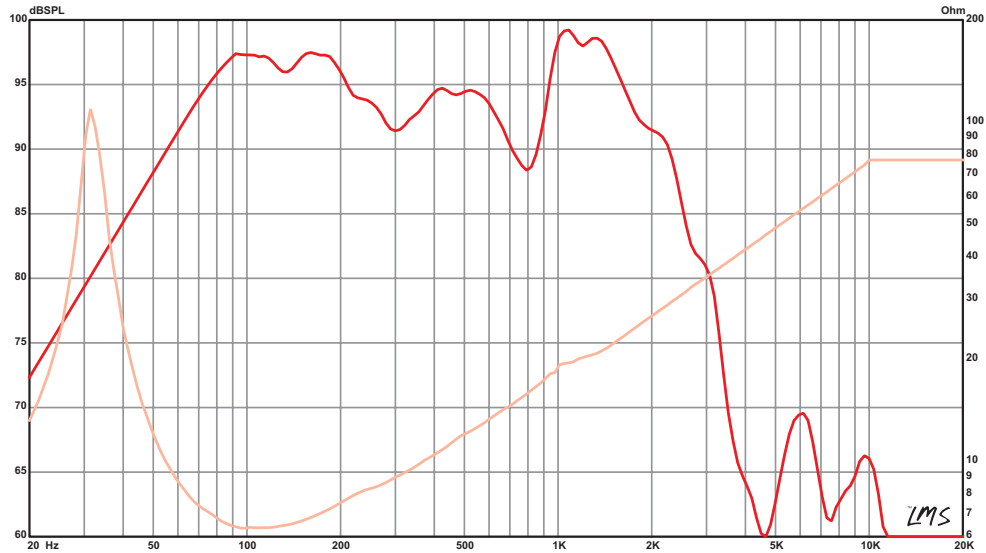

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

LIGHTEN UP



NEODYMIUM SERIES

Taking the weight out, leaving the performance in.

7
7 YEAR
WARRANTY*

Each of our Neodymium Professional series models is designed with a specific application in mind. And all are built with the needs of audio professionals at the forefront. Lighter weight is just one of the benefits of neodymium. From heavy-duty subwoofers, midranges and transducers in truncated frames for line arrays, punch, clarity and balance remain unmatched in these speakers.

Every Eminence speaker is backed by a seven-year warranty against manufacturer's defects*. With over 1,200 dealers and distributors worldwide, the sound you want is within reach.

*Warranty policy may vary outside of the continental United States and Canada. Check with your local distributor for warranty details.

NEODYMIUM SERIES

ALPHALITE™ 6A

Lightweight pro audio midbass driver.
For sealed, vented, or infinite baffle applications.

- 200 W Program Power
- 6.5” Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input checked="" type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	6.5", 165 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	200 W
Nominal Power	100 W
Resonance	126 Hz
Usable Frequency Range	100 Hz – 5.5 kHz
Sensitivity*	94 dB
Magnet Weight	4 oz.
Gap Height	0.25", 6.4 mm
Voice Coil Diameter	1.5", 38 mm

MATERIALS OF CONSTRUCTION

- Round copper voice coil
- Kapton former
- Neodymium magnet
- Vented and Extended core
- Pressed steel basket
- Paper cone
- Cloth cone edge
- Treated paper dust cap




THIELE & SMALL PARAMETERS

Fs	126 Hz
Re	7.3 Ω
Le	0.53 mH
Qms	6.51
Qes	0.61

MOUNTING INFORMATION

Recommended Enclosure Volume	2.83–566 liters,
Sealed	0.1–20 cu.ft.
Vented	3–16 liters,
0.1–0.6 cu.ft.	
Qts	0.56
Driver Volume Displaced	0.01 cu.ft., 0.27 liters
Vas	0.17 cu.ft., 4.92 liters
Overall Diameter	6.59", 167.4 mm
Vd	46 cc
Baffle Hole Diameter	5.69", 144.5 mm
Cms	0.21 mm/N
Front Sealing Gasket	Yes
BL	8.45 T-M
Rear Sealing Gasket	Yes
Mms	8 grams
Mounting Holes Diameter	0.23", 5.8 mm
EBP	205
Mounting Holes B.C.D.	6.06", 153.9 mm
Xmax	3.5 mm
Depth	2.4", 61 mm
Sd	129.9 cm2
Net Weight	2.2 lbs , 1 kg
Xlim	4 mm
Shipping Weight	2.9 lbs , 1.32 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

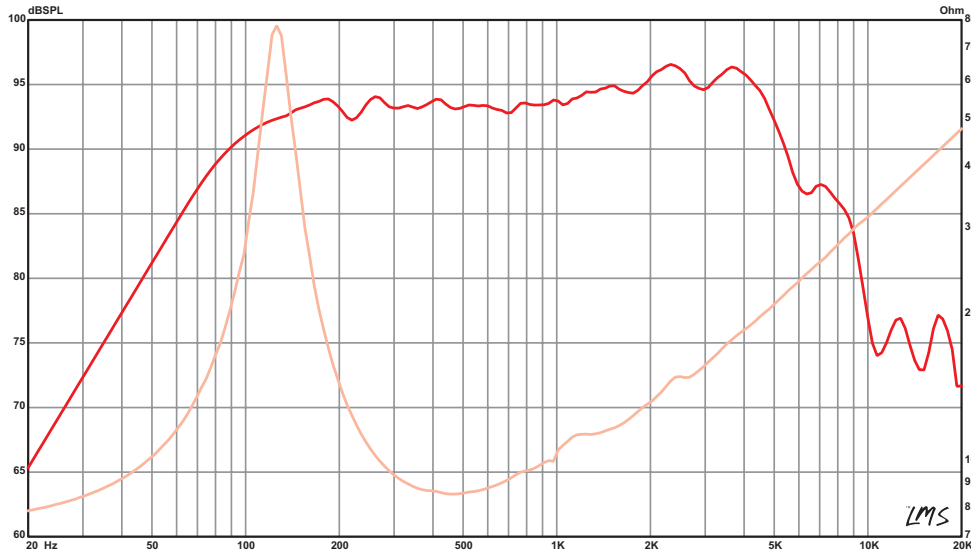

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

NEODYMIUM SERIES

DELTALITE® II 2510

Recommended for pro audio as a mid/hi or full-range and monitor. Also suited for bass guitar applications.

- 500 W Program Power
- 10” Nominal Diameter
- 8 or 4 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input checked="" type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	10", 254 mm
Nominal Impedance*	8 or 4 Ω
Power Rating*	
Program Power	500 W
Nominal Power	250 W
Resonance	53 Hz
Usable Frequency Range	60 Hz – 4 kHz
Sensitivity*	97.3 dB
Magnet Weight	7 oz.
Gap Height	0.275", 7 mm
Voice Coil Diameter	2.5", 64 mm

MATERIALS OF CONSTRUCTION

- Aluminum voice coil
- Polyimide former
- Neodymium magnet
- Vented core
- Die-cast aluminum basket/ heatsink
- Paper Cone
- Cloth cone edge
- Solid composition paper dust cap




THIELE & SMALL PARAMETERS

Fs	53 Hz
Re	5.06 Ω
Le	0.4 mH
Qms	5.76
Qes	0.45

MOUNTING INFORMATION

Recommended Enclosure Volume	12.7–17 liters,
Sealed	0.45–0.6 cu.ft.
Vented	17–39.6 liters,
0.6–1.4 cu.ft.	
Qts	0.42
Driver Volume Displaced	0.026 cu.ft., 0.74 liters
Vas	1.85 cu.ft., 52.5 liters
Overall Diameter	10.25", 260.4 mm
Vd	147 cc
Baffle Hole Diameter	9.15", 232.4 mm
Cms	0.3 mm/N
Front Sealing Gasket	Yes
BL	10.6 T-M
Rear Sealing Gasket	Yes
Mms	31 grams
Mounting Holes Diameter	0.28", 7.1 mm
EBP	117
Mounting Holes B.C.D.	9.73", 247.1 mm
Xmax	4.2 mm
Depth	4.9", 124.5 mm
Sd	350.1 cm2
Net Weight	4.6 lbs , 2.09 kg
Xlim	8 mm
Shipping Weight	5.7 lbs , 2.59 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

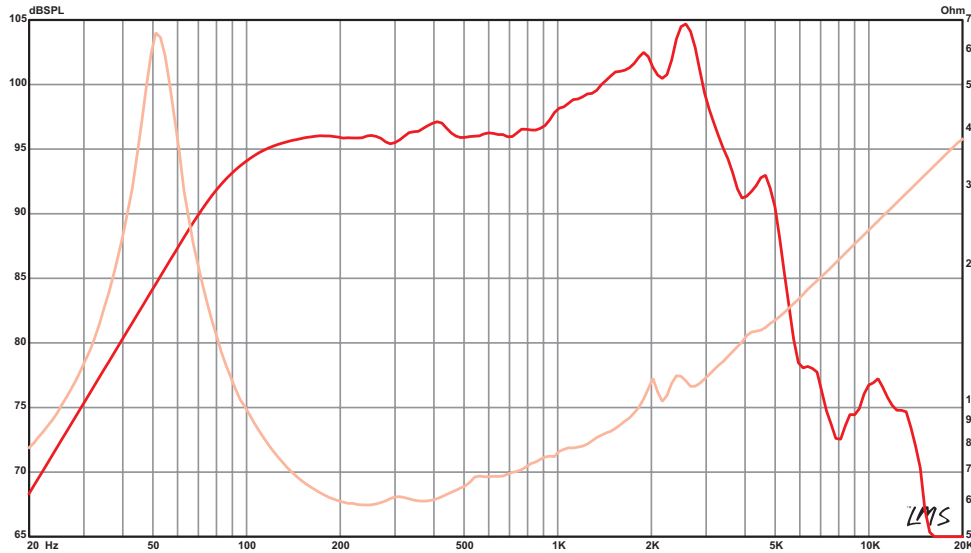

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

NEODYMIUM SERIES

DELTALITE® II 2512

Suited for pro audio as a mid/hi or full-range and monitor. Also recommended for bass guitar. Works well in sealed or vented enclosures.

- 500 W Program Power
- 12" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input checked="" type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	12", 305 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	500 W
Nominal Power	250 W
Resonance	44 Hz
Usable Frequency Range	58 Hz – 4.3 kHz
Sensitivity*	99.9 dB
Magnet Weight	7 oz.
Gap Height	0.275", 7 mm
Voice Coil Diameter	2.5", 64 mm

MATERIALS OF CONSTRUCTION

- Aluminum voice coil
- Polyimide former
- Neodymium magnet
- Vented core
- Die-cast aluminum basket/ heatsink
- Paper cone
- Cloth cone edge
- Solid composition paper dust cap




THIELE & SMALL PARAMETERS

Fs	44 Hz
Re	5.17 Ω
Le	0.43 mH
Qms	4.17
Qes	0.45

MOUNTING INFORMATION

Recommended Enclosure Volume	25.49–42.48 liters,
Sealed	0.9–1.5 cu.ft.
Vented	32.56–127.43 liters,
	1.15–4.5 cu.ft.
Qts	0.41
Driver Volume Displaced	0.05 cu.ft., 1.42 liters
Vas	4.76 cu.ft., 134.88 liters
Overall Diameter	12.38", 314.5 mm
Vd	255 cc
Baffle Hole Diameter	11.06", 280.9 mm
Cms	0.36 mm/N
Front Sealing Gasket	Yes
BL	10.69 T-M
Rear Sealing Gasket	Yes
Mms	37 grams
Mounting Holes Diameter	0.28", 7.1 mm
EBP	96
Mounting Holes B.C.D.	11.62", 295.2 mm
Xmax	4.9 mm
Depth	6.06", 153.9 mm
Sd	519.5 cm2
Net Weight	5.1 lbs , 2.31 kg
Xlim	8.5 mm
Shipping Weight	6.8 lbs , 3.08 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

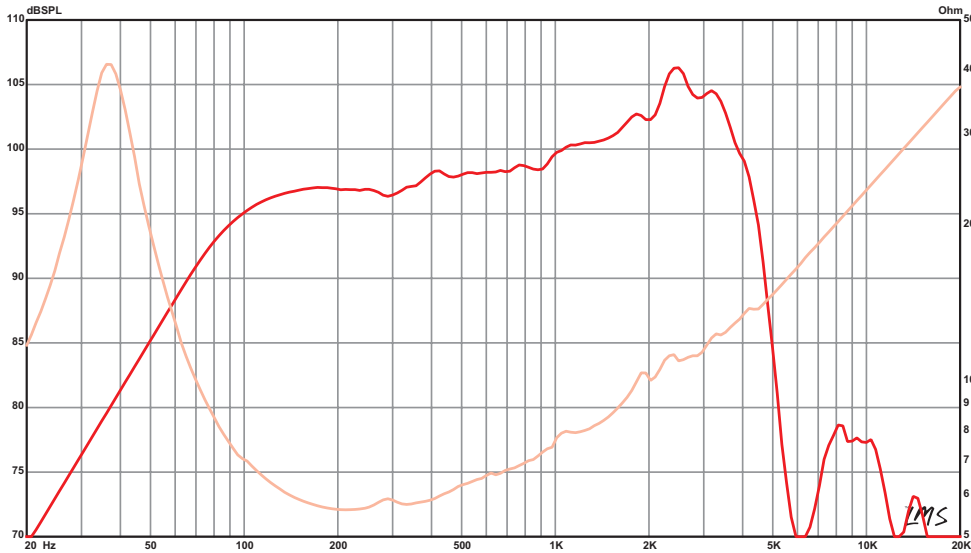

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

NEODYMIUM SERIES

KAPPALITE™ 3012H0

Recommended as a woofer, midbass or midrange in sealed and vented enclosures. A popular choice for 12" line arrays and bass guitar applications.

- 800 W Program Power
- 12" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input checked="" type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input checked="" type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	12", 305 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	800 W
Nominal Power	400 W
Resonance	52 Hz
Usable Frequency Range	51 Hz – 3.5 kHz
Sensitivity*	100.5 dB
Magnet Weight	11 oz.
Gap Height	0.365", 9.3 mm
Voice Coil Diameter	3", 76 mm

MATERIALS OF CONSTRUCTION

- Aluminum voice coil
- Kapton former
- Neodymium magnet
- Vented core
- Die-cast aluminum basket
- Treated paper cone
- Sealed cloth surround
- Treated paper dust cap




THIELE & SMALL PARAMETERS

Fs	52 Hz
Re	5.5 Ω
Le	0.57 mH
Qms	8.39
Qes	0.33

MOUNTING INFORMATION

Recommended Enclosure Volume	28–76 liters,
Sealed	1–2.7 cu.ft.
Vented	41–110 liters,
	1.5–3.9 cu.ft.
Qts	0.32
Driver Volume Displaced	0.054 cu.ft., 1.53 liters
Vas	2.86 cu.ft., 81.1 liters
Overall Diameter	12.38", 314.5 mm
Vd	330 cc
Baffle Hole Diameter	11.06", 280.9 mm
Cms	0.2 mm/N
Front Sealing Gasket	Yes
BL	15.9 T-M
Rear Sealing Gasket	Yes
Mms	47 grams
Mounting Holes Diameter	0.28", 7.1 mm
EBP	157
Mounting Holes B.C.D.	11.62", 295.2 mm
Xmax	6.2 mm
Depth	5.63", 143 mm
Sd	532.4 cm2
Net Weight	7.1 lbs , 3.22 kg
Xlim	12.5 mm
Shipping Weight	8.7 lbs , 3.95 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

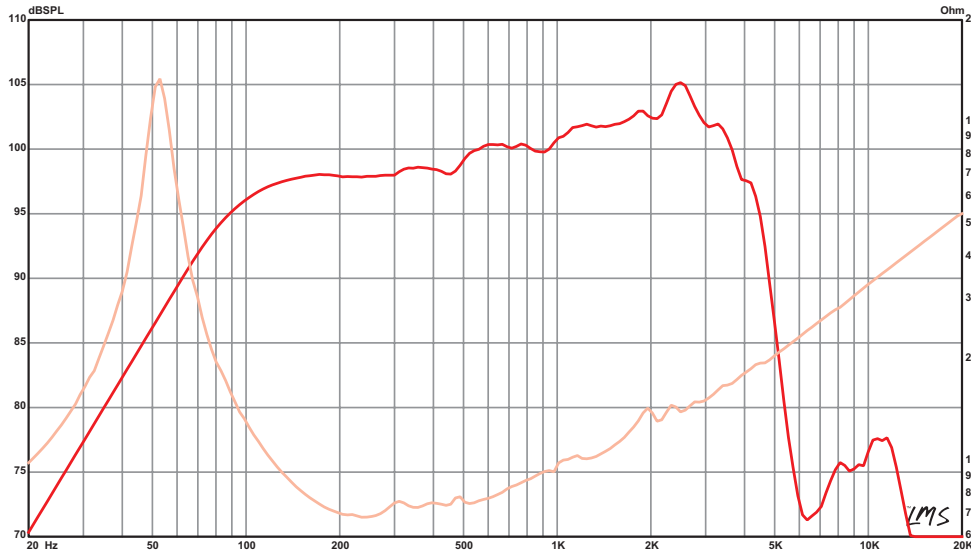

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

NEODYMIUM SERIES

KAPPALITE™ 3012LF

Recommended for pro audio and bass in vented enclosures.

- 900 W Program Power
- 12" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input checked="" type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input checked="" type="checkbox"/>		



SPECIFICATION


Nominal Basket Diameter	12", 305 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	900 W
Nominal Power	450 W
Resonance	37 Hz
Usable Frequency Range	46 Hz – 2 kHz
Sensitivity*	95.5 dB
Magnet Weight	11 oz.
Gap Height	0.365", 9.3 mm
Voice Coil Diameter	3", 76 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Kapton former
- Neodymium magnet
- Vented core
- Die-cast aluminum basket
- Treated paper cone
- Sealed cloth Edge
- Treated paper dust cap



FREQUENCY RESPONSE & IMPEDANCE CURVE*

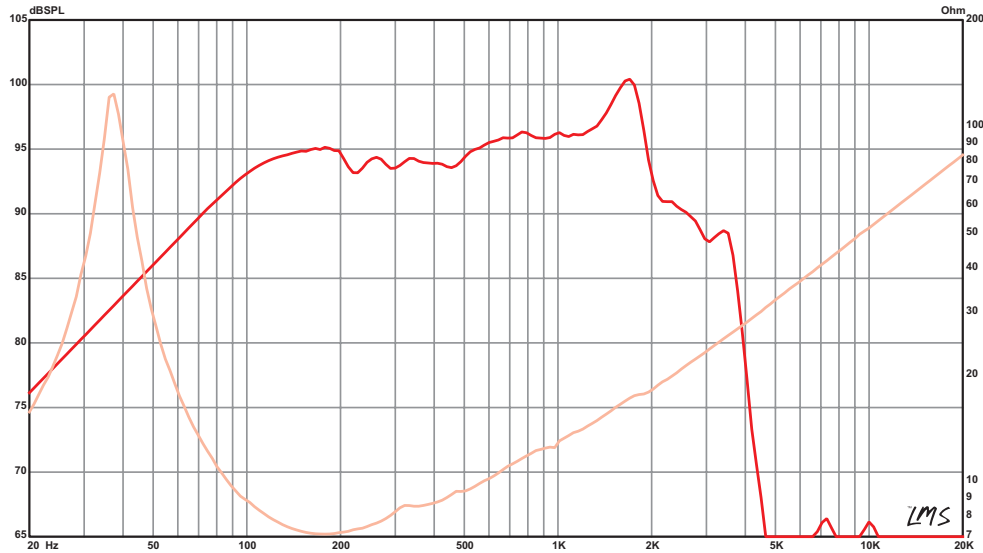

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

NEODYMIUM SERIES

DELTALITE® II 2515

Recommended for pro audio as a mid/hi or full-range and monitor. Also suited for bass guitar. Works well in sealed or vented enclosures.

- 600 W Program Power
- 15" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		<input checked="" type="checkbox"/>



SPECIFICATION


Nominal Basket Diameter	15", 381 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	600 W
Nominal Power	300 W
Resonance	42 Hz
Usable Frequency Range	54 Hz – 3.7 kHz
Sensitivity*	99.2 dB
Magnet Weight	7 oz.
Gap Height	0.275", 7 mm
Voice Coil Diameter	2.5", 64 mm

MATERIALS OF CONSTRUCTION

- Aluminum voice coil
- Polyimide former
- Neodymium magnet
- Vented core
- Die-cast aluminum basket/ heatsink
- Paper cone
- Cloth cone edge
- Solid composition paper dust cap



FREQUENCY RESPONSE & IMPEDANCE CURVE*

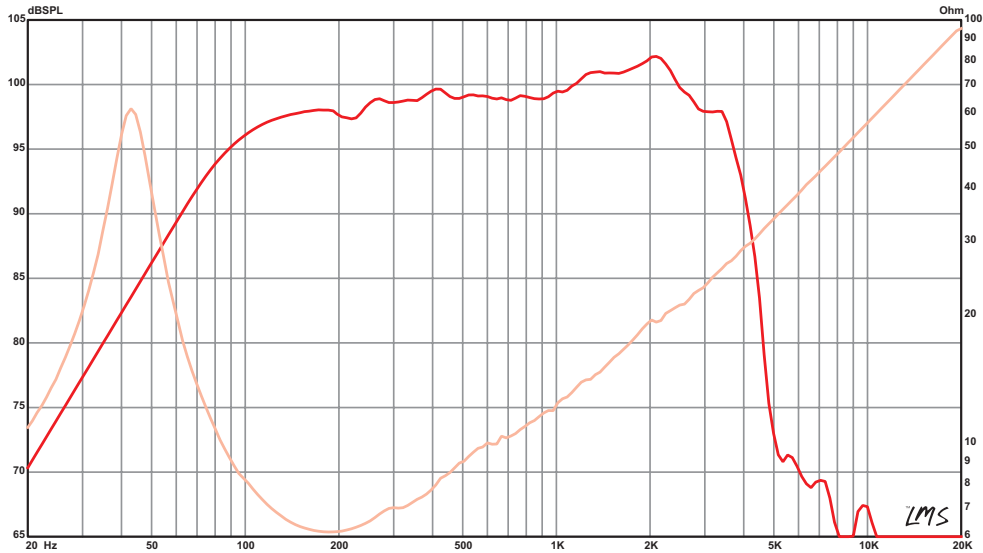

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

NEODYMIUM SERIES

KAPPALITE™ 3015

Recommended for vented professional audio enclosures for full-range or as mids. Also suitable for bass guitar.

- 900 W Program Power
- 15" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input checked="" type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	15", 381 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	900 W
Nominal Power	450 W
Resonance	45 Hz
Usable Frequency Range	40 Hz – 4 kHz
Sensitivity*	100.8 dB
Magnet Weight	11 oz.
Gap Height	0.365", 9.3 mm
Voice Coil Diameter	3", 76 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Polyimide former
- Neodymium magnet
- Vented core
- Die-cast aluminum basket/ heatsink
- Paper cone
- Cloth cone edge
- Solid composition paper dust cap




THIELE & SMALL PARAMETERS

Fs	45 Hz
Re	5.27 Ω
Le	0.64 mH
Qms	6.7
Qes	0.36

MOUNTING INFORMATION

Recommended Enclosure Volume	N/A
Sealed	
Vented	51–144 liters, 1.8–5.1 cu.ft.
Qts	0.34
Driver Volume Displaced	0.09 cu.ft., 2.54 liters
Vas	5.4 cu.ft., 153 liters
Overall Diameter	15.32", 389.1 mm
Vd	505 cc
Baffle Hole Diameter	14", 355.6 mm
Cms	0.15 mm/N
Front Sealing Gasket	Yes
BL	18.6 T-M
Rear Sealing Gasket	Yes
Mms	84 grams
Mounting Holes Diameter	0.28", 7.1 mm
EBP	125
Mounting Holes B.C.D.	14.56", 369.8 mm
Xmax	5.9 mm
Depth	6.8", 172.7 mm
Sd	856 cm2
Net Weight	7.9 lbs , 3.58 kg
Xlim	11 mm
Shipping Weight	10.1 lbs , 4.58 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

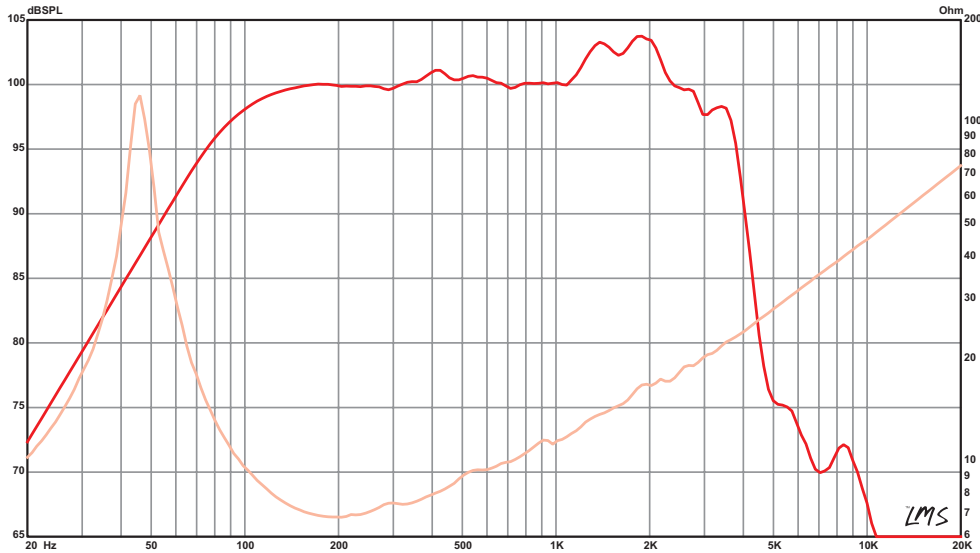

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

NEODYMIUM SERIES

KAPPALITE™ 3015LF

Recommended for professional audio and bass in vented enclosures.

- 900 W Program Power
- 15" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input type="checkbox"/>
Midbass	<input type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input checked="" type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input checked="" type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	15", 381 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	900 W
Nominal Power	450 W
Resonance	44 Hz
Usable Frequency Range	40 Hz – 1.5 kHz
Sensitivity*	98.4 dB
Magnet Weight	11 oz.
Gap Height	0.365", 9.3 mm
Voice Coil Diameter	3", 76 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Kapton former
- Neodymium magnet
- Vented core
- Die-cast aluminum basket/heatsink
- Treated paper cone
- Cloth cone edge
- Treated paper dust cap




THIELE & SMALL PARAMETERS

Fs	44 Hz
Re	5.5 Ω
Le	0.93 mH
Qms	8.97
Qes	0.48

MOUNTING INFORMATION

Recommended Enclosure Volume	N/A
Sealed	
Vented	99–195 liters, 3.5–6.9 cu.ft.
Qts	0.46
Driver Volume Displaced	0.09 cu.ft., 2.56 liters
Vas	5.33 cu.ft., 150.9 liters
Overall Diameter	15.32", 389.1 mm
Vd	846 cc
Baffle Hole Diameter	14.03", 356.4 mm
Cms	0.14 mm/N
Front Sealing Gasket	Yes
BL	17 T-M
Rear Sealing Gasket	Yes
Mms	93 grams
Mounting Holes Diameter	0.28", 7.1 mm
EBP	90
Mounting Holes B.C.D.	14.56", 369.8 mm
Xmax	9.6 mm
Depth	7.25", 184.2 mm
Sd	881.1 cm2
Net Weight	8.6 lbs , 3.9 kg
Xlim	17 mm
Shipping Weight	10.7 lbs , 4.85 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

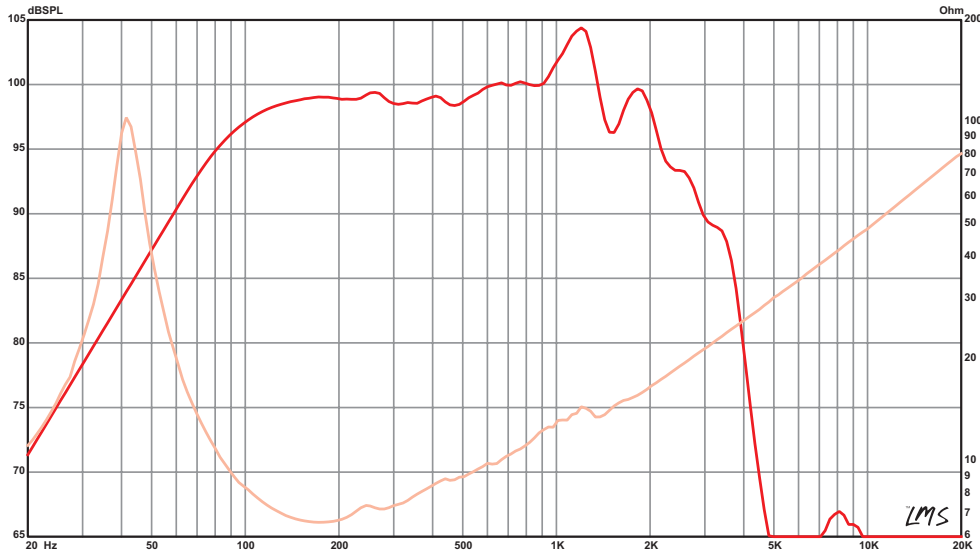

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

AMERICAN STANDARD SERIES

Offering unmatched quality and value.

7
7 YEAR
WARRANTY*

Each Eminence American Standard model can be identified by its economical stamped steel chassis. Although more affordable than cast aluminum, these frames provide an excellent and versatile chassis. We coat the basket and all metal parts with an epoxy-acrylic finish. Our in-house e-coat process lets us control the thickness of that coating to within 0.001". That's the diameter of a human hair and it's critical when working with close tolerance transducer motor designs. We then add front and rear sealing gaskets on each model to allow front or rear loading.

And like our Professional series, every speaker is designed and assembled by hand, and is backed by a seven-year warranty against manufacturer's defects*.

Eminence offers 2" to 15" models with applications ranging from standard subwoofers, two-way enclosures, and coaxials, to truncated line array models, monitor woofers, and high performance midranges setting records for output in car audio.



AMERICAN STANDARD SERIES

ALPHA 2-8

Ideal for tight fitting column and line array applications, the Alpha 2 features a 0.64" copper voice coil and 2.7 oz. ferrite magnet. With under spider venting and a flux source cap, this 8 ohm driver lets the heat out while containing the magnetic flux, which is critical for multi-unit designs packed tightly together. Rated at 30 watts program power, the Alpha 2 has a wide usable frequency range of 200 Hz – 20 kHz.

- 30 W Program Power
- 2" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Full range	<input checked="" type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midrange	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Midbass	<input type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Woofers	<input type="checkbox"/>	Horn Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	2.0", 50.8 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	30 W
Nominal Power	20 W
Resonance	185 Hz
Usable Frequency Range	200 Hz – 20.0 kHz
Sensitivity*	83.8 dB
Magnet Weight	2.7 oz.
Gap Height	0.12", 3 mm
Voice Coil Diameter	0.64", 16.2 mm

MATERIALS OF CONSTRUCTION

Copper voice coil
Polyimide former
Ferrite magnet
Under Spider Venting
Pressed steel basket
Paper/Poly sandwich cone
Cloth cone edge
Poly dust cap



THIELE & SMALL PARAMETERS


Fs	185 Hz
Re	6.4 Ω
Le	0.13 mH
Qms	3.06
Qes	0.94

Qts	0.72
Vas	0.01 cu.ft., 0.18 liters
Vd	2.10 cc
Cms	0.84 mm/N
BL	2.64 T-M
Mms	0.88 grams
EBP	197.8
Xmax	1.7 mm
Sd	12.37 cm ²
Xlim	2.2 mm

MOUNTING INFORMATION

Recommended Enclosure Volume	
Sealed	0.42–0.54 liters, 0.015–0.019 cu.ft.
Vented	0.37–0.57 liters, 0.013–0.02 cu.ft.
Driver Volume Displaced	2.0 cu.in., 0.03 liters
Major Diameter	2.75", 69.9 mm
Flat to Flat Diameter	2.13", 54 mm
Baffle Hole Diameter	2.0", 50.8 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	No
Mounting Holes Diameter	0.15", 3.8 mm
Mounting Holes B.C.D.	2.363", 59.9 mm
Depth	1.63", 41.4 mm
Net Weight	0.40 lbs , 0.18 kg
Shipping Weight	(Sold in 4-packs) 2 lbs , 0.91 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

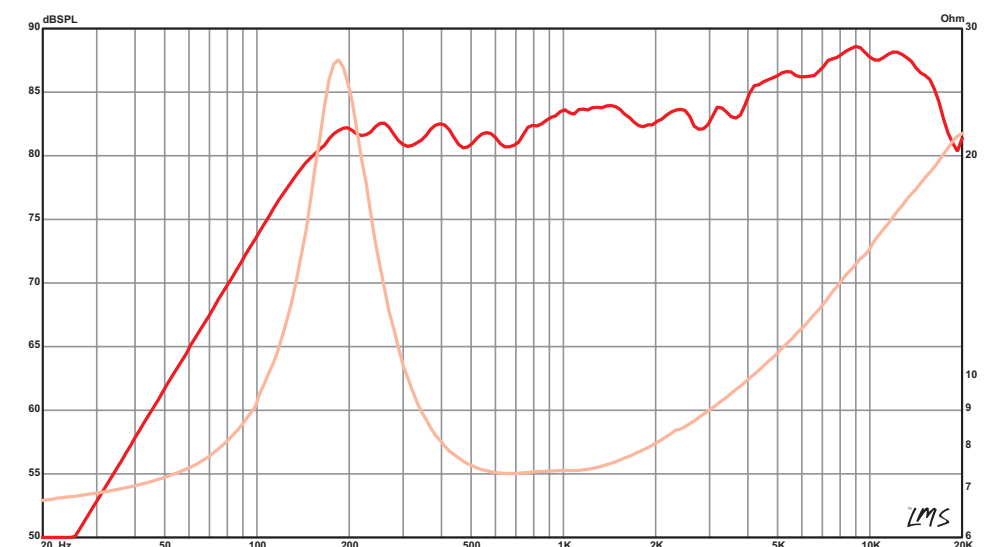

No other loudspeaker line provides more choices, power handling, performance, and reliability for the price.

*Warranty policy may vary outside of the continental United States and Canada. Check with your local distributor for warranty details.

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

VISIT [EMINENCE.COM](https://www.eminence.com) TO FIND A DEALER NEAR YOU.

AMERICAN STANDARD SERIES

ALPHA 3-8

The Eminence Alpha 3-8 is a truly versatile compact full-range driver perfectly suited for tight fitting pro audio line array and column array applications. With a program power rating of 60 watts, this 3” driver utilizes an 8.3 oz ferrite magnet in conjunction with an internal neodymium bucking magnet for increased sensitivity and extends the response out to 20kHz. The highly pressed cone sandwiches paper with a layer of water-resistant polypropylene for increased stiffness and lower distortion.

- 60 W Program Power
- 3.0” Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Full range	<input checked="" type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midrange	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Midbass	<input type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Woofer	<input type="checkbox"/>	Horn Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	3.0”, 76 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	60 W
Nominal Power	30 W
Resonance	118 Hz
Usable Frequency Range	150 Hz – 20.0 kHz
Sensitivity*	88.6 dB
Magnet Weight	8 oz.
Gap Height	0.10”, 2.5 mm
Voice Coil Diameter	0.787”, 20 mm

MATERIALS OF CONSTRUCTION

Copper voice coil
Polyimide former
Ferrite magnet
Vented / Flux source cap
Pressed steel basket
Paper/Poly sandwich cone
Poly cone edge
Poly dust cap



THIELE & SMALL PARAMETERS


Fs	118 Hz
Re	5.12 Ω
Le	0.11 mH
Qms	7.94
Qes	0.53

Qts	0.50
Vas	0.03 cu.ft., 0.95 liters
Vd	6.9 cc
Cms	0.84 mm/N
BL	3.93 T-M
Mms	2 grams
EBP	220
Xmax	2.40 mm
Sd	28.6 cm2
Xlim	4.0 mm

MOUNTING INFORMATION

Recommended Enclosure Volume	0.85–1.42 liters,
Sealed	0.03–0.05 cu.ft.
Vented	1.42–1.98 liters,
	0.05–0.07 cu.ft.
Driver Volume Displaced	0.005 cu.ft., 0.13 liters
Major Diameter	3.98”, 101.1 mm
Flat to Flat Diameter	3.24”, 82.3 mm
Baffle Hole Diameter	3.04”, 77.2 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.16”, 4.1 mm
Mounting Holes B.C.D.	3.63”, 92.1 mm
Depth	1.76”, 44.6 mm
Net Weight	0.90 lbs , 0.41 kg
Shipping Weight	1.10 lbs , 0.50 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

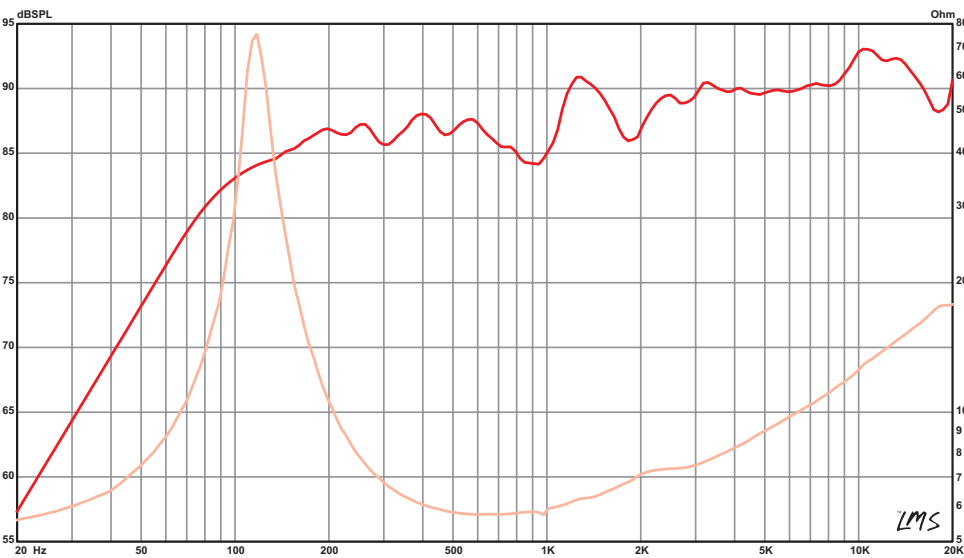

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

AMERICAN STANDARD SERIES

ALPHA 4

Perfectly suited for line array, car doors or side panels, and other tight fitting applications, the Alpha 4 is a very versatile 110 watt driver that can be used full range, as a midbass, or as a midrange. They can be stacked by themselves in a column for vocal applications, or in conjunction with a tweeter and a sub for compact, high performance PA or MI applications.

- 110 W Program Power
- 4” Nominal Diameter
- 4 or 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input checked="" type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	4”, 102 mm
Nominal Impedance*	4 or 8 Ω
Power Rating*	
Program Power	110 W
Nominal Power	55 W
Resonance	120 Hz
Usable Frequency Range	105 Hz – 10 kHz
Sensitivity*	88 dB
Magnet Weight	10 oz.
Gap Height	0.14”, 3.7 mm
Voice Coil Diameter	1”, 25 mm

MATERIALS OF CONSTRUCTION

Copper voice coil
Polyimide former
Ferrite magnet
Non-Vented core
Pressed steel basket
Paper cone
Cloth cone edge
Solid composition paper dust cap



THIELE & SMALL PARAMETERS


Fs	120 Hz
Re	3.42 Ω
Le	0.18 mH
Qms	6.41
Qes	0.7

Qts	0.63
Vas	0.06 cu.ft., 1.76 liters
Vd	15 cc
Cms	0.38 mm/N
BL	4.12 T-M
Mms	5 grams
EBP	172
Xmax	2.6 mm
Sd	57.7 cm2
Xlim	4.5 mm

MOUNTING INFORMATION

Recommended Enclosure Volume	1.84–4.53 liters,
Sealed	0.07–0.16 cu.ft.
Vented	3.96–7.08 liters,
	0.14–0.25 cu.ft.
Driver Volume Displaced	0.012 cu.ft., 0.33 liters
Overall Diameter	4.57”, 116.1 mm
Baffle Hole Diameter	3.77”, 95.8 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.15”, 3.8 mm
Mounting Holes B.C.D.	4.25”, 108 mm
Depth	2.31”, 58.7 mm
Net Weight	1.5 lbs , 0.68 kg
Shipping Weight	1.9 lbs , 0.86 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

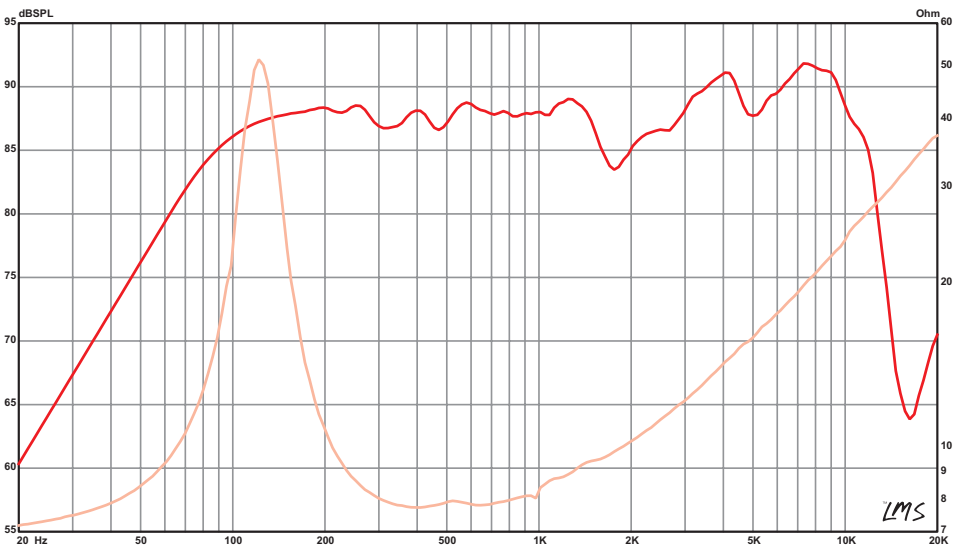

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

AMERICAN STANDARD SERIES

ALPHA-5

The Alpha 5 offers unmistakable performance with an emphasis on value. Rated at 250 watts program power, this 5” midbass features a water-resistant cone and dust cap, making it an excellent choice for line array or column array applications.

- 250 W Program Power
- 5” Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	✓	Sealed Box	✓
Midbass	✓	Vented Box	✓
Woofer	□	Scoop Loading	□
Subwoofer	□	Horn Loading	✓
Bass Guitar	□		

SPECIFICATION

Nominal Basket Diameter	5", 127 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	250 W
Nominal Power	125 W
Resonance	87 Hz
Usable Frequency Range	87 Hz – 3.5 kHz
Sensitivity*	89.4 dB
Magnet Weight	20 oz.
Gap Height	0.23", 5.84 mm
Voice Coil Diameter	1.5", 38 mm

MATERIALS OF CONSTRUCTION

- Aluminum voice coil
- Polyimide former
- Ferrite magnet
- Vented core
- Pressed steel basket
- Water resistant cone pulp
- Cloth cone edge
- Water resistant paper dust cap




THIELE & SMALL PARAMETERS

Fs	87 Hz
Re	5.0 Ω
Le	0.29 mH
Qms	11.81
Qes	0.56

MOUNTING INFORMATION

Recommended Enclosure Volume	3.4–7.93 liters,
Sealed	0.12–0.28 cu.ft.
Vented	6.8–14.16 liters,
	0.24–0.5 cu.ft.
Qts	0.54
Driver Volume Displaced	0.018 cu.ft., 0.51 liters
Vas	0.22 cu.ft., 6.14 liters
Major Diameter	5.87", 149.1 mm
Vd	60.75 cc
Flat to Flat Diameter	5.27", 133.86 mm
Cms	0.42 mm/N
Baffle Hole Diameter	4.80", 121.92 mm
BL	6.22 T-M
Front Sealing Gasket	Yes
Mms	7.96 grams
Rear Sealing Gasket	Yes
EBP	154.56
Mounting Holes Diameter	0.197", 5.0 mm
Xmax	5.92 mm
Mounting Holes B.C.D.	5.39", 136.9 mm
Sd	102.61 cm2
Depth	2.91", 73.9 mm
Net Weight	3.1 lbs , 1.41 kg
Xlim	6.4 mm
Shipping Weight	3.5 lbs , 1.59 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

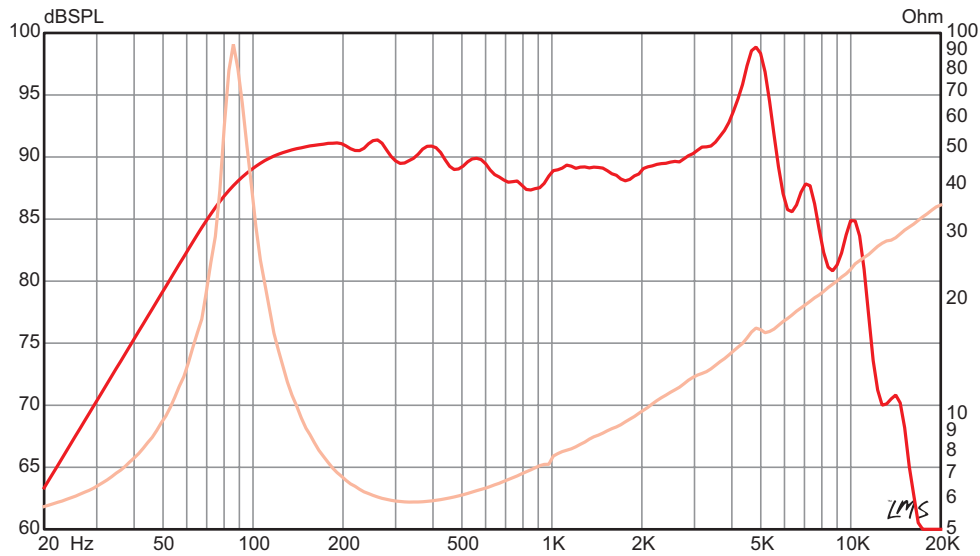

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

AMERICAN STANDARD SERIES

ALPHA-6A

Very versatile and great sounding pro audio midrange in a sealed cabinet, or as a midbass in a vented satellite enclosure. A popular choice for car audio applications.

- 200 W Program Power
- 6.5” Nominal Diameter
- 8 or 4 Ω

APPLICATION		ENCLOSURE	
Midrange	✓	Sealed Box	✓
Midbass	✓	Vented Box	✓
Woofer	□	Scoop Loading	□
Subwoofer	□	Horn Loading	✓
Bass Guitar	□		

SPECIFICATION

Nominal Basket Diameter	6.5", 165 mm
Nominal Impedance*	8 or 4 Ω
Power Rating*	
Program Power	200 W
Nominal Power	100 W
Resonance	103 Hz
Usable Frequency Range	95 Hz – 6 kHz
Sensitivity*	93.6 dB
Magnet Weight	20 oz.
Gap Height	0.25", 6.4 mm
Voice Coil Diameter	1.5", 38 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Polyimide former
- Ferrite magnet
- Vented and extended core
- Pressed steel basket
- Paper cone
- Cloth cone edge
- Solid composition paper dust cap




THIELE & SMALL PARAMETERS

Fs	103 Hz
Re	7.2 Ω
Le	0.19 mH
Qms	5.68
Qes	0.6

MOUNTING INFORMATION

Recommended Enclosure Volume	2.8–5.7 liters,
Sealed	0.1–0.2 cu.ft.
Vented	3.4–15.6 liters,
	0.12–0.55 cu.ft.
Qts	0.54
Driver Volume Displaced	0.014 cu.ft., 0.41 liters
Vas	0.2 cu.ft., 5.8 liters
Overall Diameter	6.59", 167.4 mm
Vd	44 cc
Baffle Hole Diameter	5.65", 143.5 mm
Cms	0.26 mm/N
Front Sealing Gasket	Yes
BL	8 T-M
Rear Sealing Gasket	Yes
Mms	7 grams
Mounting Holes Diameter	0.23", 5.8 mm
EBP	159
Mounting Holes B.C.D.	6.06", 153.9 mm
Xmax	3.5 mm
Depth	2.8", 71.1 mm
Sd	126.7 cm2
Net Weight	4.1 lbs , 1.86 kg
Xlim	4 mm
Shipping Weight	4.8 lbs , 2.18 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

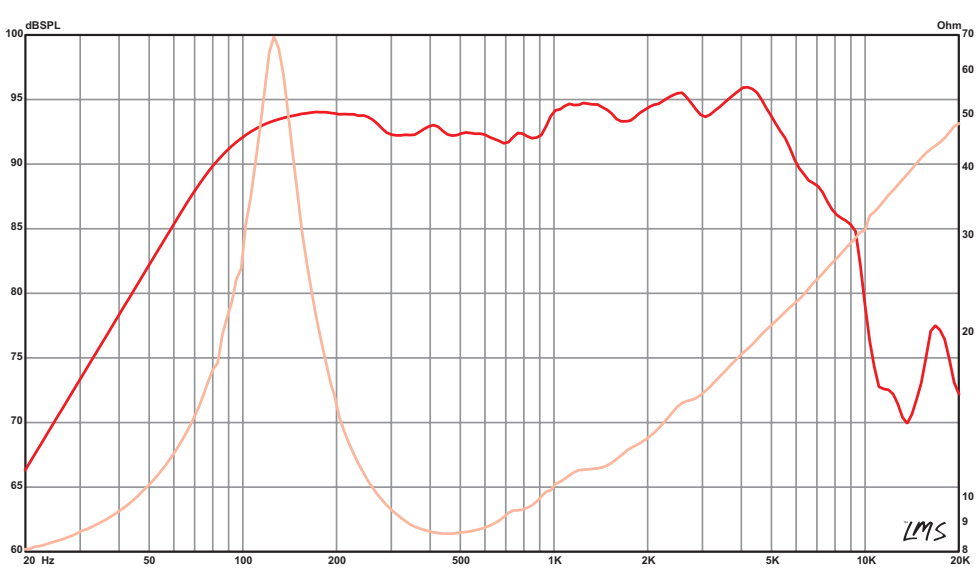

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

AMERICAN STANDARD SERIES

ALPHA-6CBMRA

Recommended for pro audio, car audio, and bass guitar midrange applications. Sealed basket affords this speaker enclosure independence.

- 200 W Program Power
- 6.5" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input checked="" type="checkbox"/>	Sealed Box	<input type="checkbox"/>
Midbass	<input type="checkbox"/>	Vented Box	<input type="checkbox"/>
Woofer	<input type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	6.5", 165 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	200 W
Nominal Power	100 W
Resonance	407 Hz
Usable Frequency Range	400 Hz – 5 kHz
Sensitivity*	97.8 dB
Magnet Weight	16 oz.
Gap Height	0.25", 6.4 mm
Voice Coil Diameter	1.5", 38 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Polyimide former
- Ferrite magnet
- Non-vented core
- Pressed steel basket
- Paper cone
- Cloth cone edge
- Solid composition paper dust cap




THIELE & SMALL PARAMETERS

Fs	407 Hz
Re	5.26 Ω
Le	0.38 mH
Qms	6.04
Qes	1.74

MOUNTING INFORMATION

Recommended Enclosure Volume	N/A
Sealed	
Vented	N/A
Qts	1.35
Driver Volume Displaced	0.014 cu.ft., 0.4 liters
Vas	0.02 cu.ft., 0.45 liters
Overall Diameter	6.59", 167.4 mm
Vd	19 cc
Baffle Hole Diameter	5.69", 144.5 mm
Cms	0.02 mm/N
Front Sealing Gasket	Yes
BL	7.86 T-M
Rear Sealing Gasket	Yes
Mms	8 grams
Mounting Holes Diameter	0.23", 5.8 mm
EBP	234
Mounting Holes B.C.D.	6.06", 153.9 mm
Xmax	1.5 mm
Depth	2.2", 55.9 mm
Sd	126.7 cm2
Net Weight	3.7 lbs , 1.68 kg
Xlim	3 mm
Shipping Weight	4.4 lbs , 2 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

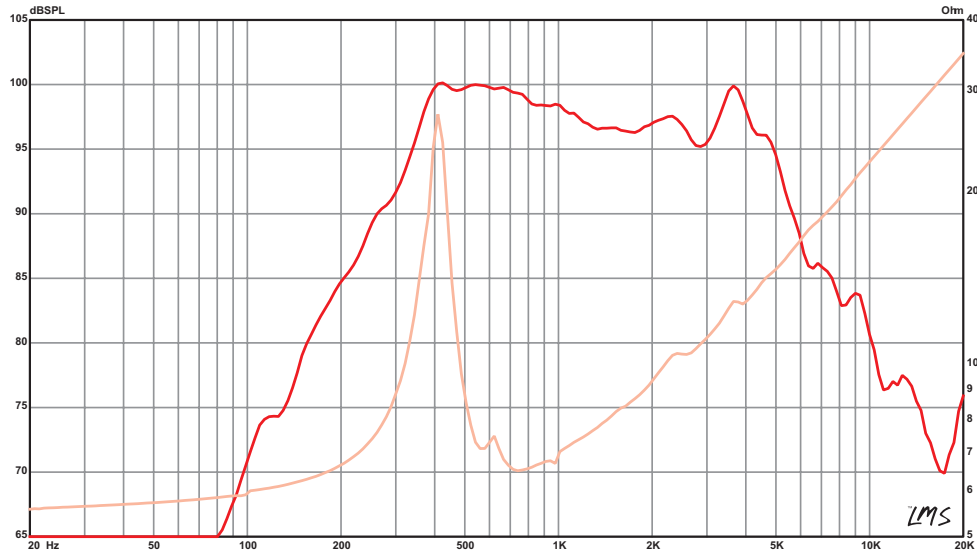

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

AMERICAN STANDARD SERIES

LA6-CBMR

Recommended for pro audio midrange applications from 500Hz-3kHz. Features a closed truncated basket for close spacing in line-arrays. Use it in a two-way box for better bass tone.

- 300 W Program Power
- 6.5" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input checked="" type="checkbox"/>	Sealed Box	<input type="checkbox"/>
Midbass	<input type="checkbox"/>	Vented Box	<input type="checkbox"/>
Woofer	<input type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	6.5", 165 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	300 W
Nominal Power	150 W
Resonance	460 Hz
Usable Frequency Range	500 Hz – 5.4 kHz
Sensitivity*	97.8 dB
Magnet Weight	38 oz.
Gap Height	0.31", 7.9 mm
Voice Coil Diameter	1.5", 38 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Polyimide former
- Ferrite magnet
- Vented and extended core
- Pressed steel basket with truncated sides
- Paper cone
- Cloth cone edge
- Solid composition paper dust cap




THIELE & SMALL PARAMETERS

Fs	460 Hz
Re	6.3 Ω
Le	0.33 mH
Qms	3.13
Qes	1.24

MOUNTING INFORMATION

Recommended Enclosure Volume	N/A
Sealed	
Vented	N/A
Qts	0.89
Driver Volume Displaced	0.022 cu.ft., 0.62 liters
Vas	0.01 cu.ft., 0.4 liters
Overall Diameter	6.59", 167.4 mm
Vd	2.7 cc
Baffle Hole Diameter	6.0", 152.4 mm
Cms	0.01 mm/N
Front Sealing Gasket	5.65", 143.5 mm
BL	11.1 T-M
Rear Sealing Gasket	Yes
Mms	9 grams
Mounting Holes Diameter	N/A
EBP	371
Mounting Holes B.C.D.	0.23", 5.8 mm
Xmax	0.2 mm
Depth	6.06", 153.9 mm
Sd	133.1 cm2
Net Weight	2.77", 70.4 mm
Xlim	0.8 mm
Shipping Weight	6.7 lbs , 3.04 kg
	7.2 lbs , 3.27 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

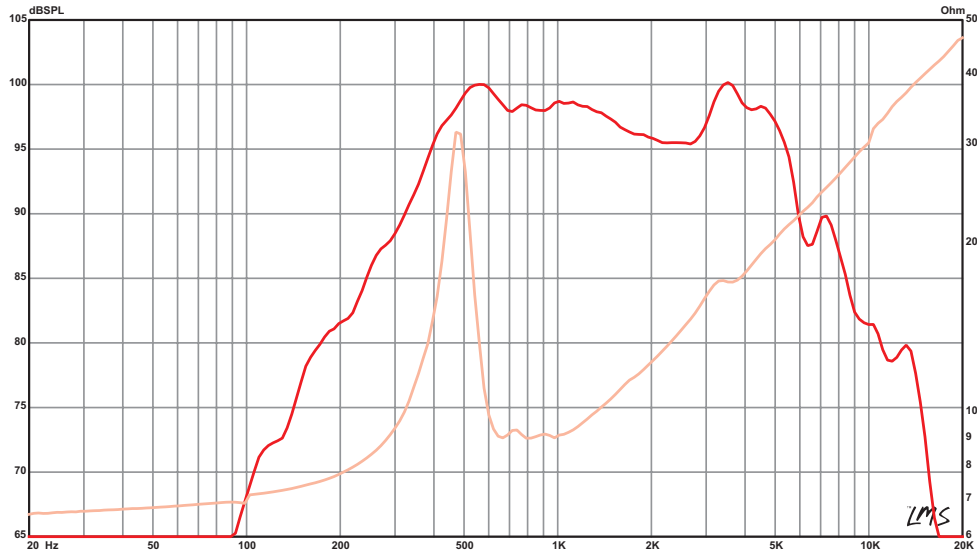

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

AMERICAN STANDARD SERIES

BETA-6A

High power 6.5 inch midbass driver for use in concert sound systems or in high power auto sound as a midbass or a midrange driver. Works well in tiny sealed or vented enclosures, and in infinite baffles too.

- 350 W Program Power
- 6.5" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input checked="" type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	6.5", 165 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	350 W
Nominal Power	175 W
Resonance	123 Hz
Usable Frequency Range	95 Hz – 4 kHz
Sensitivity*	94 dB
Magnet Weight	30 oz.
Gap Height	0.25", 6.4 mm
Voice Coil Diameter	2", 51 mm

MATERIALS OF CONSTRUCTION

- Aluminum voice coil
- Polyimide former
- Ferrite magnet
- Vented and extended core
- Pressed steel basket
- Water resistant paper cone
- Treated cloth cone edge
- Water resistant treated paper dust cap




THIELE & SMALL PARAMETERS

Fs	123 Hz
Re	5.18 Ω
Le	0.43 mH
Qms	3.46
Qes	0.66

MOUNTING INFORMATION

Recommended Enclosure Volume	2.38–9999.99 liters, 0.08–9999.99 cu.ft.
Sealed	
Vented	5.1–14.16 liters, 0.18–0.5 cu.ft.
Qts	0.56
Driver Volume Displaced	0.021 cu.ft., 0.6 liters
Vas	0.12 cu.ft., 3.51 liters
Overall Diameter	6.59", 167.4 mm
Vd	61.1 cc
Baffle Hole Diameter	5.65", 143.5 mm
Cms	0.15 mm/N
Front Sealing Gasket	Yes
BL	8.13 T-M
Rear Sealing Gasket	Yes
Mms	11 grams
Mounting Holes Diameter	0.23", 5.8 mm
EBP	185
Mounting Holes B.C.D.	6.06", 153.9 mm
Xmax	4.5 mm
Depth	2.66", 67.6 mm
Sd	129.9 cm2
Net Weight	5.6 lbs , 2.54 kg
Xlim	5.7 mm
Shipping Weight	6.3 lbs , 2.86 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

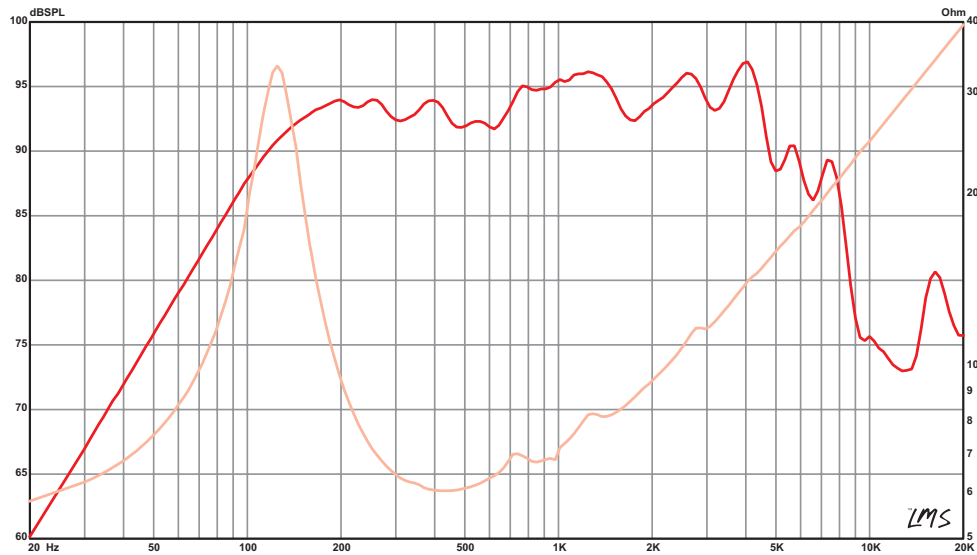

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

AMERICAN STANDARD SERIES

ALPHA-8A

Recommended for professional audio midrange applications in a sealed cabinet, or as a midbass in a vented satellite enclosure.

- 250 W Program Power
- 8" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input checked="" type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input type="checkbox"/>
Bass Guitar	<input checked="" type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	8", 203 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	250 W
Nominal Power	125 W
Resonance	73 Hz
Usable Frequency Range	58 Hz – 5 kHz
Sensitivity*	94 dB
Magnet Weight	20 oz.
Gap Height	0.25", 6.4 mm
Voice Coil Diameter	1.5", 38 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Polyimide former
- Ferrite magnet
- Vented core
- Pressed steel basket
- Paper cone
- Cloth cone edge
- Solid composition paper dust cap




THIELE & SMALL PARAMETERS

Fs	73 Hz
Re	5.3 Ω
Le	0.44 mH
Qms	4.6
Qes	0.68

MOUNTING INFORMATION

Recommended Enclosure Volume	5–7 liters, 0.18–0.25 cu.ft.
Sealed	
Vented	16.7–25.5 liters, 0.59–0.9 cu.ft.
Qts	0.59
Driver Volume Displaced	0.02 cu.ft., 0.58 liters
Vas	0.63 cu.ft., 17.7 liters
Overall Diameter	8.24", 209.3 mm
Vd	67 cc
Baffle Hole Diameter	7.13", 181.1 mm
Cms	0.28 mm/N
Front Sealing Gasket	Yes
BL	7.8 T-M
Rear Sealing Gasket	Yes
Mms	17 grams
Mounting Holes Diameter	0.22", 5.6 mm
EBP	107
Mounting Holes B.C.D.	7.75", 196.9 mm
Xmax	3.2 mm
Depth	3.25", 82.6 mm
Sd	210 cm2
Net Weight	4.3 lbs , 1.95 kg
Xlim	7.1 mm
Shipping Weight	5.1 lbs , 2.31 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

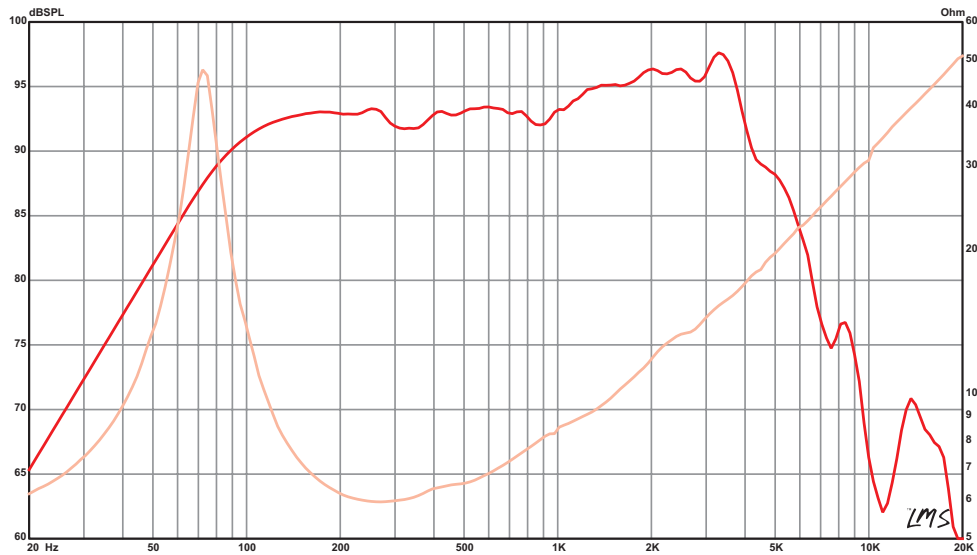

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

AMERICAN STANDARD SERIES

ALPHA-8MRA

Recommended for pro audio and bass guitar applications as a midrange. Sealed basket makes this woofer independent of enclosure design.

- 250 W Program Power
- 8” Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input checked="" type="checkbox"/>	Sealed Box	<input type="checkbox"/>
Midbass	<input type="checkbox"/>	Vented Box	<input type="checkbox"/>
Woofer	<input type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input checked="" type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	8", 203 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	250 W
Nominal Power	125 W
Resonance	514 Hz
Usable Frequency Range	400 Hz – 4.8 kHz
Sensitivity*	100.9 dB
Magnet Weight	20 oz.
Gap Height	0.25", 6.4 mm
Voice Coil Diameter	1.5", 38 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Polyimide former
- Ferrite magnet
- Vented core
- Pressed steel basket with closed back
- Paper cone
- Paper cone edge
- Solid composition paper dust cap




THIELE & SMALL PARAMETERS

Fs	514 Hz
Re	7.32 Ω
Le	0.34 mH
Qms	4.48
Qes	2.08

MOUNTING INFORMATION

Recommended Enclosure Volume	N/A
Sealed	
Vented	N/A
Qts	1.42
Driver Volume Displaced	0.02 cu.ft., 0.58 liters
Vas	0.03 cu.ft., 0.8 liters
Overall Diameter	8.22", 208.8 mm
Vd	0 cc
Baffle Hole Diameter	7.19", 182.6 mm
Cms	0.01 mm/N
Front Sealing Gasket	Yes
BL	8.9 T-M
Rear Sealing Gasket	Yes
Mms	7 grams
Mounting Holes Diameter	0.22", 5.6 mm
EBP	247
Mounting Holes B.C.D.	7.78", 197.6 mm
Xmax	1.6 mm
Depth	3.25", 82.6 mm
Sd	205.9 cm2
Net Weight	4.4 lbs , 2 kg
Xlim	3 mm
Shipping Weight	5.1 lbs , 2.31 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

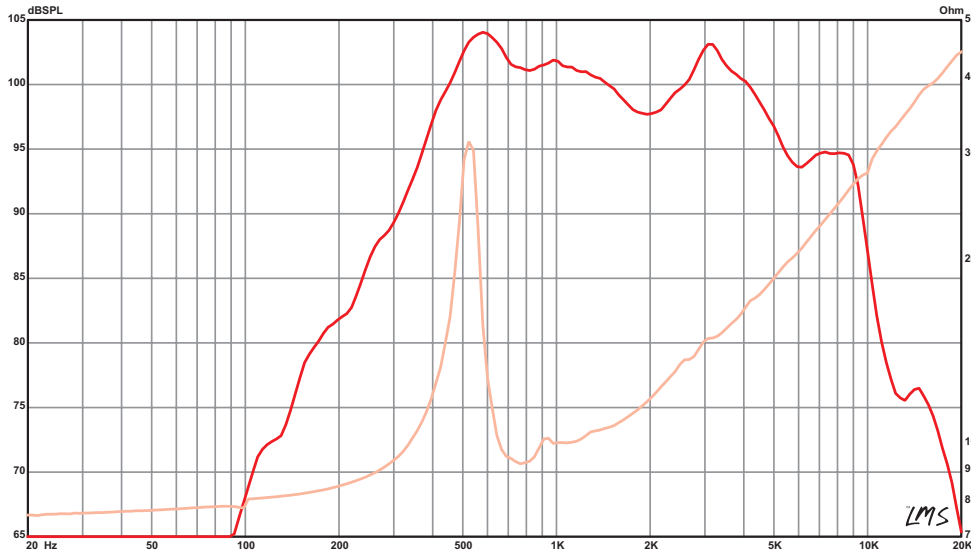

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

AMERICAN STANDARD SERIES

BETA-8A

Recommended for professional audio midbass applications or as a woofer in vented enclosures. Also suitable as a midbass speaker in sealed enclosures.

- 450 W Program Power
- 8” Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input checked="" type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	8", 203 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	450 W
Nominal Power	225 W
Resonance	65 Hz
Usable Frequency Range	78 Hz – 4.5 kHz
Sensitivity*	95.1 dB
Magnet Weight	34 oz.
Gap Height	0.312", 7.9 mm
Voice Coil Diameter	2", 51 mm

MATERIALS OF CONSTRUCTION

- Aluminum voice coil
- Polyimide former
- Ferrite magnet
- Vented core
- Pressed steel basket
- Paper cone
- Cloth cone edge
- Solid composition paper dust cap




THIELE & SMALL PARAMETERS

Fs	65 Hz
Re	5.99 Ω
Le	0.49 mH
Qms	4.95
Qes	0.42

MOUNTING INFORMATION

Recommended Enclosure Volume	5.7–9.9 liters,
Sealed	0.2–0.35 cu.ft.
Vented	8.5–19 liters,
	0.3–0.67 cu.ft.
Qts	0.38
Driver Volume Displaced	0.027 cu.ft., 0.76 liters
Vas	0.82 cu.ft., 23.3 liters
Overall Diameter	8.24", 209.3 mm
Vd	63 cc
Baffle Hole Diameter	7.13", 181.1 mm
Cms	0.37 mm/N
Front Sealing Gasket	Yes
BL	9.6 T-M
Rear Sealing Gasket	Yes
Mms	16 grams
Mounting Holes Diameter	0.22", 5.6 mm
EBP	156
Mounting Holes B.C.D.	7.75", 196.9 mm
Xmax	3 mm
Depth	3.5", 88.9 mm
Sd	210 cm2
Net Weight	6.6 lbs , 2.99 kg
Xlim	7.4 mm
Shipping Weight	7.4 lbs , 3.36 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

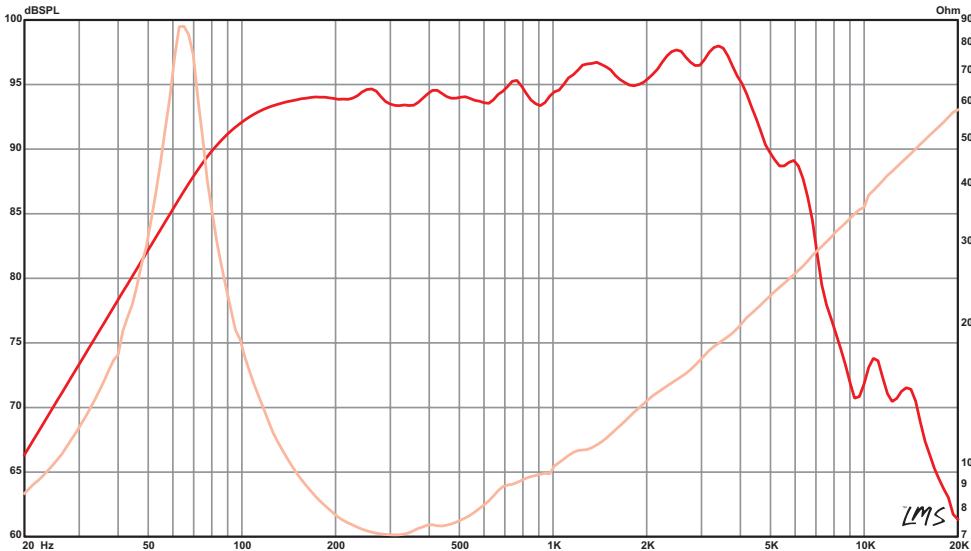

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

AMERICAN STANDARD SERIES

BETA-8CX

Recommended for professional audio midrange reproduction in sealed enclosures. Also suitable for midbass or floor monitor applications in vented 2-way cabinets. A great choice for home hi-fi, satellites, and acoustic guitar applications.

- 500 W Program Power
- 8” Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input checked="" type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	8", 203 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	500 W
Nominal Power	250 W
Resonance	62 Hz
Usable Frequency Range	95 Hz – 3.3 kHz
Sensitivity*	92.9 dB
Magnet Weight	38 oz.
Gap Height	0.312", 7.9 mm
Voice Coil Diameter	2", 51 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Kapton former
- Ferrite magnet
- Tapered Coax
- Pressed steel basket
- Paper Cone
- Sealed cloth cone edge
- Zurette dust cap



The data for this coaxial woofer was calculated with the ASD:1001 driver screwed into the woofer, but not active.


THIELE & SMALL PARAMETERS

Fs	62 Hz
Re	5.37 Ω
Le	0.67 mH
Qms	6.57
Qes	0.31

MOUNTING INFORMATION

Recommended Enclosure Volume	3.4–9.91 liters,
Sealed	0.12–0.35 cu.ft.
Vented	7.08–16.99 liters,
	0.25–0.6 cu.ft.
Qts	0.29
Driver Volume Displaced	0.028 cu.ft., 0.79 liters
Vas	0.76 cu.ft., 21.43 liters
Overall Diameter	8.24", 209.3 mm
Vd	67.2 cc
Baffle Hole Diameter	7.13", 181.1 mm
Cms	0.35 mm/N
Front Sealing Gasket	Yes
BL	11.21 T-M
Rear Sealing Gasket	Yes
Mms	19 grams
Mounting Holes Diameter	0.22", 5.6 mm
EBP	201
Mounting Holes B.C.D.	7.75", 196.9 mm
Xmax	3.2 mm
Depth	3.5", 88.9 mm
Sd	210 cm2
Net Weight	6.8 lbs , 3.08 kg
Xlim	6.9 mm
Shipping Weight	7.5 lbs , 3.4 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

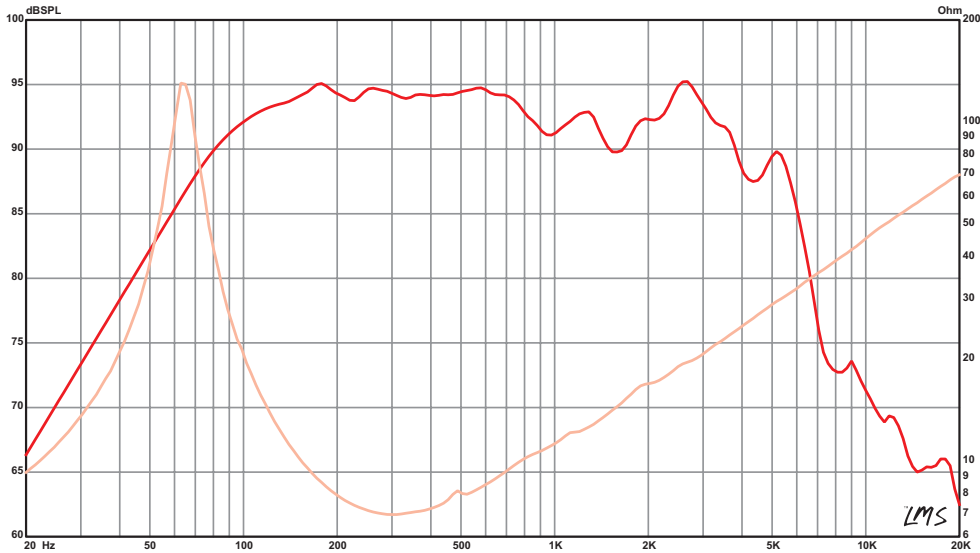

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

AMERICAN STANDARD SERIES

ALPHA-10A

Recommended for professional audio midbass applications in a small sealed cabinet.

- 300 W Program Power
- 10” Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input checked="" type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input checked="" type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	10", 254 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	300 W
Nominal Power	150 W
Resonance	50 Hz
Usable Frequency Range	57 Hz – 4.5 kHz
Sensitivity*	95.6 dB
Magnet Weight	20 oz.
Gap Height	0.25", 6.4 mm
Voice Coil Diameter	1.5", 38 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Polyimide former
- Ferrite magnet
- Vented and extended core
- Pressed steel basket
- Paper cone
- Cloth cone edge
- Solid composition paper dust cap




THIELE & SMALL PARAMETERS

Fs	50 Hz
Re	5.31 Ω
Le	0.66 mH
Qms	5.21
Qes	0.66

MOUNTING INFORMATION

Recommended Enclosure Volume	8.5–11.3 liters,
Sealed	0.3–0.4 cu.ft.
Vented	28.3–53.8 liters,
	1–1.9 cu.ft.
Qts	0.59
Driver Volume Displaced	0.034 cu.ft., 0.95 liters
Vas	2.9 cu.ft., 82.2 liters
Overall Diameter	10.11", 256.8 mm
Vd	114 cc
Baffle Hole Diameter	9.13", 231.9 mm
Cms	0.46 mm/N
Front Sealing Gasket	Yes
BL	7.5 T-M
Rear Sealing Gasket	Yes
Mms	22 grams
Mounting Holes Diameter	0.23", 5.8 mm
EBP	76
Mounting Holes B.C.D.	9.6", 243.8 mm
Xmax	3.2 mm
Depth	3.9", 99.1 mm
Sd	355.4 cm2
Net Weight	4.5 lbs , 2.04 kg
Xlim	9.1 mm
Shipping Weight	5.6 lbs , 2.54 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

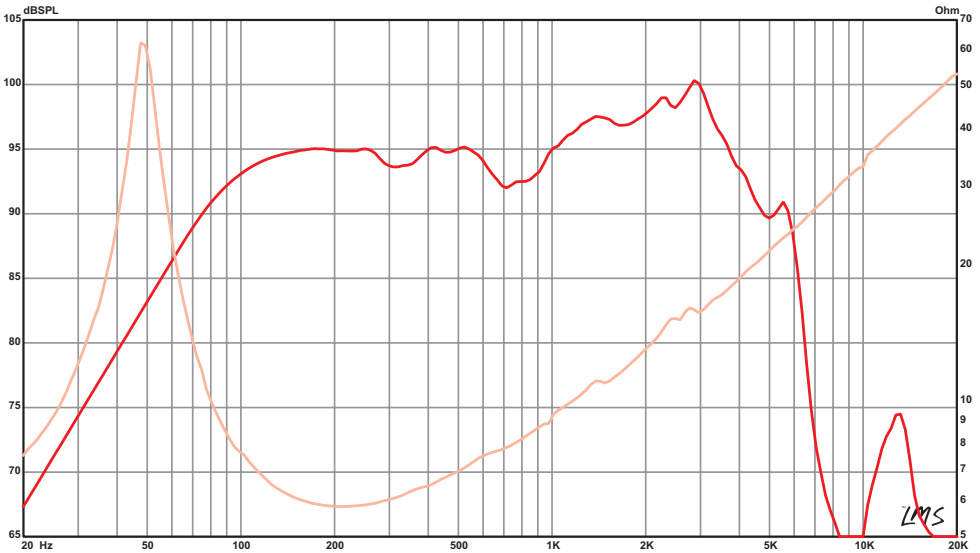

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

AMERICAN STANDARD SERIES

BETA-10CBMRA

Recommended for high power pro audio and car audio midrange applications. Sealed basket affords this speaker cabinet independence.

- 400 W Program Power
- 10" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input checked="" type="checkbox"/>	Sealed Box	<input type="checkbox"/>
Midbass	<input type="checkbox"/>	Vented Box	<input type="checkbox"/>
Woofer	<input type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	10", 254 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	400 W
Nominal Power	200 W
Resonance	326 Hz
Usable Frequency Range	300 Hz – 4 kHz
Sensitivity*	99.6 dB
Magnet Weight	34 oz.
Gap Height	0.313", 8 mm
Voice Coil Diameter	2", 51 mm

MATERIALS OF CONSTRUCTION

- Aluminum voice coil
- Polyimide former
- Ferrite magnet
- Non-Vented core
- Pressed steel basket
- Paper cone
- Cloth cone edge
- Solid composition paper dust cap




THIELE & SMALL PARAMETERS

Fs	326 Hz
Re	5.68 Ω
Le	0.48 mH
Qms	7.14
Qes	2.27

MOUNTING INFORMATION

Recommended Enclosure Volume	N/A
Sealed	
Vented	N/A
Qts	1.73
Vas	0.06 cu.ft., 1.7 liters
Vd	52.5 cc
Cms	0.01 mm/N
BL	9.5 T-M
Mms	18 grams
EBP	143
Xmax	1.5 mm
Sd	350.1 cm2
Xlim	3 mm
Driver Volume Displaced	0.039 cu.ft., 1.1 liters
Overall Diameter	10.09", 256.3 mm
Baffle Hole Diameter	9.18", 233.2 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.25", 6.4 mm
Mounting Holes B.C.D.	9.66", 245.4 mm
Depth	3.56", 90.4 mm
Net Weight	7.3 lbs , 3.31 kg
Shipping Weight	8.3 lbs , 3.76 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

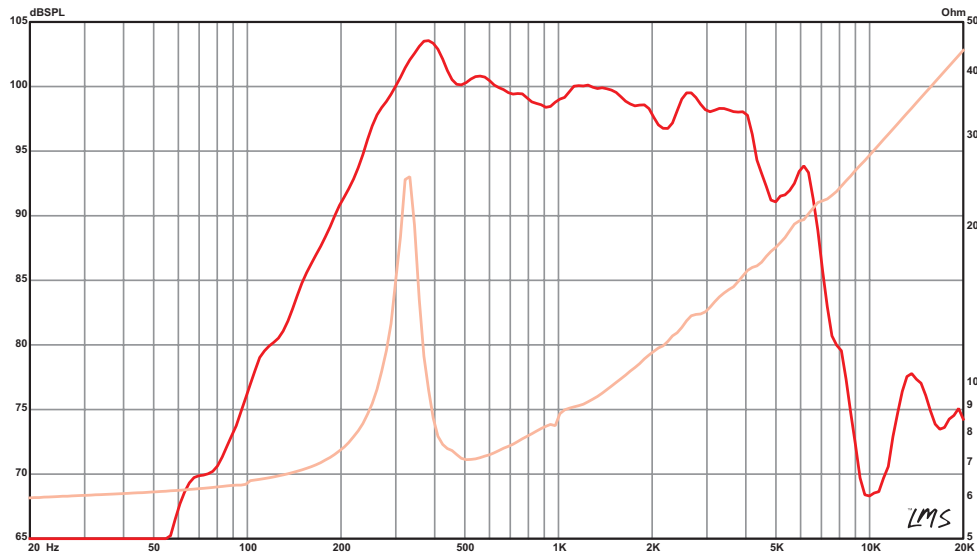

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

AMERICAN STANDARD SERIES

BETA-10A

Recommended for professional audio, bass guitar, midbass or floor monitor applications in sealed enclosures. Also works well as a midbass or woofer in vented enclosures.

- 500 W Program Power
- 10" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input checked="" type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	10", 254 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	500 W
Nominal Power	250 W
Resonance	53 Hz
Usable Frequency Range	51 Hz – 3.8 kHz
Sensitivity*	97 dB
Magnet Weight	34 oz.
Gap Height	0.312", 7.9 mm
Voice Coil Diameter	2", 51 mm

MATERIALS OF CONSTRUCTION

- Aluminum voice coil
- Polyimide former
- Ferrite magnet
- Vented core
- Pressed steel basket
- Paper cone
- Cloth cone edge
- Solid composition paper dust cap




THIELE & SMALL PARAMETERS

Fs	53 Hz
Re	5.75 Ω
Le	0.67 mH
Qms	8.14
Qes	0.52

MOUNTING INFORMATION

Recommended Enclosure Volume	8.5–14.2 liters, 0.3–0.5 cu.ft.
Sealed	
Vented	19.8–70.8 liters, 0.7–2.5 cu.ft.
Qts	0.49
Vas	2.12 cu.ft., 60.1 liters
Vd	103.5 cc
Cms	0.36 mm/N
BL	9.6 T-M
Mms	25 grams
EBP	102
Xmax	3 mm
Sd	344.9 cm2
Xlim	8.6 mm
Driver Volume Displaced	0.04 cu.ft., 1.13 liters
Overall Diameter	10.11", 256.8 mm
Baffle Hole Diameter	9.13", 231.9 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.23", 5.8 mm
Mounting Holes B.C.D.	9.6", 243.8 mm
Depth	3.98", 101.1 mm
Net Weight	6.8 lbs , 3.08 kg
Shipping Weight	7.8 lbs , 3.54 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

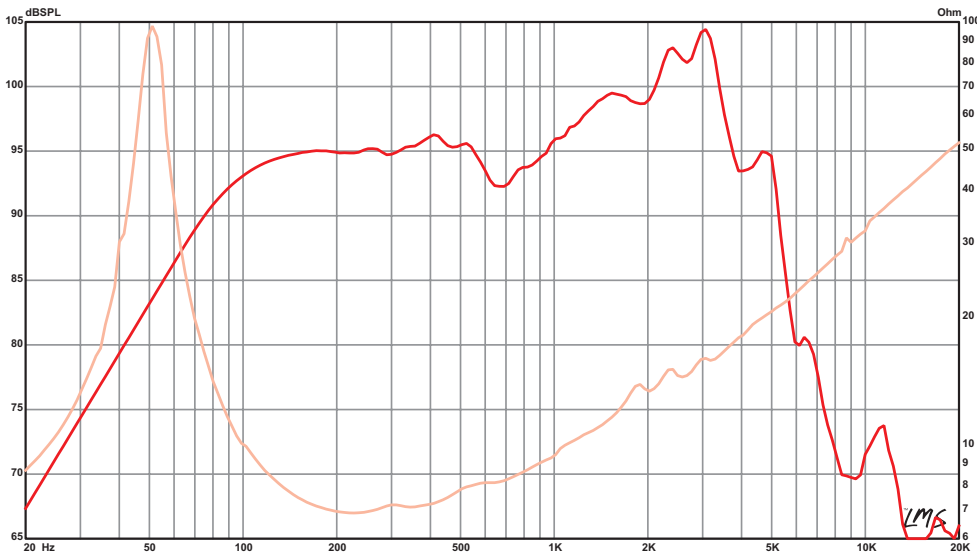

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

AMERICAN STANDARD SERIES

BETA-10CX

Recommended for professional audio vocal wedges, or midbass in a sealed enclosure. Also works well in a vented enclosure as a satellite or monitor.

- 500 W Program Power
- 10" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input checked="" type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofers	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	10", 254 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	500 W
Nominal Power	250 W
Resonance	49 Hz
Usable Frequency Range	60 Hz – 4 kHz
Sensitivity*	94.3 dB
Magnet Weight	38 oz.
Gap Height	0.312", 7.9 mm
Voice Coil Diameter	2", 51 mm

MATERIALS OF CONSTRUCTION

Copper voice coil
Kapton former
Ferrite magnet
Tapered Coax
Pressed steel basket
Paper cone
Cloth cone edge
Zurette dust cap



The data for this coaxial woofer was calculated with the ASD:1001 driver screwed into the woofer, but not active.


THIELE & SMALL PARAMETERS

Fs	49 Hz
Re	5.48 Ω
Le	0.67 mH
Qms	6.16
Qes	0.41

MOUNTING INFORMATION

Recommended Enclosure Volume	14.16–42.48 liters, 0.5–1.5 cu.ft.
Sealed	
Vented	15.29–87.78 liters, 0.54–3.1 cu.ft.
Driver Volume Displaced	0.041 cu.ft., 1.17 liters
Overall Diameter	10.08", 256 mm
Baffle Hole Diameter	9.18", 233.2 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.25", 6.4 mm
Mounting Holes B.C.D.	9.66", 245.4 mm
Depth	3.98", 101.1 mm
Net Weight	7.3 lbs , 3.31 kg
Shipping Weight	8.4 lbs , 3.81 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

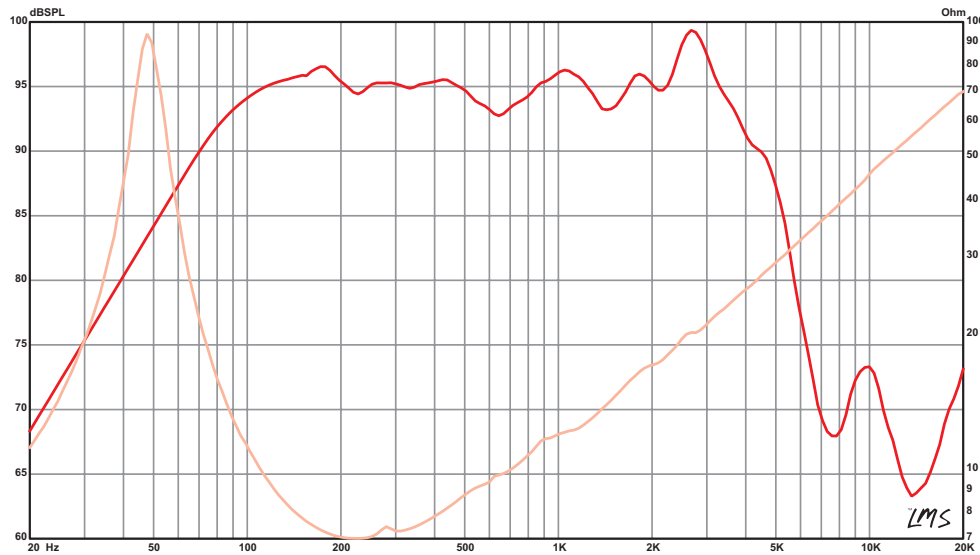

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

AMERICAN STANDARD SERIES

DELTA-10A

Recommended for professional audio and bass guitar applications as a woofer/midbass or midrange in vented monitors, satellites and multi-way enclosures.

- 700 W Program Power
- 10" Nominal Diameter
- 8 or 16 Ω

APPLICATION		ENCLOSURE	
Midrange	<input checked="" type="checkbox"/>	Sealed Box	<input type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofers	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input checked="" type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	10", 254 mm
Nominal Impedance*	8 or 16 Ω
Power Rating*	
Program Power	700 W
Nominal Power	350 W
Resonance	66 Hz
Usable Frequency Range	63 Hz – 3.7 kHz
Sensitivity*	98.8 dB
Magnet Weight	56 oz.
Gap Height	0.375", 9.5 mm
Voice Coil Diameter	2.5", 64 mm

MATERIALS OF CONSTRUCTION

Aluminum voice coil
Polyimide former
Ferrite magnet
Vented core
Pressed steel basket
Paper cone
Cloth cone edge
Solid composition paper dust cap




THIELE & SMALL PARAMETERS

Fs	66 Hz
Re	5.42 Ω
Le	0.74 mH
Qms	6.53
Qes	0.35

MOUNTING INFORMATION

Recommended Enclosure Volume	N/A
Sealed	
Vented	12.7–37.9 liters, 0.45–1.34 cu.ft.
Driver Volume Displaced	0.05 cu.ft., 1.42 liters
Overall Diameter	10.09", 256.3 mm
Baffle Hole Diameter	9.18", 233.2 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.25", 6.4 mm
Mounting Holes B.C.D.	9.66", 245.4 mm
Depth	4.25", 108 mm
Net Weight	10.8 lbs , 4.9 kg
Shipping Weight	12 lbs , 5.44 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

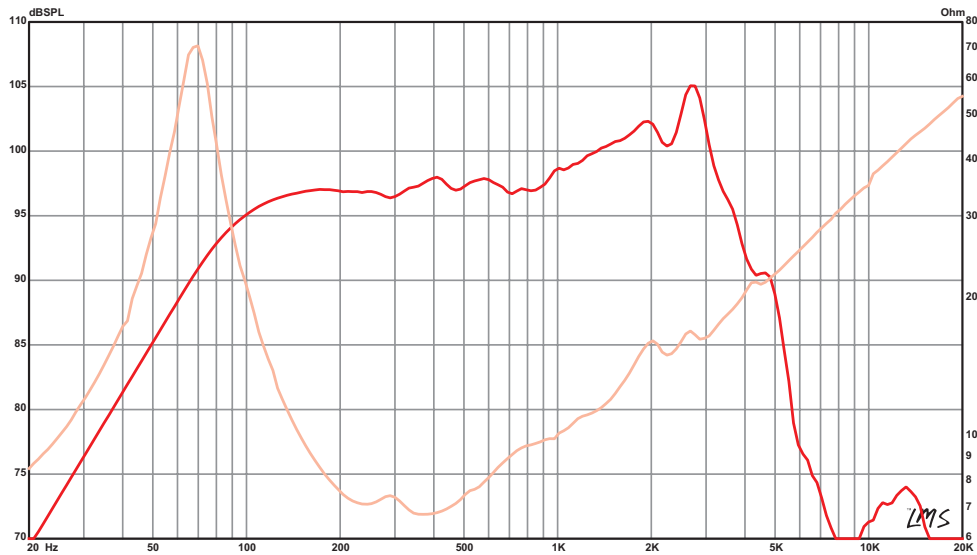

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

AMERICAN STANDARD SERIES

ALPHA-12A

Recommended for professional audio midbass applications in a small sealed or medium vented enclosure.

- 300 W Program Power
- 12" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	12", 305 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	300 W
Nominal Power	150 W
Resonance	49 Hz
Usable Frequency Range	51 Hz – 4.3 kHz
Sensitivity*	95.6 dB
Magnet Weight	20 oz.
Gap Height	0.25", 6.4 mm
Voice Coil Diameter	1.5", 38 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Polyimide former
- Ferrite magnet
- Vented and extended core
- Pressed steel basket
- Paper cone
- Cloth cone edge
- Solid composition felt dust cap




THIELE & SMALL PARAMETERS

Fs	49 Hz
Re	6.3 Ω
Le	0.79 mH
Qms	6.53
Qes	0.88

MOUNTING INFORMATION

Recommended Enclosure Volume	17–22.7 liters,
Sealed	0.6–0.8 cu.ft.
Vented	56.6–113.3 liters,
	2–4 cu.ft.
Qts	0.77
Driver Volume Displaced	0.063 cu.ft., 1.78 liters
Overall Diameter	12.26", 311.4 mm
Baffle Hole Diameter	11.06", 280.9 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.25", 6.4 mm
Mounting Holes B.C.D.	11.71", 297.4 mm
Depth	4.73", 120.1 mm
Net Weight	5.3 lbs , 2.4 kg
Shipping Weight	7.4 lbs , 3.36 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

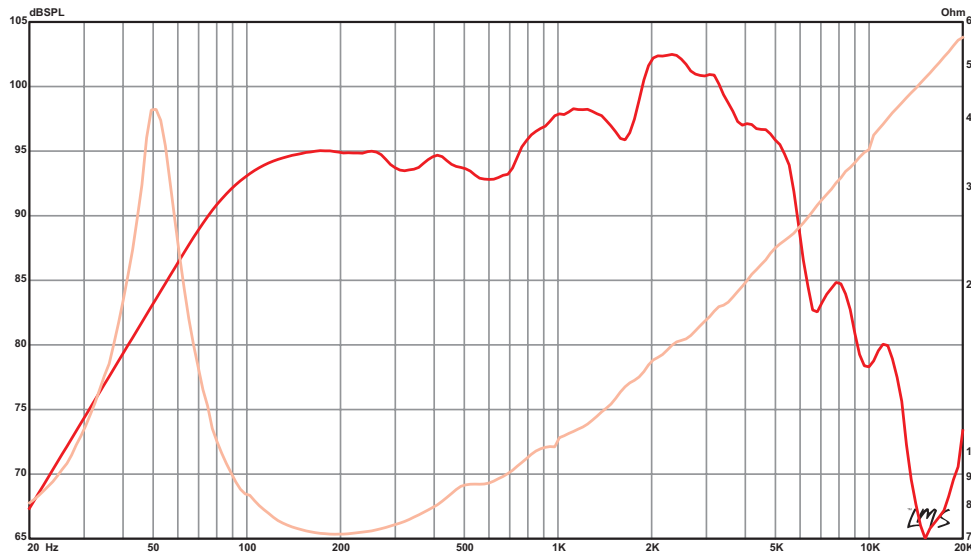

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

AMERICAN STANDARD SERIES

BETA-12LTA

Recommended for professional audio as a woofer in small sealed monitors, or as a PA woofer or monitor in a vented enclosure.

- 450 W Program Power
- 12" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input checked="" type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	12", 305 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	450 W
Nominal Power	225 W
Resonance	45 Hz
Usable Frequency Range	48 Hz – 8 kHz
Sensitivity*	97.7 dB
Magnet Weight	38 oz.
Gap Height	0.312", 7.9 mm
Voice Coil Diameter	2", 51 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Polyimide former
- Ferrite magnet
- Vented core
- Pressed steel basket
- Paper cone
- Cloth cone edge
- Solid composition paper dust cap




THIELE & SMALL PARAMETERS

Fs	45 Hz
Re	7.37 Ω
Le	0.83 mH
Qms	6.44
Qes	0.55

MOUNTING INFORMATION

Recommended Enclosure Volume	14–51 liters,
Sealed	0.5–1.8 cu.ft.
Vented	56.6–116 liters,
	2–4.1 cu.ft.
Qts	0.51
Driver Volume Displaced	0.071 cu.ft., 2 liters
Overall Diameter	12.03", 305.6 mm
Baffle Hole Diameter	11.07", 281.2 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.25", 6.4 mm
Mounting Holes B.C.D.	11.59", 294.4 mm
Depth	4.47", 113.5 mm
Net Weight	8.1 lbs , 3.67 kg
Shipping Weight	10.2 lbs , 4.63 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

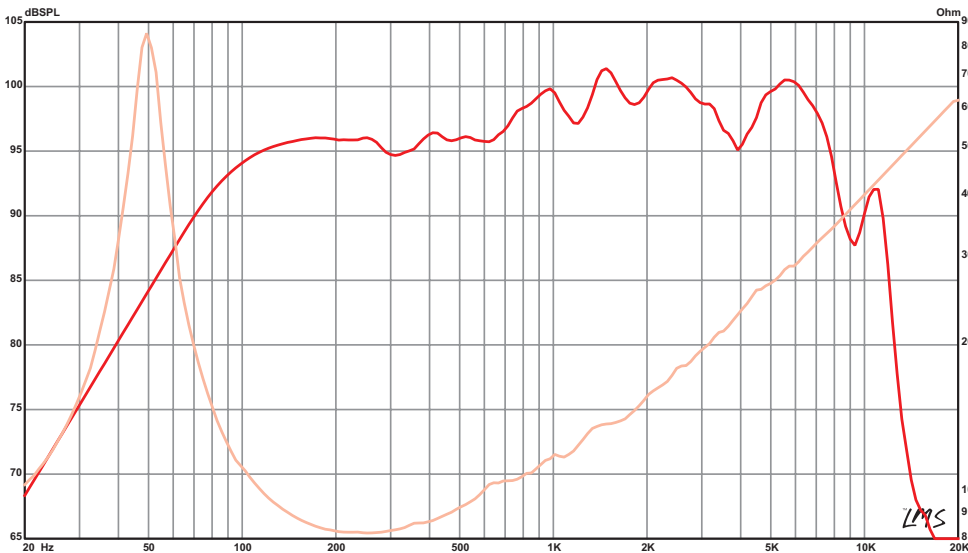

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

AMERICAN STANDARD SERIES

BETA-12A-2

One of our most versatile woofers for pro audio and bass guitar applications. A popular replacement for two-way systems. Also works well in a sealed or bandpass enclosure.

- 500 W Program Power
- 12" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input checked="" type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input checked="" type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	12", 305 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	500 W
Nominal Power	250 W
Resonance	47 Hz
Usable Frequency Range	43 Hz – 3.8 kHz
Sensitivity*	98 dB
Magnet Weight	38 oz.
Gap Height	0.312", 7.9 mm
Voice Coil Diameter	2", 51 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Polyimide former
- Ferrite magnet
- Vented and extended core
- Pressed steel basket
- Paper cone
- Cloth cone edge
- Solid composition paper dust cap




THIELE & SMALL PARAMETERS

Fs	47 Hz
Re	5 Ω
Le	0.64 mH
Qms	6
Qes	0.5

MOUNTING INFORMATION

Recommended Enclosure Volume	25.5–35.4 liters,
Sealed	0.9–1.25 cu.ft.
Vented	36.8–139 liters,
Qes	1.3–4.9 cu.ft.
Qts	0.46
Vas	4.24 cu.ft., 120.1 liters
Vd	237 cc
Cms	0.29 mm/N
BL	10.8 T-M
Mms	40 grams
EBP	94
Xmax	4.4 mm
Sd	538.9 cm2
Xlim	11 mm
Driver Volume Displaced	0.071 cu.ft., 2 liters
Overall Diameter	12.03", 305.6 mm
Baffle Hole Diameter	11.07", 281.2 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.25", 6.4 mm
Mounting Holes B.C.D.	11.59", 294.4 mm
Depth	4.57", 116.1 mm
Net Weight	7.5 lbs , 3.4 kg
Shipping Weight	9.7 lbs , 4.4 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

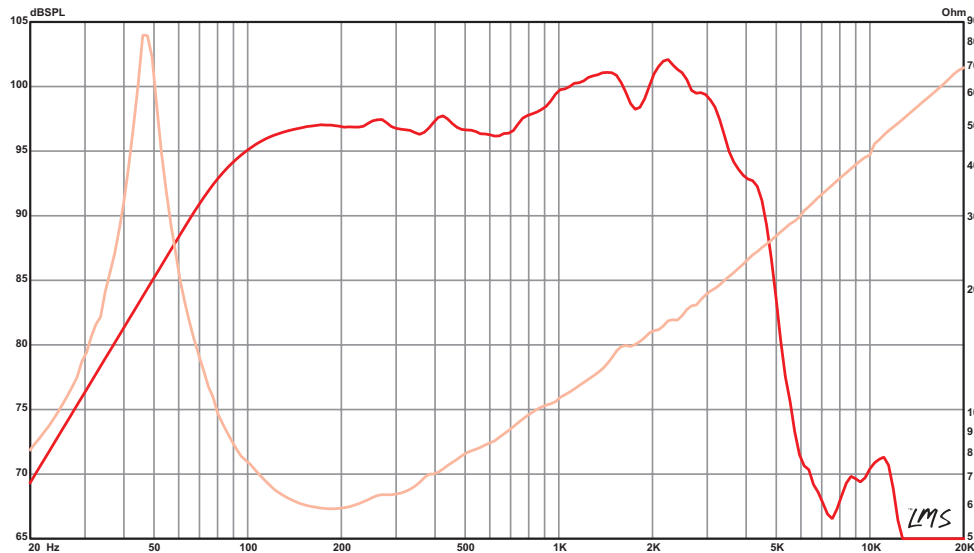

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

AMERICAN STANDARD SERIES

BETA-12CX

Recommended for professional audio as a midbass in either vented, or sealed satellite or floor monitor enclosures. Also works nicely in vented two-way enclosures used for small coverage areas. Great for newer generation FRFR (full range, flat response) systems.

- 500 W Program Power
- 12" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input checked="" type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	12", 305 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	500 W
Nominal Power	250 W
Resonance	47 Hz
Usable Frequency Range	57 Hz – 4.6 kHz
Sensitivity*	97.3 dB
Magnet Weight	38 oz.
Gap Height	0.312", 7.9 mm
Voice Coil Diameter	2", 51 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Kapton former
- Ferrite magnet
- Tapered Coax
- Pressed steel basket
- Paper cone
- Cloth cone edge
- Screened cloth dust cap



The data for this coaxial woofer was calculated with the ASD:1001 driver screwed into the woofer, but not active.


THIELE & SMALL PARAMETERS

Fs	47 Hz
Re	5.42 Ω
Le	0.64 mH
Qms	5.64
Qes	0.52

MOUNTING INFORMATION

Recommended Enclosure Volume	26.9–70.79 liters,
Sealed	0.95–2.5 cu.ft.
Vented	32.85–158.58 liters,
Qes	1.16–5.6 cu.ft.
Qts	0.48
Vas	4.27 cu.ft., 120.94 liters
Vd	188.6 cc
Cms	0.3 mm/N
BL	10.79 T-M
Mms	38 grams
EBP	90
Xmax	3.5 mm
Sd	538.9 cm2
Xlim	10.4 mm
Driver Volume Displaced	0.071 cu.ft., 2 liters
Overall Diameter	12.03", 305.6 mm
Baffle Hole Diameter	11.07", 281.2 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.25", 6.4 mm
Mounting Holes B.C.D.	11.59", 294.4 mm
Depth	4.47", 113.5 mm
Net Weight	7.8 lbs , 3.54 kg
Shipping Weight	10 lbs , 4.54 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

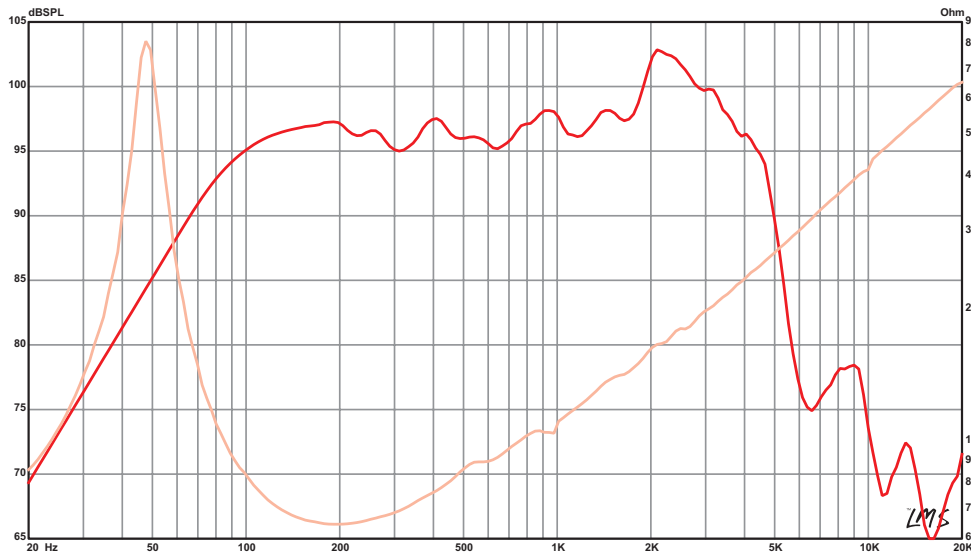

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

AMERICAN STANDARD SERIES

DELTA-12A

Recommended for professional audio as a midbass or woofer (with high-pass filter) in vented enclosures.

- **800 W** Program Power
- **12"** Nominal Diameter
- **8** or **16 Ω**

APPLICATION		ENCLOSURE	
Midrange	<input checked="" type="checkbox"/>	Sealed Box	<input type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	12", 305 mm
Nominal Impedance*	8 or 16 Ω
Power Rating*	
Program Power	800 W
Nominal Power	400 W
Resonance	55 Hz
Usable Frequency Range	54 Hz – 5 kHz
Sensitivity*	98.3 dB
Magnet Weight	56 oz.
Gap Height	0.375", 9.5 mm
Voice Coil Diameter	2.5", 64 mm

MATERIALS OF CONSTRUCTION

- Aluminum voice coil
- Polyimide former
- Ferrite magnet
- Vented core
- Pressed steel basket
- Paper cone
- Cloth cone edge
- Solid composition felt dust cap




THIELE & SMALL PARAMETERS

Fs	55 Hz
Re	6.3 Ω
Le	0.74 mH
Qms	5.27
Qes	0.46

MOUNTING INFORMATION

Recommended Enclosure Volume	N/A
Sealed	
Vented	25.5–85 liters, 0.9–3 cu.ft.
Qts	0.43
Driver Volume Displaced	0.079 cu.ft., 2.25 liters
Overall Diameter	12.03", 305.6 mm
Vas	2.87 cu.ft., 81.3 liters
Overall Diameter	12.03", 305.6 mm
Vd	125 cc
Baffle Hole Diameter	11.07", 281.2 mm
Cms	0.21 mm/N
Front Sealing Gasket	Yes
BL	13.5 T-M
Rear Sealing Gasket	Yes
Mms	39 grams
Mounting Holes Diameter	0.25", 6.4 mm
EBP	120
Mounting Holes B.C.D.	11.59", 294.4 mm
Xmax	2.4 mm
Depth	5.35", 135.9 mm
Sd	519.5 cm2
Net Weight	11.4 lbs , 5.17 kg
Xlim	9.9 mm
Shipping Weight	13.5 lbs , 6.12 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

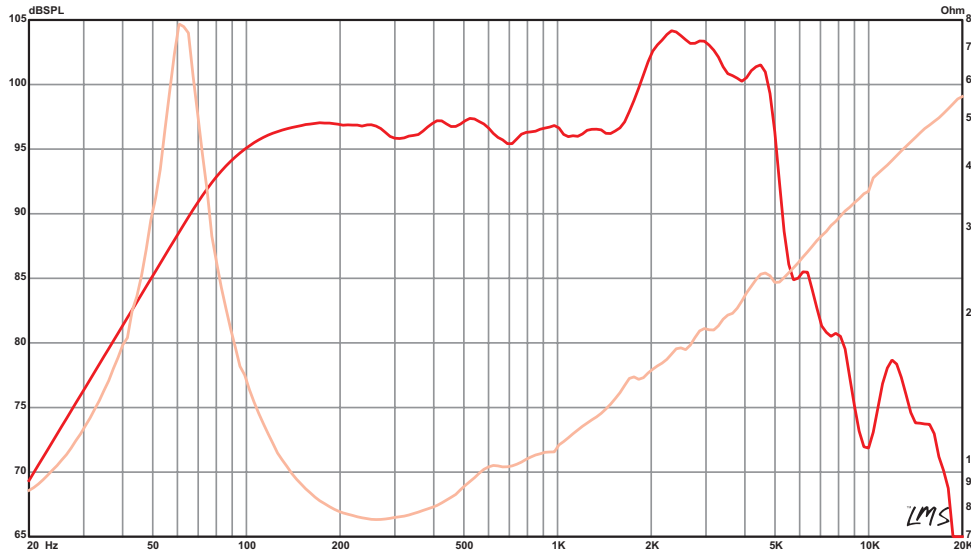

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

AMERICAN STANDARD SERIES

DELTA-12LFA

Low frequency woofer for pro audio midbass or floor monitor applications in a sealed enclosure. Also suitable as a woofer in vented bass guitar or PA enclosures.

- **1000 W** Program Power
- **12"** Nominal Diameter
- **8** or **4 Ω**

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input checked="" type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input checked="" type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	12", 305 mm
Nominal Impedance*	8 or 4 Ω
Power Rating*	
Program Power	1000 W
Nominal Power	500 W
Resonance	51 Hz
Usable Frequency Range	44 Hz – 3 kHz
Sensitivity*	94.6 dB
Magnet Weight	56 oz.
Gap Height	0.375", 9.5 mm
Voice Coil Diameter	2.5", 64 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Polyimide former
- Ferrite magnet
- Vented and extended core
- Pressed steel basket
- Paper cone
- Cloth cone edge
- Solid composition paper dust cap




THIELE & SMALL PARAMETERS

Fs	51 Hz
Re	6.06 Ω
Le	1.45 mH
Qms	7.28
Qes	0.51

MOUNTING INFORMATION

Recommended Enclosure Volume	19.8–28 liters, 0.7–1 cu.ft.
Sealed	
Vented	25.5–102 liters, 0.9–3.6 cu.ft.
Qts	0.47
Driver Volume Displaced	0.079 cu.ft., 2.25 liters
Overall Diameter	12.03", 305.6 mm
Vas	2.4 cu.ft., 67.9 liters
Overall Diameter	12.03", 305.6 mm
Vd	243 cc
Baffle Hole Diameter	11.07", 281.2 mm
Cms	0.19 mm/N
Front Sealing Gasket	Yes
BL	14.1 T-M
Rear Sealing Gasket	Yes
Mms	51 grams
Mounting Holes Diameter	0.25", 6.4 mm
EBP	100
Mounting Holes B.C.D.	11.59", 294.4 mm
Xmax	4.8 mm
Depth	5.35", 135.9 mm
Sd	506.7 cm2
Net Weight	11.8 lbs , 5.35 kg
Xlim	13.5 mm
Shipping Weight	14 lbs , 6.35 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

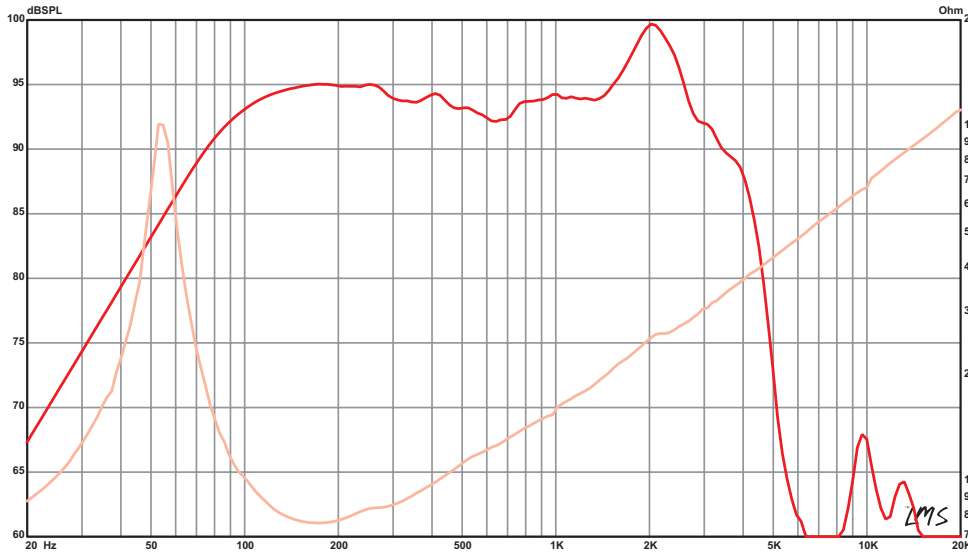

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

AMERICAN STANDARD SERIES

KAPPA-12A

Recommended for professional audio as a mid/hi or full range in a vented enclosure.

- 900 W Program Power
- 12" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input checked="" type="checkbox"/>	Sealed Box	<input type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	12", 305 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	900 W
Nominal Power	450 W
Resonance	45 Hz
Usable Frequency Range	62 Hz – 4.2 kHz
Sensitivity*	99.3 dB
Magnet Weight	80 oz.
Gap Height	0.375", 9.5 mm
Voice Coil Diameter	3", 76 mm

MATERIALS OF CONSTRUCTION

Aluminum voice coil
Polyimide former
Ferrite magnet
Vented core
Pressed steel basket
Paper cone
Cloth cone edge
Solid composition paper dust cap




THIELE & SMALL PARAMETERS

Fs	45 Hz
Re	5.41 Ω
Le	0.77 mH
Qms	7.76
Qes	0.28

MOUNTING INFORMATION

Recommended Enclosure Volume	N/A
Sealed	
Vented	34–62 liters, 1.2–2.2 cu.ft.
Qts	0.27
Driver Volume Displaced	0.09 cu.ft., 2.55 liters
Vas	3.96 cu.ft., 112.1 liters
Overall Diameter	12.26", 311.4 mm
Vd	166 cc
Baffle Hole Diameter	11", 279.4 mm
Cms	0.3 mm/N
Front Sealing Gasket	Yes
BL	15.2 T-M
Rear Sealing Gasket	Yes
Mms	42 grams
Mounting Holes Diameter	0.25", 6.4 mm
EBP	161
Mounting Holes B.C.D.	11.71", 297.4 mm
Xmax	3.2 mm
Depth	5.63", 143 mm
Sd	519.5 cm2
Net Weight	14.9 lbs , 6.76 kg
Xlim	11.5 mm
Shipping Weight	17.9 lbs , 8.12 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

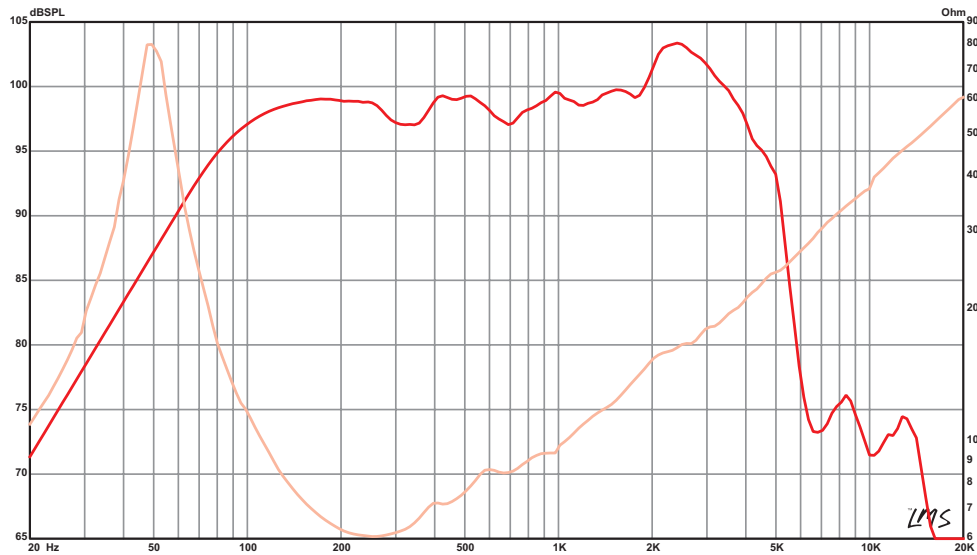

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

AMERICAN STANDARD SERIES

ALPHA-15A

Recommended for professional audio as a woofer in a vented or sealed enclosure. The high Qts makes it ideal for open baffle hi-fi designs.

- 400 W Program Power
- 15" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input checked="" type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	15", 381 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	400 W
Nominal Power	200 W
Resonance	41 Hz
Usable Frequency Range	46 Hz – 3.5 kHz
Sensitivity*	97 dB
Magnet Weight	25 oz.
Gap Height	0.25", 6.4 mm
Voice Coil Diameter	1.5", 38 mm

MATERIALS OF CONSTRUCTION

Copper voice coil
Polyimide former
Ferrite magnet
Vented and extended core
Pressed steel basket
Paper cone
Cloth cone edge
Solid composition paper dust cap




THIELE & SMALL PARAMETERS

Fs	41 Hz
Re	5.88 Ω
Le	0.84 mH
Qms	7.23
Qes	1.53

MOUNTING INFORMATION

Recommended Enclosure Volume	71–85 liters, 2.5–3 cu.ft.
Sealed	
Vented	106–177 liters, 3.75–6.25 cu.ft.
Qts	1.26
Driver Volume Displaced	0.113 cu.ft., 3.21 liters
Vas	9.18 cu.ft., 260 liters
Overall Diameter	15.15", 384.8 mm
Vd	325 cc
Baffle Hole Diameter	13.87", 352.3 mm
Cms	0.25 mm/N
Front Sealing Gasket	Yes
BL	7.7 T-M
Rear Sealing Gasket	Yes
Mms	59 grams
Mounting Holes Diameter	0.25", 6.4 mm
EBP	27
Mounting Holes B.C.D.	14.56", 369.8 mm
Xmax	3.8 mm
Depth	5.83", 148.1 mm
Sd	856.3 cm2
Net Weight	6.7 lbs , 3.04 kg
Xlim	8.4 mm
Shipping Weight	8.8 lbs , 3.99 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

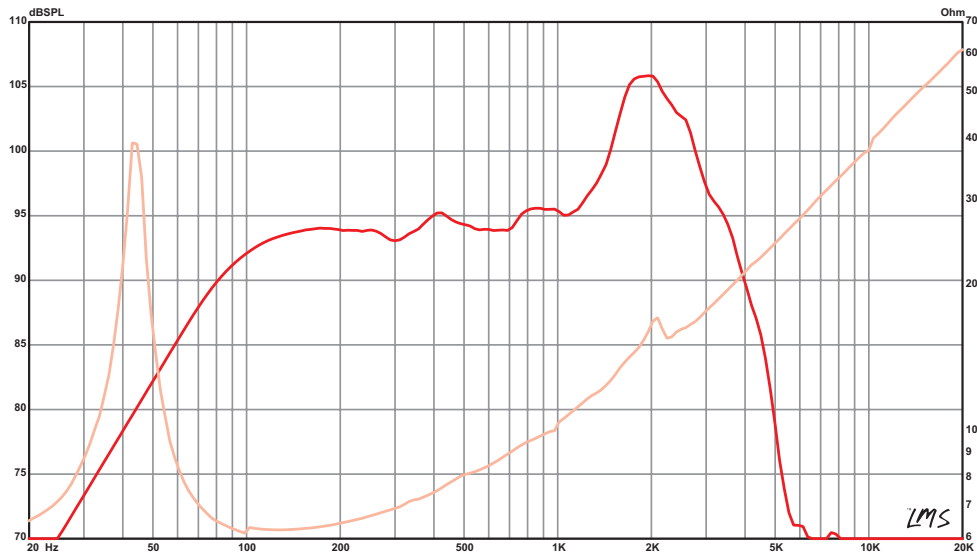

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

AMERICAN STANDARD SERIES

BETA-15A

Recommended for professional audio as a woofer in sealed and vented enclosures. Also works great for midbass and bass guitar applications.

- 600 W Program Power
- 15" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input type="checkbox"/>
Bass Guitar	<input checked="" type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	15", 381 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	600 W
Nominal Power	300 W
Resonance	35 Hz
Usable Frequency Range	45 Hz – 3.7 kHz
Sensitivity*	98.2 dB
Magnet Weight	34 oz.
Gap Height	0.312", 7.9 mm
Voice Coil Diameter	2", 51 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Polyimide former
- Ferrite magnet
- Vented and extended core
- Pressed steel basket
- Paper cone
- Cloth cone edge
- Solid composition paper dust cap




THIELE & SMALL PARAMETERS

Fs	35 Hz
Re	6.32 Ω
Le	1.1 mH
Qms	8.1
Qes	0.63

MOUNTING INFORMATION

Recommended Enclosure Volume	45–62 liters,
Sealed	1.6–2.2 cu.ft.
Vented	99–175.6 liters,
	3.5–6.2 cu.ft.
Driver Volume Displaced	0.118 cu.ft., 3.33 liters
Overall Diameter	15.15", 384.8 mm
Baffle Hole Diameter	13.87", 352.3 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.25", 6.4 mm
Mounting Holes B.C.D.	14.56", 369.8 mm
Depth	6.05", 153.7 mm
Net Weight	8.8 lbs , 3.99 kg
Shipping Weight	10.8 lbs , 4.9 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

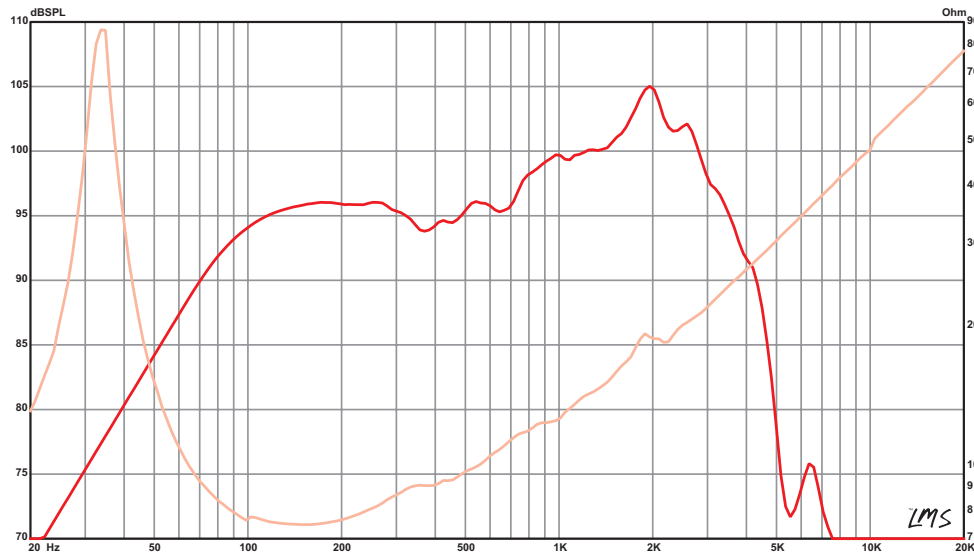

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

AMERICAN STANDARD SERIES

DELTA-15A

Recommended for professional audio as a midbass or vocal wedge in a sealed enclosure. Also suitable as a midbass or woofer in vented enclosures.

- 800 W Program Power
- 15" Nominal Diameter
- 8 or 16 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	15", 381 mm
Nominal Impedance*	8 or 16 Ω
Power Rating*	
Program Power	800 W
Nominal Power	400 W
Resonance	40 Hz
Usable Frequency Range	48 Hz – 4 kHz
Sensitivity*	100 dB
Magnet Weight	56 oz.
Gap Height	0.375", 9.5 mm
Voice Coil Diameter	2.5", 64 mm

MATERIALS OF CONSTRUCTION

- Aluminum voice coil
- Polyimide former
- Ferrite magnet
- Vented core
- Pressed steel basket
- Paper cone
- Cloth cone edge
- Solid composition paper dust cap




THIELE & SMALL PARAMETERS

Fs	40 Hz
Re	6.3 Ω
Le	0.64 mH
Qms	8.05
Qes	0.57

MOUNTING INFORMATION

Recommended Enclosure Volume	37–42.5 liters,
Sealed	1.3–1.5 cu.ft.
Vented	82–161.4 liters,
	2.9–5.7 cu.ft.
Driver Volume Displaced	0.128 cu.ft., 3.62 liters
Overall Diameter	15.15", 384.8 mm
Baffle Hole Diameter	13.87", 352.3 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.25", 6.4 mm
Mounting Holes B.C.D.	14.56", 369.8 mm
Depth	6.05", 153.7 mm
Net Weight	12.3 lbs , 5.58 kg
Shipping Weight	14.4 lbs , 6.53 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

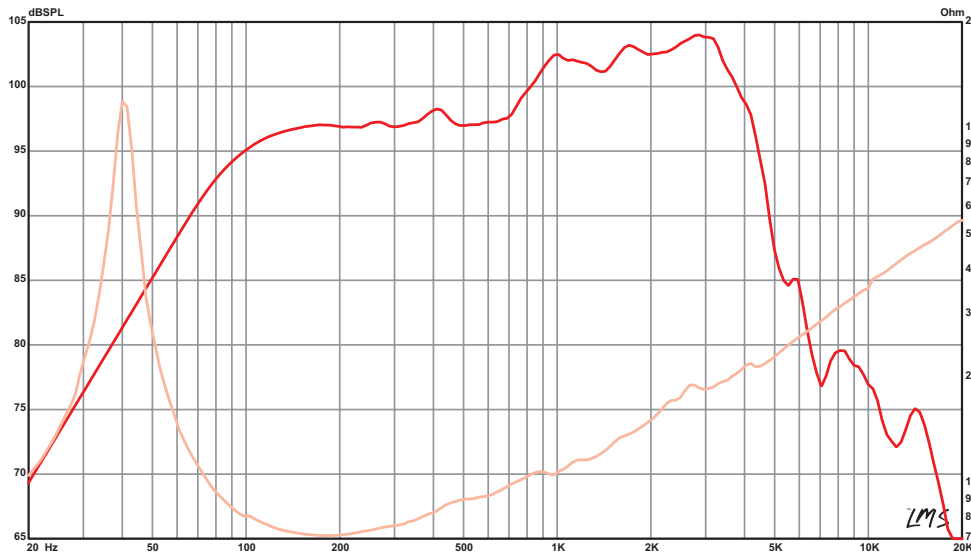

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

AMERICAN STANDARD SERIES

DELTA-15LFA

Low frequency woofer for pro audio as a midbass or floor monitor in a sealed enclosure. Also suitable as a woofer in vented bass guitar or PA enclosures.

- 1000 W Program Power
- 15" Nominal Diameter
- 8 or 4 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input checked="" type="checkbox"/>	Horn Loading	<input type="checkbox"/>
Bass Guitar	<input checked="" type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	15", 381 mm
Nominal Impedance*	8 or 4 Ω
Power Rating*	
Program Power	1000 W
Nominal Power	500 W
Resonance	39 Hz
Usable Frequency Range	42 Hz – 3.2 kHz
Sensitivity*	96 dB
Magnet Weight	56 oz.
Gap Height	0.375", 9.5 mm
Voice Coil Diameter	2.5", 64 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Polyimide former
- Ferrite magnet
- Vented and extended core
- Pressed steel basket
- Paper cone
- Cloth cone edge
- Solid composition paper dust cap




THIELE & SMALL PARAMETERS

Fs	39 Hz
Re	6.11 Ω
Le	1.37 mH
Qms	6.3
Qes	0.52

MOUNTING INFORMATION

Recommended Enclosure Volume	36.8–42.5 liters,
Sealed	1.3–1.5 cu.ft.
Vented	85–167 liters,
	3–5.9 cu.ft.
Qts	0.48
Driver Volume Displaced	0.128 cu.ft., 3.62 liters
Overall Diameter	15.15", 384.8 mm
Baffle Hole Diameter	13.87", 352.3 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.25", 6.4 mm
Mounting Holes B.C.D.	14.56", 369.8 mm
Depth	6.3", 160 mm
Net Weight	12.8 lbs , 5.81 kg
Shipping Weight	14.8 lbs , 6.71 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

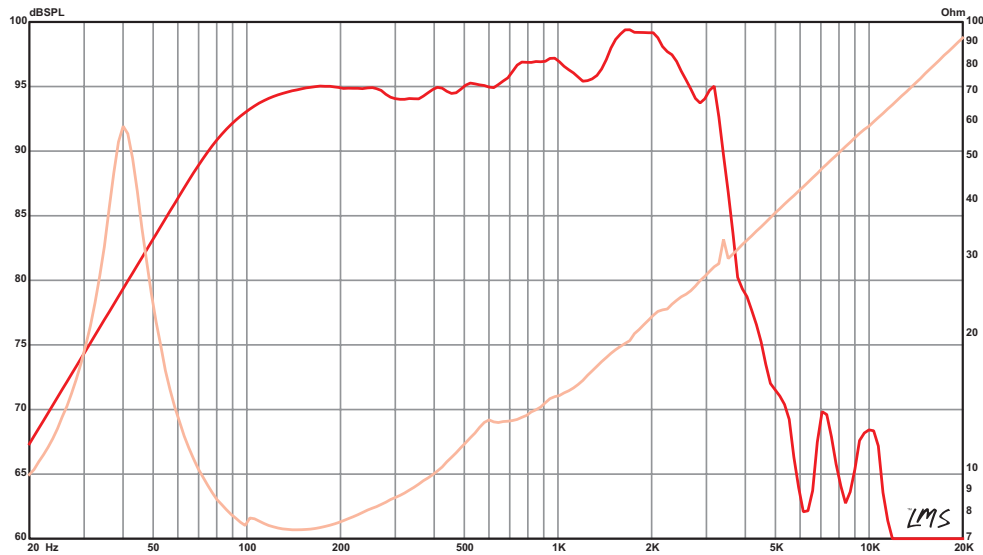

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

AMERICAN STANDARD SERIES

KAPPA-15A

Recommended for professional audio in a vented midbass or bass enclosure. Great for monitors and two-way systems.

- 900 W Program Power
- 15" Nominal Diameter
- 8 or 4 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	15", 381 mm
Nominal Impedance*	8 or 4 Ω
Power Rating*	
Program Power	900 W
Nominal Power	450 W
Resonance	33 Hz
Usable Frequency Range	52 Hz – 2.3 kHz
Sensitivity*	100.5 dB
Magnet Weight	80 oz.
Gap Height	0.375", 9.5 mm
Voice Coil Diameter	3", 76 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Polyimide former
- Ferrite magnet
- Vented core
- Pressed steel basket
- Paper cone
- Cloth cone edge
- Solid composition paper dust cap




THIELE & SMALL PARAMETERS

Fs	33 Hz
Re	5.22 Ω
Le	1.05 mH
Qms	8.9
Qes	0.33

MOUNTING INFORMATION

Recommended Enclosure Volume	N/A
Sealed	
Vented	45–113 liters,
	1.6–4 cu.ft.
Qts	0.32
Driver Volume Displaced	0.138 cu.ft., 3.92 liters
Overall Diameter	15.16", 385.1 mm
Baffle Hole Diameter	13.87", 352.3 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.25", 6.4 mm
Mounting Holes B.C.D.	14.56", 369.8 mm
Depth	6.13", 155.7 mm
Net Weight	17.6 lbs , 7.98 kg
Shipping Weight	19.8 lbs , 8.98 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

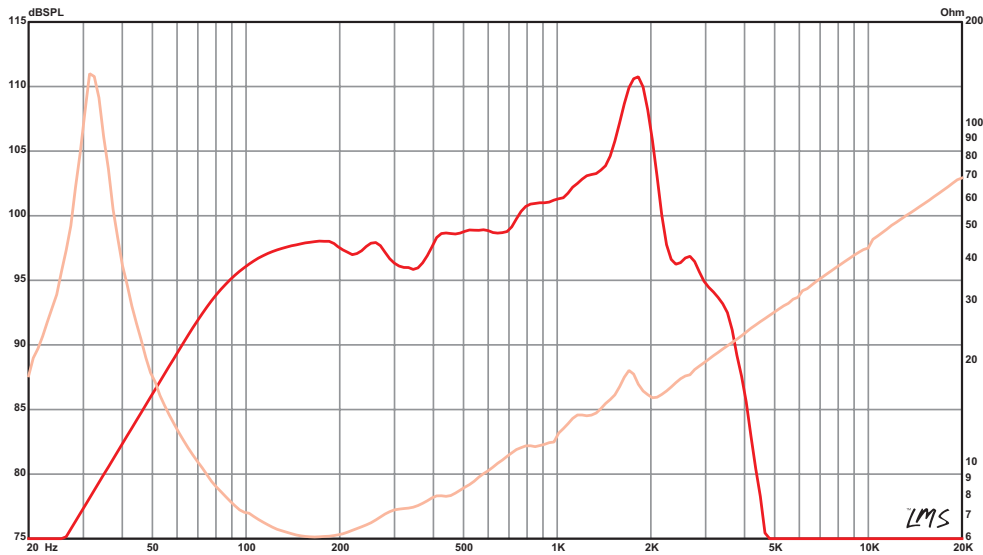

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

AMERICAN STANDARD SERIES

KAPPA-15LFA

Low frequency woofer for pro audio in a vented midbass or bass enclosure. Also suitable for bass guitar.

- 1200 W Program Power
- 15" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input checked="" type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input checked="" type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	15", 381 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	1200 W
Nominal Power	600 W
Resonance	39 Hz
Usable Frequency Range	38 Hz – 2.7 kHz
Sensitivity*	99 dB
Magnet Weight	95 oz.
Gap Height	0.375", 9.5 mm
Voice Coil Diameter	3", 76 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Polyimide former
- Ferrite magnet
- Vented core
- Pressed steel basket
- Paper cone
- Cloth cone edge
- Solid composition paper dust cap




THIELE & SMALL PARAMETERS

Fs	39 Hz
Re	5.4 Ω
Le	1.27 mH
Qms	6.08
Qes	0.41

MOUNTING INFORMATION

Recommended Enclosure Volume	N/A
Sealed	
Vented	62–193 liters, 2.2–6.8 cu.ft.
Qts	0.38
Driver Volume Displaced	0.145 cu.ft., 4.12 liters
Vas	5.62 cu.ft., 159 liters
Overall Diameter	15.16", 385.1 mm
Vd	471 cc
Baffle Hole Diameter	13.87", 352.3 mm
Cms	0.15 mm/N
Front Sealing Gasket	Yes
BL	18.6 T-M
Rear Sealing Gasket	Yes
Mms	105 grams
Mounting Holes Diameter	0.25", 6.4 mm
EBP	95
Mounting Holes B.C.D.	14.56", 369.8 mm
Xmax	5.5 mm
Depth	6.38", 162.1 mm
Sd	856.3 cm2
Net Weight	20 lbs , 9.07 kg
Xlim	10.4 mm
Shipping Weight	22.3 lbs , 10.12 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

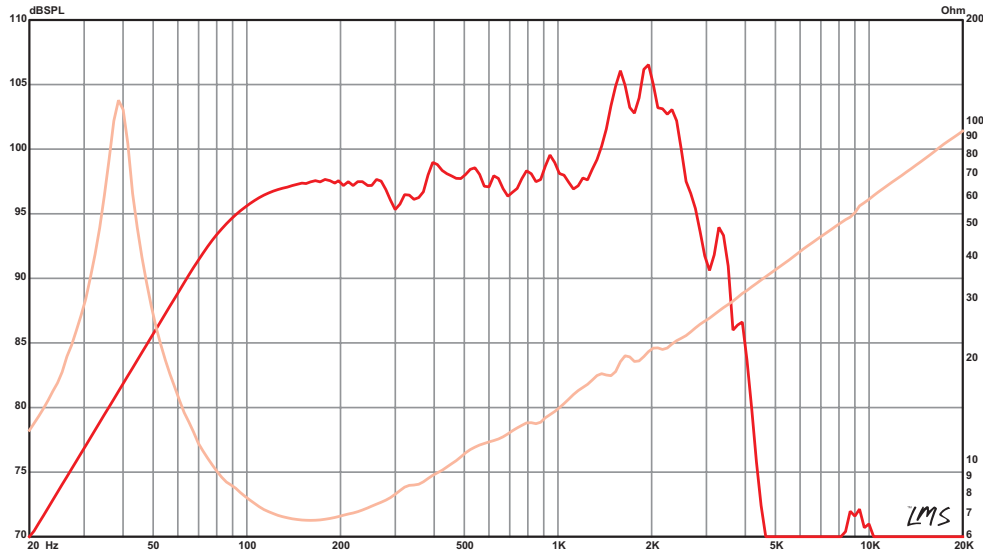

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

A NEW STANDARD IN HIGH FREQUENCY.

From high quality compression drivers to well-designed horn flares and crossovers, Eminence has an HF device to complete your loudspeaker system.

Whether for use in Eminence loaded cabinets or an upgrade to an existing system, Eminence HF drivers achieve extraordinary levels of audio performance. Add to that the same unrivaled durability you've come to expect from Eminence bass and midrange transducers, and you've got true professional value.

The Eminence assortment of horns is engineered to provide the perfect compliment to Eminence HF drivers. Each horn is manufactured from the highest quality materials to obtain a balance of strength, durability, and weight savings.

Eminence Professional Series crossovers are technically superior passive filters available in board-only configurations. Our high-pass protection circuits center around custom manufactured aerospace lamps, working as positive temperature coefficient series varistors to protect your HF device without introducing distortion.

From low-pass and high-pass filters, to two-way and three-way units with multiple crossover point options, and L-PADS for more custom HF level control, there is an Eminence crossover solution to meet your needs.

Compression Drivers	.82
Supertweeter options	.87
Horn Flares	.88
Adapters and hardware	.89
Horn/Driver Usage Guide	.89
Crossovers	.90





DAMPED
DIAMETRIC
DRIVE **D³**



N314T-8

- ☐ SCREW-ON
- ☒ BOLT-ON


SPECIFICATION

Throat Size	1.4", 35.6 mm
Nominal Impedance*	8 Ω
Minimum Impedance	6.7 ohm @ 3.7 kHz
Power Rating*	100 W (AES)
Resonance	550 Hz
DC Resistance (Re)	4.80 Ω
Usable Frequency Range	800 Hz - 20 kHz
Recommended Crossover	800 Hz / 12 dB
Sensitivity*	110.9 dB
Magnet Material	Neodymium
Magnet Weight	11 oz, 0.31 kg
Voice Coil Diameter	3.0", 76 mm
Voice Coil Former	Polyimide
Diaphragm Material	Titanium

MOUNTING INFORMATION

Overall Diameter	5.72", 145.3 mm
Driver Volume Displaced	0.023 cu.ft., 0.66 liters
Depth	2.53", 64.3 mm
Net Weight	5.1 lb, 2.3 kg
Shipping Weight	5.4 lb, 2.4 kg
Mounting Thread	N/A
Mounting Holes Diameter	4X 1/4-20
Mounting Holes B.C.D.	4.00", 101.6 mm

FREQUENCY RESPONSE & IMPEDANCE CURVE*

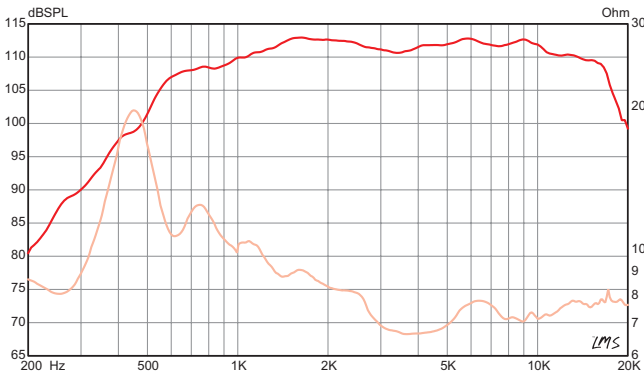

N320T-8

- ☐ SCREW-ON
- ☒ BOLT-ON


SPECIFICATION

Throat Size	2.0", 50.8 mm
Nominal Impedance*	8 Ω
Minimum Impedance	6.7 ohm @ 3.6 kHz
Power Rating*	100 W (AES)
Resonance	521 Hz
DC Resistance (Re)	4.80 Ω
Usable Frequency Range	800 Hz - 20 kHz
Recommended Crossover	800 Hz / 12 dB
Sensitivity*	110.4 dB
Magnet Material	Neodymium
Magnet Weight	11 oz, 0.31 kg
Voice Coil Diameter	3.0", 76 mm
Voice Coil Former	Polyimide
Diaphragm Material	Titanium

MOUNTING INFORMATION

Overall Diameter	5.72", 145.3 mm
Driver Volume Displaced	0.028 cu.ft., 0.81 liters
Depth	3.10", 78.7 mm
Net Weight	5.5 lb, 2.5 kg
Shipping Weight	5.8 lb, 2.6 kg
Mounting Thread	N/A
Mounting Holes Diameter	4X 1/4-20
Mounting Holes B.C.D.	4.00", 101.6 mm

FREQUENCY RESPONSE & IMPEDANCE CURVE*

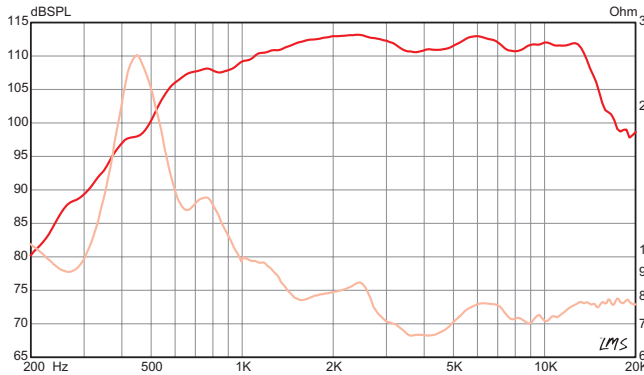

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.



F151M-8

- ☐ SCREW-ON
- ☒ BOLT-ON


SPECIFICATION

Throat Size	1.0", 25.4 mm
Nominal Impedance*	8 Ω
Minimum Impedance	5.1 ohm @ 5.5 kHz
Power Rating*	45 W (AES)
Resonance	1.03 kHz
DC Resistance (Re)	4.1 Ω
Usable Frequency Range	1.8 kHz - 20 kHz
Recommended Crossover	1.8 kHz / 12 dB
Sensitivity*	108.9 dB
Magnet Material	Ferrite
Magnet Weight	15 oz, 0.43 kg
Voice Coil Diameter	1.5", 38.1 mm
Voice Coil Former	Polyimide
Diaphragm Material	Mylar

MOUNTING INFORMATION

Overall Diameter	3.94", 100.1 mm
Driver Volume Displaced	0.007 cu.ft., 0.2 liters
Depth	1.65", 41.9 mm
Net Weight	2.5 lbs., 1.12 kg
Shipping Weight	1.8 lbs., 0.82 kg
Mounting Thread	N/A
Mounting Holes Diameter	2X 1/4-20
Mounting Holes B.C.D.	3.00", 76.2 mm

FREQUENCY RESPONSE & IMPEDANCE CURVE*

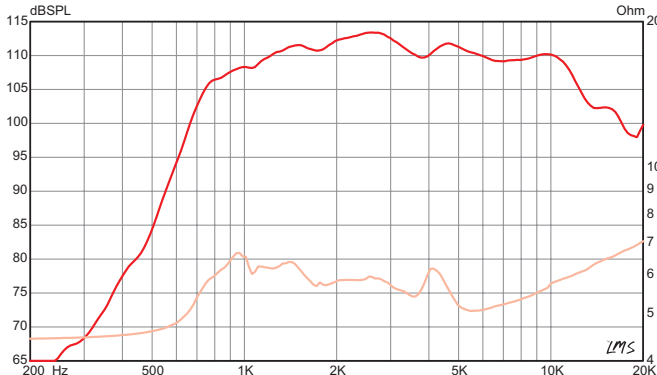

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.



N151M-8

- ☐ SCREW-ON
- ☒ BOLT-ON


SPECIFICATION

Throat Size	1.0", 25.4 mm
Nominal Impedance*	8 Ω
Minimum Impedance	5.2 ohm @ 6.2 kHz
Power Rating*	45 W (AES)
Resonance	1.24 kHz
DC Resistance (Re)	4.1 Ω
Usable Frequency Range	1.8 kHz - 27 kHz
Recommended Crossover	1.8 kHz / 12 dB
Sensitivity*	111.5 dB
Magnet Material	Neodymium
Magnet Weight	4.5 oz, 0.13 kg
Voice Coil Diameter	1.5", 38.1 mm
Voice Coil Former	Polyimide
Diaphragm Material	Mylar

MOUNTING INFORMATION

Overall Diameter	3.6", 91.4 mm
Driver Volume Displaced	0.005 cu.ft., 0.14 liters
Depth	1.23", 31.2 mm
Net Weight	1.70 lbs., 0.77 kg
Shipping Weight	1.8 lbs., 0.82 kg
Mounting Thread	N/A
Mounting Holes Diameter	2X 1/4-20
Mounting Holes B.C.D.	3.00", 76.2 mm

FREQUENCY RESPONSE & IMPEDANCE CURVE*

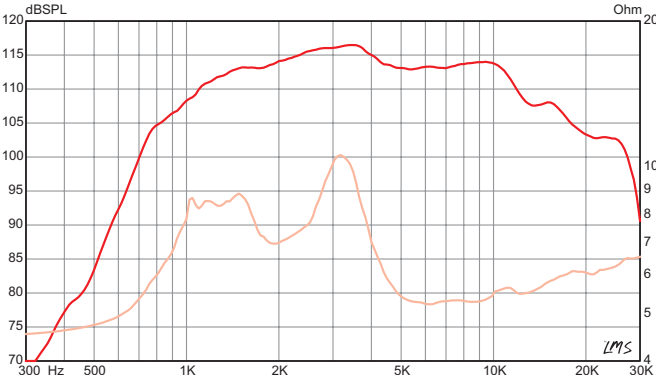



- ☒ SCREW-ON
- ☐ BOLT-ON

APT:50


SPECIFICATION

Throat Size	1.0", 25.4 mm
Nominal Impedance*	8 Ω
Minimum Impedance	7.4 ohm @ 6.1 kHz
Power Rating*	35 W (AES)
Resonance	2.1 kHz
DC Resistance (Re)	6.30 Ω
Usable Frequency Range	3.5 kHz - 20 kHz
Recommended Crossover	3.5 kHz / 12 dB
Sensitivity*	104.7 dB
Magnet Material	Ferrite
Magnet Weight	8 oz, 0.23 kg
Voice Coil Diameter	1.0", 25 mm
Voice Coil Former	Kapton
Diaphragm Material	Phenolic

MOUNTING INFORMATION

Overall Diameter	2.75", 69.9 mm
Driver Volume Displaced	0.004 cu.ft., 0.12 liters
Depth	2.53", 64.3 mm
Net Weight	1.70 lb, 0.8 kg
Shipping Weight	2.00 lb, 0.9 kg
Mounting Thread	1 3/8" 18 ext.
Mounting Holes Diameter	N/A
Mounting Holes B.C.D.	N/A

FREQUENCY RESPONSE & IMPEDANCE CURVE*

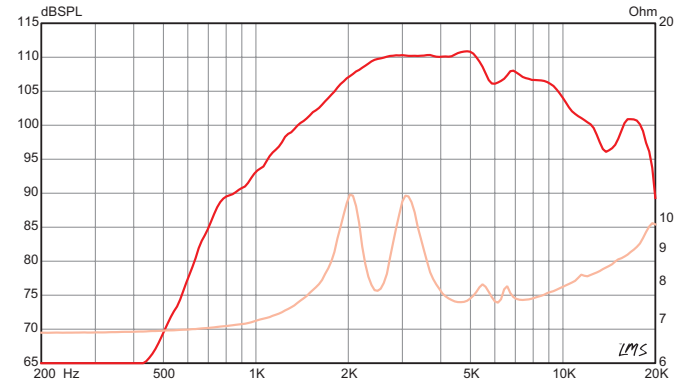

- ☒ SCREW-ON
- ☒ BOLT-ON

ASD:1001


SPECIFICATION

Throat Size	1.0", 25.4 mm
Nominal Impedance*	8 Ω
Minimum Impedance	7.7 ohm @ 3.0 kHz
Power Rating*	50 W (EIA-426A)
Resonance	592 Hz
DC Resistance (Re)	6.70 Ω
Usable Frequency Range	2.5 kHz - 20 kHz
Recommended Crossover	2.5 kHz / 18 dB
Sensitivity*	104.4 dB
Magnet Material	Ferrite
Magnet Weight	12 oz, 0.34 kg
Voice Coil Diameter	1.3", 33 mm
Voice Coil Former	Aluminum
Diaphragm Material	Titanium

MOUNTING INFORMATION

Overall Diameter	3.50", 88.9 mm
Driver Volume Displaced	0.009 cu.ft., 0.26 liters
Depth	2.45", 62.2 mm
Net Weight	1.70 lb, 0.8 kg
Shipping Weight	2.00 lb, 0.9 kg
Mounting Thread	1 3/8 in. 18 ext.
Mounting Holes Diameter	2X M6
Mounting Holes B.C.D.	3.0", 76.2 mm

FREQUENCY RESPONSE & IMPEDANCE CURVE*

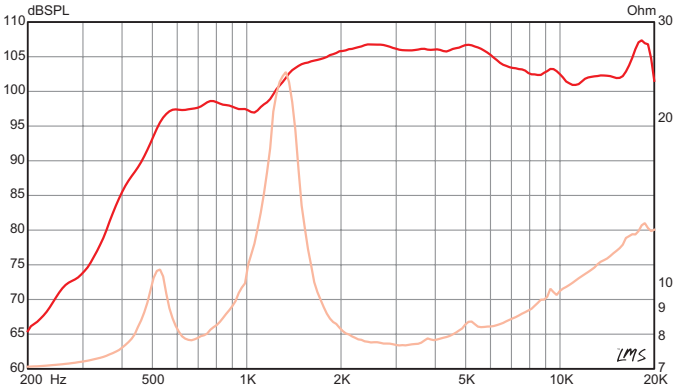

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.



- ☒ SCREW-ON
- ☒ BOLT-ON

PSD:2002


SPECIFICATION

Throat Size	1.0", 25.4 mm
Nominal Impedance*	8 or 16 Ω
Minimum Impedance	7.6 ohm @ 3.7 kHz
Power Rating*	80 W (AES)
Resonance	540 Hz
DC Resistance (Re)	6.10 Ω
Usable Frequency Range	1.2 kHz - 20 kHz
Recommended Crossover	1.2 kHz / 12 dB
Sensitivity*	106.1 dB
Magnet Material	Ferrite
Magnet Weight	34 oz, 0.96 kg
Voice Coil Diameter	2.0", 51 mm
Voice Coil Former	Polymide
Diaphragm Material	Titanium


MOUNTING INFORMATION

Overall Diameter	5.25", 133.4 mm
Driver Volume Displaced	0.018 cu.ft., 0.50 liters
Depth	2.20", 55.9 mm
Net Weight	4.70 lb, 2.1 kg
Shipping Weight	5.00 lb, 2.3 kg
Mounting Thread	1 3/8" 18 ext.
Mounting Holes Diameter	2X 1/4-20 or 3x M6
Mounting Holes B.C.D.	3.0", 76.2 mm

FREQUENCY RESPONSE & IMPEDANCE CURVE*

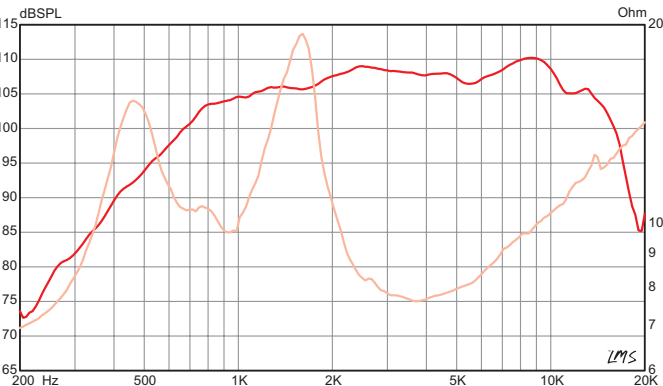

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

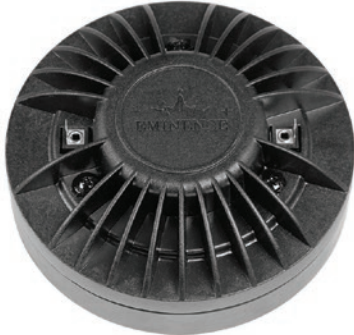

- ☒ SCREW-ON
- ☒ BOLT-ON

PSD:2013


SPECIFICATION

Throat Size	1.0", 25.4 mm
Nominal Impedance*	8 Ω
Minimum Impedance	8.7 ohm @ 5.3 kHz
Power Rating*	85 W (AES)
Resonance	438 Hz
DC Resistance (Re)	6.80 Ω
Usable Frequency Range	1.5 kHz - 20 kHz
Recommended Crossover	1.5 kHz / 12 dB
Sensitivity*	108.3 dB
Magnet Material	Ferrite
Magnet Weight	34 oz, 0.96 kg
Voice Coil Diameter	2.0", 51 mm
Voice Coil Former	Polymide
Diaphragm Material	Titanium

MOUNTING INFORMATION

Overall Diameter	5.25", 133.4 mm
Driver Volume Displaced	0.018 cu.ft., 0.51 liters
Depth	2.30", 58.4 mm
Net Weight	5.60 lb, 2.5 kg
Shipping Weight	5.90 lb, 2.7 kg
Mounting Thread	1 3/8 in. 18 ext.
Mounting Holes Diameter	2X 1/4-20
Mounting Holes B.C.D.	3.00", 76.2 mm

FREQUENCY RESPONSE & IMPEDANCE CURVE*

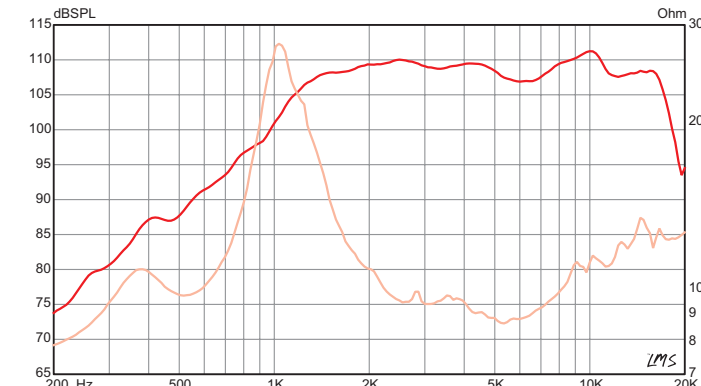

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.



PSD:3006

- ☐ SCREW-ON
- ☒ BOLT-ON


SPECIFICATION

Throat Size	2.0", 50.8 mm
Nominal Impedance*	8 Ω
Minimum Impedance	7.1 ohm @ 3.4 kHz
Power Rating*	100 W (AES)
Resonance	470 Hz
DC Resistance (Re)	4.80 Ω
Usable Frequency Range	800 Hz - 20 kHz
Recommended Crossover	800 Hz / 12 dB
Sensitivity*	108.8 dB
Magnet Material	Ferrite
Magnet Weight	80 oz, 2.27 kg
Voice Coil Diameter	3.0", 76 mm
Voice Coil Former	Polyimide
Diaphragm Material	Titanium w/ geodesic ribs for increased stiffness and break-up control.

MOUNTING INFORMATION

Overall Diameter	7.90", 200.7 mm
Driver Volume Displaced	0.048 cu.ft., 1.36 liters
Depth	3.10", 78.7 mm
Net Weight	13.20 lb, 6.0 kg
Shipping Weight	13.50 lb, 6.1 kg
Mounting Thread	
Mounting Holes Diameter	4X 1/4-20
Mounting Holes B.C.D.	4.0", 101.6 mm

FREQUENCY RESPONSE & IMPEDANCE CURVE*

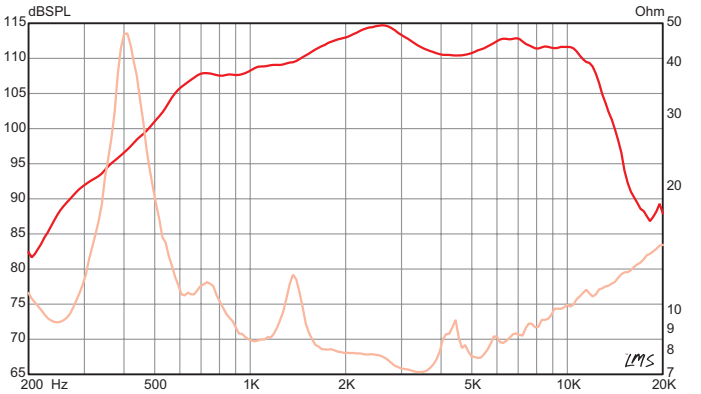

NSD:2005

- ☐ SCREW-ON
- ☒ BOLT-ON


SPECIFICATION

Throat Size	1.0", 25.4 mm
Nominal Impedance*	8 Ω
Minimum Impedance	9.0 ohm @ 5.9 kHz
Power Rating*	50 W (AES)
Resonance	578 Hz
DC Resistance (Re)	6.80 Ω
Usable Frequency Range	1.5 kHz - 20 kHz
Recommended Crossover	1.5 kHz / 12 dB
Sensitivity*	109.0 dB
Magnet Material	Neodymium
Magnet Weight	4 oz, 0.11 kg
Voice Coil Diameter	2.0", 51 mm
Voice Coil Former	Polyimide
Diaphragm Material	Titanium

MOUNTING INFORMATION

Overall Diameter	3.87", 98.3 mm
Driver Volume Displaced	0.008 cu.ft., 0.22 liters
Depth	1.75", 44.5 mm
Net Weight	1.70 lb, 0.8 kg
Shipping Weight	2.00 lb, 0.9 kg
Mounting Thread	1 3/8 in. 18 ext.
Mounting Holes Diameter	2X 1/4-20
Mounting Holes B.C.D.	3.0", 76.2 mm

FREQUENCY RESPONSE & IMPEDANCE CURVE*

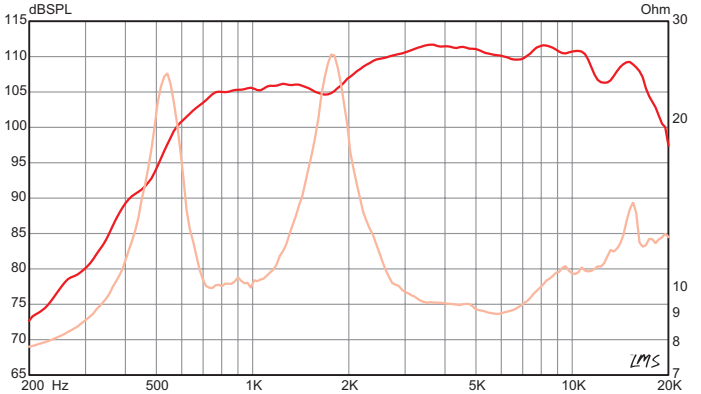

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.



These APT horns are also sold separately without the driver.

	SD28	APT:30	APT:80	APT:150	APT:200
Description	Soft dome tweeter	Horn loaded tweeter	APT:50 Driver with APT:80S Horn	APT:50 Driver with APT:150S Horn	APT:50 Driver with APT:200S Horn
Horn Type	N/A	Conical	Conical	Constant Directivity	Bi-Radial
Throat Size	N/A	1.0", 25.4 mm	1.0", 25.4 mm	1.0", 25.4 mm	1.0", 25.4 mm
Dispersion	60°	80° Conical	80° Conical	100 x 50	90 x 90
Power Rating	10 W (AES) 20 W (EIA-426B)	10 W (AES)	35 W (AES)	35 W (AES)	35 W (AES)
Nominal Impedance	4 Ω	8 Ω	8 Ω	8 Ω	8 Ω
Minimum Impedance	3.5 Ω @ 4.4 kHz	7.5 Ω @ 5 kHz	7.3 Ω @ 6 kHz	7.7 Ω @ 6 kHz	7.3 Ω @ 6.1 kHz
Sensitivity	92.5 dB	93.4 dB (116.5 max)	102.3 dB	102.4 dB	103 dB
Resonance	1.5 kHz	2.2 kHz	1.5 kHz	2.7 kHz	2.6 kHz
Usable Frequency Range	1.5 kHz – 20 kHz	3.5 kHz – 20 kHz	3.5 kHz – 20 kHz	3.5 kHz – 20 kHz	3.5 kHz – 20 kHz
Recommended Crossover	1.5 kHz / 12 dB	3.5 kHz / 12 dB	3.5 kHz / 12 dB	3.5 kHz / 12 dB	3.5 kHz / 12 dB
Voice Coil Diameter	1.0", 25.4 mm	0.5", 12.7 mm	1.0", 25.4 mm	1.0", 25.4 mm	1.0", 25.4 mm
Voice Coil Former	Aluminum	Aluminum	Kapton	Kapton	Kapton
Diaphragm Material	Silk	Mylar	Phenolic	Phenolic	Phenolic
Magnet Composition	Neodymium	Ferrite	Ferrite	Ferrite	Ferrite
Width/Height/Depth	1.0" height, 1.48" width 25.4 x 37.6 mm	2.61 x 2.61 x 1.78 in., 66.2 x 66.2 x 45.2 mm	3.40 x 3.40 x 3.70 in., 86.4 x 86.4 x 94.0 mm	7.60 x 4.50 x 5.10 in., 193.0 x 114.3 x 129.5 mm	5.90 x 6.00 x 6.30 in., 149.9 x 152.4 x 160.0 mm
Cut-out	Rear mounting hole diameter 1 x M4 x 0.7	2.31 x 2.31 in., 59 x 59 mm	3.15 x 3.15 in., 80 x 80 mm	6.7 x 3.4 in., 170 x 86 mm	4.3 x 4.3 in., 109 x 109 mm
Weight	0.1 lbs., 0.05 kg	0.4 lb., 0.18 kg	1.80 lb., 0.82 kg	1.90 lb., 0.86 kg	2.50 lb., 1.13 kg
Horn Material	N/A	ABS	ABS	ABS	ABS

HORN FLARES AND WAVEGUIDES

In addition to the horn flares listed below, the APT horns shown on page 87 are available separately for use with any driver with 1 3/8" ext. thread.



	WG10	LA-WG10	LA-WG14	BH410
Type	Waveguide	Line Array Waveguide	Line Array Waveguide	Exponential
Throat Size	1.0", 25.4 mm	1.0", 25.4 mm	1.4", 35.6 mm	1.0", 25.4 mm
Attachment Method	Bolt-on	Bolt-on	Bolt-on	Screw-on
Dispersion	70 x 60	140 X 15	140 x 15	60 x 60
Recommended Crossover	1.4 kHz	1.8 kHz	1 kHz	1.2 kHz
Width/Height/Depth	11.6" x 8.6" x 4.5", 295 x 218 x 114 mm	3.5" x 4.4" x 4.4", 89 x 112 x 112 mm	5.2" x 6.4" x 7.1", 131 x 163 x 181 mm	5.59" x 5.59" x 4.38", 142 x 142 x 111.3 mm
Cut-out	10.4 x 7.4", 264 x 188 mm	1 x 4", 25.4 x 102 mm	1 x 6", 25.4 x 152.4 mm	3.56 x 3.56", 90.4 x 90.4 mm
Weight	1.10 lb., 0.50 kg	0.96 lb., 0.43 kg	2.5 lb., 1.13 kg	0.35 lb., 0.16 kg
Material	ABS	Aluminum	Aluminum	ABS




	H290S	H14EA	H2EA	SST1
Type	Exponential	Exponential	Exponential	Constant Directivity
Throat Size	1.0", 25.4 mm	1.4", 35.6 mm	2.0", 50.8 mm	1.0", 25.4 mm
Attachment Method	Screw-on or Bolt-on (H290B)	Bolt-on	Bolt-on	Bolt-on
Dispersion	90 x 40	60 X 40	60 x 40	90 x 40
Recommended Crossover	1.0 kHz	600 Hz	700 Hz	1.0 kHz
Width/Height/Depth	11.7" x 6.6" x 6.6", 297.2 x 167.6 x 167.6 mm	12.60" x 7.50" x 7.90", 320 x 190.5 x 200.7 mm	12.4" x 7.3" x 6.1", 315 x 185.4 x 154.9 mm	9.8" x 7.7" x 5.2", 249 x 196 x 132 mm
Cut-out	9.7 x 4.9", 246 x 124 mm	11.3 x 6.1", 287 x 155 mm	11.3 x 6.3", 287 x 160 mm	8.5" x 6.4", 216 x 163 mm
Weight	1.10 lb., 0.50 kg	4.80 lb., 2.18 kg	4.90 lb., 2.22 kg	1.80 lb., 0.82 kg
Material	ABS	Aluminum	Aluminum	ABS

ADAPTERS AND HARDWARE

DRIVER AND HORN COMPATIBILITY			
DRIVER	HORN OPTION	DRIVER	HORN OPTION
N314T-8	H14EA	ASD:1001S NSD:2005S	APT:150S*
	LA-WG14		APT200S
N320T-8 PSD:3006	H2EA		H290S
			BH410
APT:50	APT:80S		SST1 **
	APT:150S		WG-10 **
	APT:200S		LA-WG10 **
	BH410	ASD:1001B N151M-8 NSD:2005B PSD:2002B PSD:2013B	APT:150S *** (Bracing recommended with PSD drivers)
	H290S		APT200S *** (Bracing recommended with PSD drivers)
	SST1 **		H290B
PSD:2002S PSD:2013S	WG-10 **		SST1
	LA-WG10 **		WG10
			LA-WG10
	APT:200S*		
	H290S*		

* Driver bracing recommended ** S2B Adapter required *** B2S Adapter required



HA1-14
Aluminum adapter allows you to pair a 1" bolt-on horn or driver with a 1.4" bolt-on device.



HA14-2
Use this aluminum adapter to pair a 1.4" bolt-on horn or driver with a 2" bolt-on device.



B2S-A
Aluminum adapter converts bolt-on driver to accept a screw-on horn. 2x 1/4-20 or 3x M6 driver to 1 3/8" 18 thread horn.



S2B-A
Aluminum adapter converts screw-on driver to accept a bolt-on horn. 1 3/8" 18 ext. driver to 2x 1/4-20 or 3x M6 thread horn.

TOP HAT-CH

Adjustable-angle speaker stand receptacle for loudspeaker boxes. Vertical angle can be adjusted in 4° increments to +/- 18°. Fits SPS56B and most other standard speaker stands. Internal Ø 36mm. Max weight 55.1 lbs., 25 kg. Black polyamide. Patent pending.

ISO-5 5" ISOLATION BOX

The ISO-5 isolation box provides a quick and cost-effective solution for chambering a 5" open-frame speaker. The molded ABS construction offers a durable and lightweight option for eliminating interference from larger woofers mounted in the same enclosure. Ideal for pro audio, MI, installed sound, and car audio applications.

MATERIAL	ABS
WEIGHT	0.2 lbs, 0.09 kg
DEPTH	3.25", 82.6 mm
MAJOR DIAMETER	5.31", 135.0 mm
FLAT TO FLAT DIAMETER	4.80", 121.9 mm
CUT-OUT	4.56", 115.8 mm

CROSSOVERS

From low-pass and high-pass filters, to two-way and three-way units with multiple crossover point options, and L-PADs for more custom HF level control, there is an Eminence crossover solution to meet your needs.

	MODEL	TYPE	CROSSOVER FREQUENCY	SLOPE	IMPEDANCE	POWER HANDLING
	PXB:250	Low-pass	250 Hz	12 dB/octave Butterworth	8 Ω	600 W
	PXB:500	Low-pass	500 Hz	12 dB/octave Butterworth	8 Ω	600 W
	PXB:1K6	High-pass	1.6 kHz	18 dB/octave Butterworth	8 Ω	400 W
	PXB:1K8	High-pass	1.8 kHz	18 dB/octave Butterworth	8 Ω	400 W
	PXB:3K5	High-pass	3.5 kHz	18 dB/octave Butterworth	8 Ω	400 W
	PXB:5K0	High-pass	5 kHz	18 dB/octave Butterworth	8 Ω	400 W
	PXB2:800	2-way	800 Hz	12 dB/octave LP 18 dB/octave HP Butterworth	8 Ω	400 W
	PXB2:1k6	2-way	1.6 kHz	12 dB/octave LP 18 dB/octave HP Butterworth	8 Ω	400 W
	PXB2:2K5 CX	2-way	2.5 kHz	12 dB/octave LP 18 dB/octave HP Custom	8 Ω	250 W
	PXB2:3k5	2-way	3.5 kHz	12 dB/octave LP 18 dB/octave HP Butterworth	8 Ω	400 W
	PXB2:5K0	2-way	5 kHz	12 dB/octave LP 18 dB/octave HP Butterworth	8 Ω	400 W
	PXB3:3K5	3-way	500 Hz / 3.5 kHz	12 dB/octave LP 6 dB/octave MP 18 dB/octave HP Butterworth	8 Ω	400 W
	PXB3:5k0	3-way	500 Hz / 5 kHz	12 dB/octave LP 6 dB/octave MP 18 dB/octave HP Butterworth	8 Ω	400 W

PX-BULB



Replacement bulb

PX-LPAD



Recommended for LF and HF level matching unless using our coax crossover PXB2:2k5CX.

Type: L-Pad
Cabinet Ready: Yes
Impedance: 8 ohm
Power Handling: 100 W

ERIC JOHNSON



PHOTO © MAX CRACE

FROM VINTAGE
TO MODERN
AND EVERY TONE IN BETWEEN

From rock, twang, to British spank, vintage or modern, Eminence has a model to match your style. You can find Eminence inside the world’s premier guitar and bass amplifier brands, backing up the hardest working session artists and touring professionals in the music industry. Eminence is America’s premier speaker manufacturer, with a history of innovation and quality. Designed and assembled in the USA with a 7-year warranty*, Eminence is the choice of guitarists the world over.



SIGNATURE
SERIES

Our Signature series is a reflection of our heritage of designing custom speakers for the industry’s most respected amplifier and cabinet brands. Offering versatility and a unique range of tones, make one of these models part of YOUR signature sound.

PAGE 94



LEGEND
SERIES

This long-standing line of guitar speakers didn’t get its name by accident. Known for their power, reliability and value, these rock-solid speakers have backed legendary players in legendary venues. If you want to sound like a legend, play one.

PAGE 102



PATRIOT
SERIES

Whatever the sound, from the bayou to the blues, the Patriot series has a speaker that can deliver it. From thumping bass, mellow mid-tones or soaring highs, Patriot speakers offer different balances of that spectrum with a wide selection of models.

PAGE 112



REDCOAT
SERIES

The Redcoat series captures some of the most well-known amp tones ever recorded and revered for decades. Ranging from tight and bright to growling grit, there’s a Redcoat model that will bring classic sounds alive for today’s players.

PAGE 127



BASS
GUITAR

Look inside most name brand bass amps and you’ll find custom designed Eminence bass guitar speakers. The people who make them know what bass players want. From fast and tight to fat and round, Eminence speakers give you the tone to hold it all together.

PAGE 139

*Warranty policy may vary outside of the continental United States and Canada. Check with your local distributor for warranty details.

WHEELHOUSE 150

The warmth of hemp meets the power and responsiveness of neo in this versatile 12” speaker. Touch-sensitive and balanced, the WheelHouse delivers warm, smooth tone throughout the entire spectrum, allowing you to utilize your amp controls to shape your sound. It handles pedals and amp EQ with ease. Go from country to fusion to blues and make it sound like it’s right in ***your*** wheelhouse.


12” | 150 WATTS
8 Ω



“Today’s in-demand session artists and sidemen have to be chameleons. We need to seamlessly blend in stylistically and tonally with whatever type of music is being recorded. This new speaker I helped Eminence develop lets me use my amp and pedals to dial in any tone I’m after, and handles anything I throw at it.” – Andy Wood / Session Artist / Touring Professional

SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	12", 305 mm	Enclosure Type		Edge wound aluminum voice coil	
Nominal Impedance*	8 Ω	Closed Back	Acceptable	Polyimide former	
Power Rating*	150 W	Open Back	Acceptable	Neodymium magnet	
Resonance (Fs)	82 Hz	Driver Volume Displaced	0.06 cu.ft., 1.8 liters	Vented core	
Usable Frequency Range	80 Hz – 3.8 kHz	Overall Diameter	12.17", 309.1 mm	Pressed steel basket	
Sensitivity*	101.4 dB	Baffle Hole Diameter	11.13", 282.7 mm	Hemp cone	
DC Resistance (Re)	7.5 Ω	Depth	6.25", 158.8 mm	Paper cone edge	
Qts	0.43	Front Sealing Gasket	Yes	Treated paper dust cap	
Magnet Weight	11 oz.	Rear Sealing Gasket	Yes		
Gap Height	0.38", 9.5 mm	Mounting Holes Diameter	0.24", 6.1 mm		
Voice Coil Diameter	2.5", 63.5 mm	Mounting Holes B.C.D.	11.75", 298.5 mm		
		Net Weight	6.6 lbs , 3.0 kg		
		Shipping Weight	8.7 lbs , 3.95 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

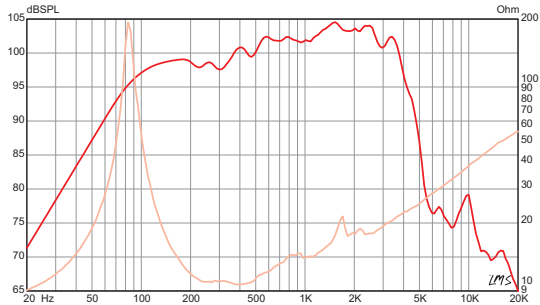

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

WHEELHOUSE 200


A 15” version of our 12” WheelHouse 150, this touch-sensitive and balanced hemp cone speaker delivers warm, smooth tone throughout the entire spectrum, allowing you to utilize your amp controls to shape your sound. It handles pedals and amp EQ with ease.

15” | 200 WATTS
8 Ω



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	15", 381 mm	Enclosure Type		Edge wound aluminum voice coil	
Nominal Impedance*	8 Ω	Closed Back	Acceptable	Polyimide former	
Power Rating*	200 W	Open Back	Acceptable	Neodymium magnet	
Resonance (Fs)	50.67 Hz	Driver Volume Displaced	0.13 cu.ft., 3.62 liters	Vented core	
Usable Frequency Range	60 Hz – 3.5 kHz	Overall Diameter	15.16", 385.1 mm	Pressed steel basket	
Sensitivity*	101.5 dB	Baffle Hole Diameter	13.87", 352.3 mm	Hemp cone	
DC Resistance (Re)	7.5 Ω	Depth	5.63", 142.9 mm	Paper cone edge	
Qts	0.45	Front Sealing Gasket	Yes	Treated paper dust cap	
Magnet Weight	11 oz.	Rear Sealing Gasket	Yes		
Gap Height	0.38", 9.5 mm	Mounting Holes Diameter	0.25", 6.35 mm		
Voice Coil Diameter	2.5", 63.5 mm	Mounting Holes B.C.D.	14.56", 369.8 mm		
		Net Weight	8.2 lbs , 3.7 kg		
		Shipping Weight	10.4 lbs , 4.7 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

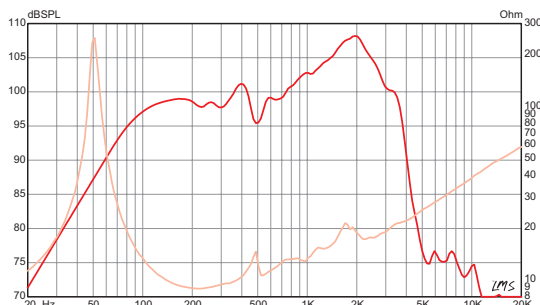

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

PAUL FRANKLIN SIGNATURE

PF-350

Offering complete tonal balance from top to bottom, this attack-sensitive and powerful 12” model was co-developed with veteran session and touring pro Paul Franklin. With headroom to spare, the PF-350’s tone transfers from low volume to very loud with warmth and clarity, making it ideal for pedal steelers and 6-stringers alike.


12” | 350 WATTS
8 Ω



“I finally have a speaker with complete balance, from highs to lows, where one frequency never dominates another. It gives me the flexibility to use my amp to dial in any type of sound while faithfully delivering beautiful tone at any volume.” – Paul Franklin

SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION
Nominal Basket Diameter	12", 305 mm	Enclosure Type		Edge wound aluminum voice coil
Nominal Impedance*	8 Ω	Closed Back	Acceptable	Polyimide former
Power Rating*	350 W	Open Back	Acceptable	Ferrite magnet
Resonance (Fs)	62.6 Hz	Driver Volume Displaced	0.1 cu.ft., 2.9 liters	Undercut core
Usable Frequency Range	65 Hz – 3.5 kHz	Overall Diameter	12.29", 312.2 mm	Die-cast aluminum basket
Sensitivity*	99 dB	Baffle Hole Diameter	11.06", 280.9 mm	Paper cone
DC Resistance (Re)	7.41 Ω	Depth	5.0", 127 mm	Cloth edge
Qts	0.42	Front Sealing Gasket	Yes	Paper dust cap
Magnet Weight	109 oz.	Rear Sealing Gasket	Yes	
Gap Height	0.285", 7.24 mm	Mounting Holes Diameter	0.27", 6.9 mm	
Voice Coil Diameter	4", 101.6 mm	Mounting Holes B.C.D.	11.69", 296.9 mm	
		Net Weight	21.5 lbs , 9.75 kg	
		Shipping Weight	23.7 lbs , 10.75 kg	

FREQUENCY RESPONSE & IMPEDANCE CURVE*

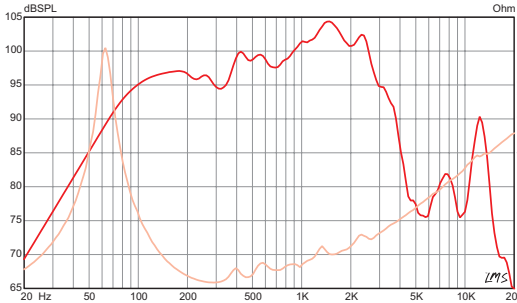

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

TRAVIS TOY SIGNATURE

DOUBLE-T 12

Rated at 300 watts, the Travis Toy Signature Double-T 12 pedal steel guitar speaker features a tight low end, a midrange bite that can cut through a mix, and detailed high end without being too bright. Travis worked closely with the engineers at Eminence to achieve these characteristics and even managed to pack them all into a 12” speaker that weighs just over 7 lbs.


12” | 300 WATTS
8 Ω



“This speaker directly addresses many of the issues I’ve had with existing speaker designs for my entire career. I feel that it’s the perfect modern steel guitar speaker.” – Travis Toy

SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION
Nominal Basket Diameter	12", 305 mm	Enclosure Type		Copper voice coil
Nominal Impedance*	8 Ω	Closed Back	Acceptable	Polyimide former
Power Rating*	300 W	Open Back	Acceptable	Neodymium magnet
Resonance (Fs)	53 Hz	Driver Volume Displaced	0.09 cu.ft., 2.54 liters	Vented core
Usable Frequency Range	50 Hz – 3.8 kHz	Overall Diameter	12.38", 314.5 mm	Die-cast aluminum basket
Sensitivity*	100.2 dB	Baffle Hole Diameter	11.04", 280.4 mm	Paper cone
DC Resistance (Re)	5.6 Ω	Depth	5.63", 143 mm	Cloth edge
Qts	0.3	Front Sealing Gasket	Yes	Paper dust cap
Magnet Weight	11 oz.	Rear Sealing Gasket	Yes	
Gap Height	0.36", 9.1 mm	Mounting Holes Diameter	0.28", 7.1 mm	
Voice Coil Diameter	3", 76 mm	Mounting Holes B.C.D.	11.62", 295.2 mm	
		Net Weight	7.1 lbs , 3.22 kg	
		Shipping Weight	8.7 lbs , 3.95 kg	

FREQUENCY RESPONSE & IMPEDANCE CURVE*

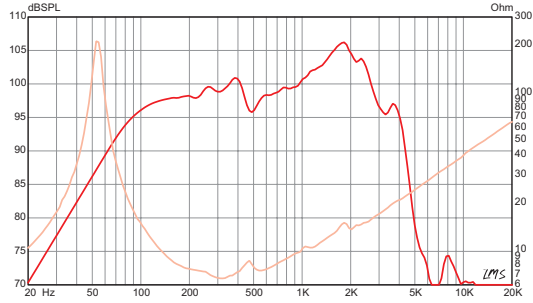

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

ERIC JOHNSON SIGNATURE

EJ-1240

Eric Johnson, George Alessandro and Eminence have teamed up once again to reinvent vintage tone. Through a reformulated paper cone and optimized basket design, the 40 watt EJ-1240 offers vintage Alnico tone with tight, punchy lows, nice lower-mid growl, crisp upper-mids, and very controlled, articulate, and open highs.


12" 40 WATTS
8 OR 16 Ω



“The new design concentrates on achieving a balanced EQ spectrum so that this speaker will sound good for clean tones, as well as semi-distorted and full for high gain lead tones.” – Eric Johnson

SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	12", 305 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	8 or 16 Ω	Closed Back	Acceptable	Paper former	
Power Rating*	40 W	Open Back	Acceptable	Alnico magnet	
Resonance (Fs)	75 Hz	Driver Volume Displaced	0.079 cu.ft., 2.24 liters	Non-vented core	
Usable Frequency Range	80 Hz – 5 kHz	Overall Diameter	12.17", 309.1 mm	Pressed steel basket	
Sensitivity*	100.7 dB	Baffle Hole Diameter	11.13", 282.7 mm	Paper cone	
DC Resistance (Re)	7 Ω	Depth	6.25", 158.8 mm	Paper cone edge	
Qts	0.53	Front Sealing Gasket	Yes	Zurette dust cap	
Magnet Weight	35 oz.	Rear Sealing Gasket	No		
Gap Height	0.31", 8 mm	Mounting Holes Diameter	0.24", 6.1 mm		
Voice Coil Diameter	1.75", 44 mm	Mounting Holes B.C.D.	11.75", 298.5 mm		
		Net Weight	8.4 lbs , 3.81 kg		
		Shipping Weight	10.2 lbs , 4.63 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

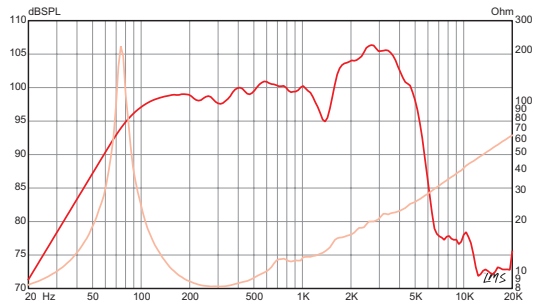

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

JOSH SMITH SIGNATURE

JS-1250

Respected as much for his tone as his guitar skills, Josh Smith’s concept for the ultimate guitar speaker involved combining the lows of the Eminence Tonespotter, the clean highs of the Wizard, and the natural grit and sparkle of the Red Fang alnico. The result is an extremely versatile speaker with vintage tone and the ability to handle the power of modern amps.


12" 50 WATTS
8 Ω



“Ultimately I was looking for something that could work in any application, from clean Fender tones, as well as dirty Vox tones. I asked Eminence to combine several qualities of my favorite speakers into one, and they knocked it out of the park. I use it in all my amps.” – Josh Smith

SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	12", 305 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	8 Ω	Closed Back	Acceptable	Nomex former	
Power Rating*	50 W	Open Back	Acceptable	Ferrite magnet	
Resonance (Fs)	91.8 Hz	Driver Volume Displaced	0.07 cu.ft., 2.0 liters	Stamped steel basket	
Usable Frequency Range	80 Hz – 5.2 kHz	Overall Diameter	12.17", 309.12 mm	Full molded paper cone	
Sensitivity*	101.4 dB	Baffle Hole Diameter	11.13", 282.7 mm	Zurette dust cap	
DC Resistance (Re)	6.42 Ω	Depth	5.23", 132.8 mm		
Qts	0.61	Front Sealing Gasket	Yes		
Magnet Weight	38 oz.	Rear Sealing Gasket	No		
Gap Height	0.31", 8 mm	Mounting Holes Diameter	0.24", 6.1 mm		
Voice Coil Diameter	1.75", 44.5 mm	Mounting Holes B.C.D.	11.75", 298.5 mm		
		Net Weight	8.0 lbs , 3.95 kg		
		Shipping Weight	9.8 lbs , 4.45 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

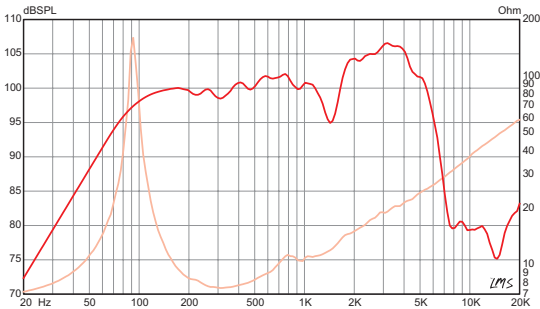

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

GEORGE ALESSANDRO SIGNATURE

GA 10-SC64


Tones of 1964 still ring true in this vintage voiced 10 inch speaker by amp guru George Alessandro. Very balanced with dynamic character, this ceramic 10 inch speaker offers tight, punchy tone with nice warmth, richness, and sparkling highs.

10” | 20 WATTS
8 Ω



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	10", 254 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	8 Ω	Closed Back	Acceptable	Paper former	
Power Rating*	20 W	Open Back	Acceptable	Ferrite magnet	
Resonance (Fs)	100 Hz	Driver Volume Displaced	0.027 cu.ft., 0.77 liters	Non-vented core	
Usable Frequency Range	100 Hz – 5.5 kHz	Overall Diameter	10.11", 256.8 mm	Pressed steel basket	
Sensitivity*	98.2 dB	Baffle Hole Diameter	9.13", 231.9 mm	Paper cone	
DC Resistance (Re)	7.58 Ω	Depth	3.93", 99.8 mm	Paper cone edge	
Qts	1.28	Front Sealing Gasket	Yes	Solid composition felt dust cap	
Magnet Weight	15 oz.	Rear Sealing Gasket	N/A		
Gap Height	0.25", 6.4 mm	Mounting Holes Diameter	0.22", 5.6 mm		
Voice Coil Diameter	1", 25 mm	Mounting Holes B.C.D.	9.6", 243.8 mm		
		Net Weight	3.3 lbs , 1.5 kg		
		Shipping Weight	4.4 lbs , 2 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

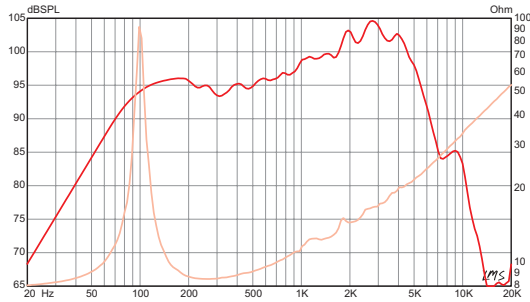

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

GEORGE ALESSANDRO SIGNATURE

GA-SC64


Tones of 1964 still ring true in this vintage voiced speaker by seasoned amp guru George Alessandro. Well-balanced from top to bottom, the GA-SC64’s warm, dynamic character lends itself to vintage amps as well as modern gain and distortion. The traditional build materials offer warmth, dynamics, low note articulation and proper distorted harmonic content layering.

12” | 40 WATTS
8 OR 16 Ω



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	12", 305 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	8 or 16 Ω	Closed Back	Acceptable	Paper former	
Power Rating*	40 W	Open Back	Acceptable	Ferrite magnet	
Resonance (Fs)	88 Hz	Driver Volume Displaced	0.071 cu.ft., 2 liters	Non-vented core	
Usable Frequency Range	80 Hz – 5.3 kHz	Overall Diameter	12.17", 309.1 mm	Pressed steel basket	
Sensitivity*	100.5 dB	Baffle Hole Diameter	11.13", 282.7 mm	Paper cone	
DC Resistance (Re)	7.63 Ω	Depth	5.13", 130.2 mm	Paper cone edge	
Qts	0.58	Front Sealing Gasket	Yes	Solid composition felt dust cap	
Magnet Weight	38 oz.	Rear Sealing Gasket	No		
Gap Height	0.31", 8 mm	Mounting Holes Diameter	0.24", 6.1 mm		
Voice Coil Diameter	1.75", 44 mm	Mounting Holes B.C.D.	11.75", 298.5 mm		
		Net Weight	7.5 lbs , 3.4 kg		
		Shipping Weight	8.4 lbs , 3.81 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

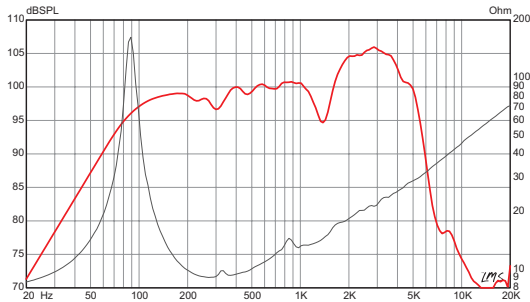

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

TOMO FUJITA SIGNATURE

TF-1250

A touch sensitive, bright and chimey vintage American tone with tight, punchy lows and nice, even mids. The 30 oz. ceramic magnet provides lower efficiency, which allows you to find the amp’s sweet spot at lower volumes.


12” | 50 WATTS
8 Ω



“I feel lucky to have worked with Eminence since 2002, and my signature speaker is very special for me to achieve great quality vintage tone using modern technology.” – Tomo Fujita

SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	12", 305 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	8 Ω	Closed Back	Acceptable	Polyimide former	
Power Rating*	50 W	Open Back	Acceptable	Ferrite magnet	
Resonance (Fs)	95 Hz	Driver Volume Displaced	0.068 cu.ft., 1.93 liters	Non-vented core	
Usable Frequency Range	80 Hz – 4.4 kHz	Overall Diameter	12.17", 309.1 mm	Pressed steel basket	
Sensitivity*	101.3 dB	Baffle Hole Diameter	11.13", 282.7 mm	Full molded paper cone	
DC Resistance (Re)	7.23 Ω	Depth	4.97", 126.2 mm	Paper cone edge	
Qts	0.88	Front Sealing Gasket	Yes	Paper dust cap	
Magnet Weight	30 oz.	Rear Sealing Gasket	No		
Gap Height	0.31", 8 mm	Mounting Holes Diameter	0.24", 6.1 mm		
Voice Coil Diameter	1.5", 38 mm	Mounting Holes B.C.D.	11.75", 298.5 mm		
		Net Weight	6.6 lbs , 2.99 kg		
		Shipping Weight	8.6 lbs , 3.9 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

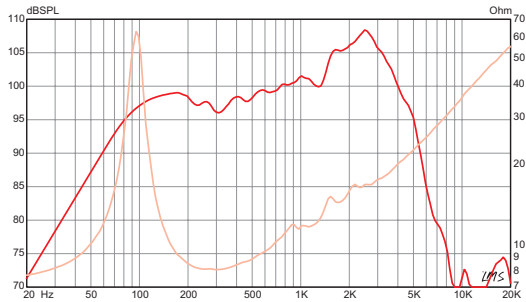

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

PETE ANDERSON SIGNATURE

HEMPDOG 12

Multi-platinum, Grammy Award-winning producer/guitarist Pete Anderson wanted to combine the tonal characteristics from two of his favorite Eminence speakers into a single 12” model. The HempDog 12 borrows the warmth from the Cannabis Rex, and the neutral, clear tone from the Legend EM12.


12” | 150 WATTS
8 Ω



“The creation of the HempDog has exceeded my expectations. It has the hi-fidelity I require plus the warmth of hemp, an outstanding combination that covers all genres of music.” – Pete Anderson

SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	12", 305 mm	Enclosure Type		Edge Wound Aluminum	
Nominal Impedance*	8 Ω	Closed Back	Acceptable	Polyimide former	
Power Rating*	150 W	Open Back	Acceptable	Ferrite	
Resonance (Fs)	69 Hz	Driver Volume Displaced	0.003 cu.ft., 0.09 liters	Vented core	
Usable Frequency Range	80 Hz – 3.8 kHz	Overall Diameter	12.38", 314.5 mm	Die-cast aluminum basket	
Sensitivity*	102.3 dB	Baffle Hole Diameter	11.07", 281.2 mm	Hemp cone	
DC Resistance (Re)	6.55 Ω	Depth	5.38", 136.7 mm	Paper cone edge	
Qts	0.35	Front Sealing Gasket	Yes	Paper dust cap	
Magnet Weight	80 oz.	Rear Sealing Gasket	Yes		
Gap Height	0.37", 9.5 mm	Mounting Holes Diameter	0.26", 6.6 mm		
Voice Coil Diameter	2.5", 64 mm	Mounting Holes B.C.D.	11.57", 293.9 mm		
		Net Weight	16.3 lbs , 7.39 kg		
		Shipping Weight	18 lbs , 8.16 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

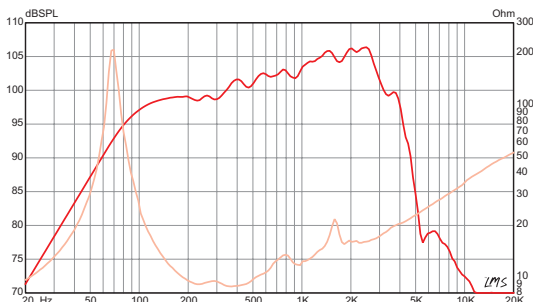

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

LEGEND GUITAR SERIES

LEGEND 1058


The Eminence Legend 1058 guitar speaker takes classic tone a step further. Vintage American tone with punchy lows and warm, smooth, bluesy mids and highs. Fatter Legend 1028K tone with more depth.

10” | 75 WATTS
8 OR 16 Ω



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	10", 254 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	8 or 16 Ω	Closed Back	Acceptable	Polyimide former	
Power Rating*	75 W	Open Back	Acceptable	Ferrite magnet	
Resonance (Fs)	97 Hz	Driver Volume Displaced	0.033 cu.ft., 0.93 liters	Non-vented core	
Usable Frequency Range	100 Hz – 5 kHz	Overall Diameter	10.11", 256.8 mm	Pressed steel basket	
Sensitivity*	98.7 dB	Baffle Hole Diameter	9.13", 231.9 mm	Paper cone	
DC Resistance (Re)	7.49 Ω	Depth	4.1", 104.1 mm	Paper cone edge	
Qts	1.13	Front Sealing Gasket	Yes	Solid composition felt dust cap	
Magnet Weight	16 oz.	Rear Sealing Gasket	Yes		
Gap Height	0.25", 6.4 mm	Mounting Holes Diameter	0.23", 5.8 mm		
Voice Coil Diameter	1.5", 38 mm	Mounting Holes B.C.D.	9.6", 243.8 mm		
		Net Weight	4.4 lbs , 2 kg		
		Shipping Weight	5.4 lbs , 2.45 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

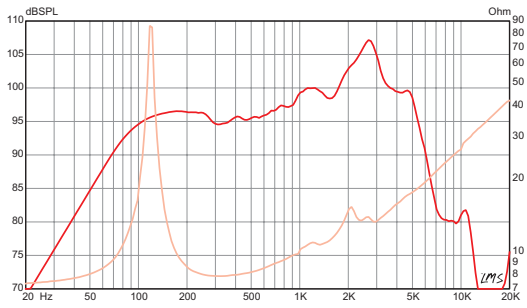

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

LEGEND GUITAR SERIES

LEGEND 1028K


The Eminence Legend 1028K guitar speaker is a classic stage fixture. Vintage American tone with moderate, but tight, percussive lows and extended highs. Hard-working under the bright lights.

10” | 35 WATTS
8 Ω



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	10", 254 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	8 Ω	Closed Back	Acceptable	Polyimide former	
Power Rating*	35 W	Open Back	Acceptable	Alnico magnet	
Resonance (Fs)	95 Hz	Driver Volume Displaced	0.027 cu.ft., 0.77 liters	Non-vented core	
Usable Frequency Range	100 Hz – 5 kHz	Overall Diameter	10.11", 256.8 mm	Pressed steel basket	
Sensitivity*	97.4 dB	Baffle Hole Diameter	9.13", 231.9 mm	Paper cone	
DC Resistance (Re)	5.8 Ω	Depth	4.8", 121.9 mm	Paper cone edge	
Qts	1.47	Front Sealing Gasket	Yes	Solid composition felt dust cap	
Magnet Weight	6 oz.	Rear Sealing Gasket	N/A		
Gap Height	0.25", 6.4 mm	Mounting Holes Diameter	0.22", 5.6 mm		
Voice Coil Diameter	1", 25 mm	Mounting Holes B.C.D.	9.6", 243.8 mm		
		Net Weight	2.9 lbs , 1.32 kg		
		Shipping Weight	4 lbs , 1.81 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

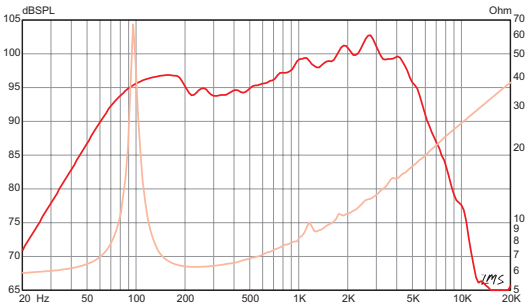

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

LEGEND GUITAR SERIES

LEGEND EM12


A high power 12 inch guitar speaker featuring ultra-clean tone with big, round, punchy lows and warm, smooth mids and highs. A more neutral tone so you can hear more of your amp and guitar.

12" | 200 WATTS
8 Ω



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	12", 305 mm	Enclosure Type		Edge wound aluminum voice coil	
Nominal Impedance*	8 Ω	Closed Back	Acceptable	Polyimide former	
Power Rating*	200 W	Open Back	Acceptable	Ferrite magnet	
Resonance (Fs)	49 Hz	Driver Volume Displaced	0.09 cu.ft., 2.55 liters	Vented core	
Usable Frequency Range	60 Hz – 4.9 kHz	Overall Diameter	12.38", 314.5 mm	Die cast aluminum basket	
Sensitivity*	101.1 dB	Baffle Hole Diameter	11.07", 281.2 mm	Paper cone	
DC Resistance (Re)	6.6 Ω	Depth	5.38", 136.5 mm	Cloth edge	
Qts	0.28	Front Sealing Gasket	Yes	Paper dust cap	
Magnet Weight	80 oz.	Rear Sealing Gasket	Yes		
Gap Height	0.37", 9.5 mm	Mounting Holes Diameter	0.26", 6.6 mm		
Voice Coil Diameter	2.5", 64 mm	Mounting Holes B.C.D.	11.57", 293.9 mm		
		Net Weight	16.3 lbs , 7.39 kg		
		Shipping Weight	18 lbs , 8.16 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

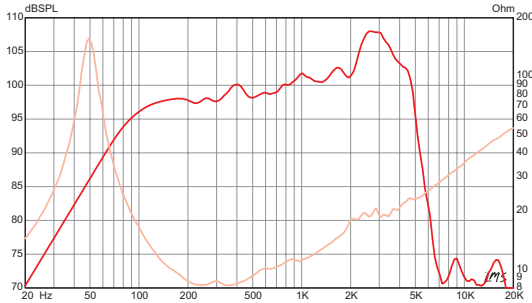

LEGEND GUITAR SERIES

LEGEND EM12N


Following in the footsteps of the popular Legend EM12, the new EM12N takes the weight out but leaves the performance in. Rated at 200 watts, the neodymium EM12N delivers the same neutral tone so you can hear more of your guitar and amp, but with even tighter, more responsive and dynamic characteristics.

12" | 200 WATTS
8 Ω



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	12", 305 mm	Enclosure Type		Edge wound aluminum voice coil	
Nominal Impedance*	8 Ω	Closed Back	Acceptable	Polyimide former	
Power Rating*	200 W	Open Back	Acceptable	Neodymium magnet	
Resonance (Fs)	50.9 Hz	Driver Volume Displaced	0.06 cu.ft., 1.81 liters	Vented core	
Usable Frequency Range	60 Hz – 4.2 kHz	Overall Diameter	12.17", 309.1 mm	Pressed steel basket	
Sensitivity*	99.9 dB	Baffle Hole Diameter	11.13", 282.7 mm	Paper cone	
DC Resistance (Re)	7.4 Ω	Depth	5.0", 127 mm	Cloth edge	
Qts	0.34	Front Sealing Gasket	Yes	Paper dust cap	
Magnet Weight	11 oz.	Rear Sealing Gasket	Yes		
Gap Height	0.37", 9.5 mm	Mounting Holes Diameter	0.24", 6.1 mm		
Voice Coil Diameter	2.5", 64 mm	Mounting Holes B.C.D.	11.75", 298.5 mm		
		Net Weight	6.6 lbs , 3.0 kg		
		Shipping Weight	8.7 lbs , 3.95 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

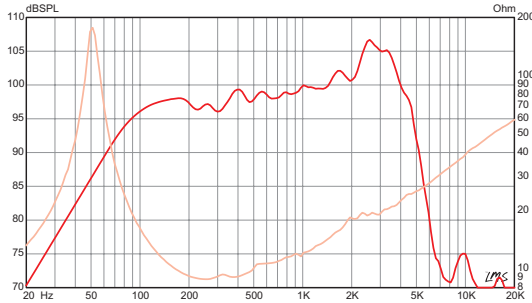

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

LEGEND GUITAR SERIES

LEGEND 1218


The Eminence Legend 1218 guitar speaker brings tone to the masses. Very balanced, fat, round, punchy lows and warm, smooth mids and lows, very clean and articulate.

12" | 150 WATTS
8 Ω



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	12", 305 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	8 Ω	Closed Back	Acceptable	Polyimide former	
Power Rating*	150 W	Open Back	Acceptable	Ferrite magnet	
Resonance (Fs)	100 Hz	Driver Volume Displaced	0.071 cu.ft., 2 liters	Non-vented core	
Usable Frequency Range	80 Hz – 4.2 kHz	Overall Diameter	12.03", 305.6 mm	Pressed steel basket	
Sensitivity*	98.7 dB	Baffle Hole Diameter	11.07", 281.2 mm	Paper cone	
DC Resistance (Re)	6.95 Ω	Depth	5.1", 129.5 mm	Paper cone edge	
Qts	0.89	Front Sealing Gasket	Yes	Zurette dust cap	
Magnet Weight	38 oz.	Rear Sealing Gasket	Yes		
Gap Height	0.31", 7.9 mm	Mounting Holes Diameter	0.25", 6.4 mm		
Voice Coil Diameter	2", 51 mm	Mounting Holes B.C.D.	11.59", 294.4 mm		
		Net Weight	8.4 lbs , 3.81 kg		
		Shipping Weight	10.6 lbs , 4.81 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

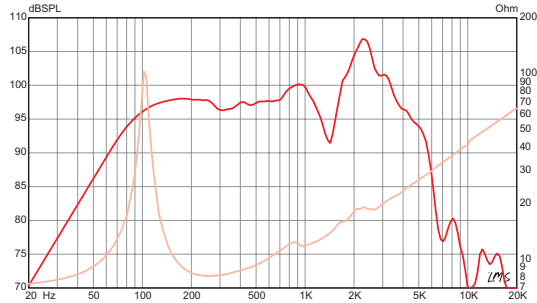

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

LEGEND GUITAR SERIES

LEGEND V128


The Eminence Legend V128 guitar speaker features balanced, more mellow British sound with warm, smooth mids and highs and tight lows.

12" | 120 WATTS
8 OR 16 Ω



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	12", 305 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	8 or 16 Ω	Closed Back	Acceptable	Polyimide former	
Power Rating*	120 W	Open Back	Acceptable	Ferrite magnet	
Resonance (Fs)	89 Hz	Driver Volume Displaced	0.071 cu.ft., 2 liters	Non-vented core	
Usable Frequency Range	80 Hz – 5 kHz	Overall Diameter	12.03", 305.6 mm	Pressed steel basket	
Sensitivity*	100.9 dB	Baffle Hole Diameter	11.07", 281.2 mm	Paper cone	
DC Resistance (Re)	6.37 Ω	Depth	5.1", 129.5 mm	Paper cone edge	
Qts	0.77	Front Sealing Gasket	Yes	Solid composition felt dust cap	
Magnet Weight	38 oz.	Rear Sealing Gasket	Yes		
Gap Height	0.31", 7.9 mm	Mounting Holes Diameter	0.25", 6.4 mm		
Voice Coil Diameter	1.75", 44 mm	Mounting Holes B.C.D.	11.59", 294.4 mm		
		Net Weight	8.1 lbs , 3.67 kg		
		Shipping Weight	10.1 lbs , 4.58 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

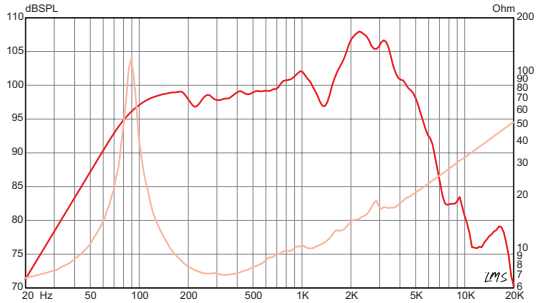

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

LEGEND GUITAR SERIES

LEGEND 1258


Vintage American tone with moderate but tight lows, warm, smooth upper-mid emphasis and extended highs. American growl, but with sparkle, definition and an edgy top-end.

12" | 75 WATTS
8 Ω



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	12", 305 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	8 Ω	Closed Back	Acceptable	Polyimide former	
Power Rating*	75 W	Open Back	Acceptable	Ferrite magnet	
Resonance (Fs)	94 Hz	Driver Volume Displaced	0.069 cu.ft., 1.96 liters	Non-vented core	
Usable Frequency Range	80 Hz – 4 kHz	Overall Diameter	12.03", 305.6 mm	Pressed steel basket	
Sensitivity*	100.1 dB	Baffle Hole Diameter	11.07", 281.2 mm	Paper cone	
DC Resistance (Re)	7.44 Ω	Depth	4.9", 124.5 mm	Paper cone edge	
Qts	0.99	Front Sealing Gasket	Yes	Solid composition paper dust cap	
Magnet Weight	34 oz.	Rear Sealing Gasket	Yes		
Gap Height	0.31", 7.9 mm	Mounting Holes Diameter	0.25", 6.4 mm		
Voice Coil Diameter	1.5", 38 mm	Mounting Holes B.C.D.	11.59", 294.4 mm		
		Net Weight	7.8 lbs , 3.54 kg		
		Shipping Weight	9.9 lbs , 4.49 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

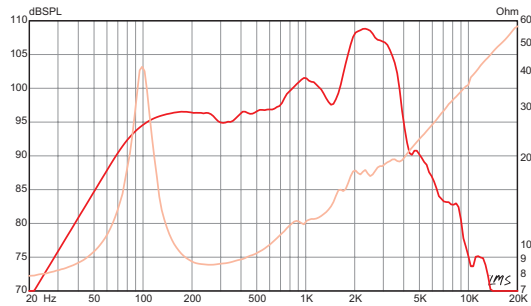

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

LEGEND GUITAR SERIES

LEGEND 1275


A British voiced speaker reminiscent of classic OEM tones from the past with tight, punchy lows, warm mids, and crisp, articulate, open highs.

12" | 75 WATTS
8 Ω



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	12", 305 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	8 Ω	Closed Back	Acceptable	Polyimide former	
Power Rating*	75 W	Open Back	Acceptable	Ferrite Magnet	
Resonance (Fs)	111 Hz	Driver Volume Displaced	0.068 cu.ft., 1.93 liters	Non-vented core	
Usable Frequency Range	80 Hz – 5.1 kHz	Overall Diameter	12.26", 311.4 mm	Pressed steel basket	
Sensitivity*	101.1 dB	Baffle Hole Diameter	11.06", 280.9 mm	Paper cone	
DC Resistance (Re)	7.36 Ω	Depth	4.44", 112.8 mm	Paper cone edge	
Qts	1.02	Front Sealing Gasket	Yes	Zurette dust cap	
Magnet Weight	34 oz.	Rear Sealing Gasket	Yes		
Gap Height	0.31", 8 mm	Mounting Holes Diameter	0.25", 6.4 mm		
Voice Coil Diameter	1.5", 38 mm	Mounting Holes B.C.D.	11.71", 297.4 mm		
		Net Weight	7 lbs , 3.18 kg		
		Shipping Weight	9 lbs , 4.08 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

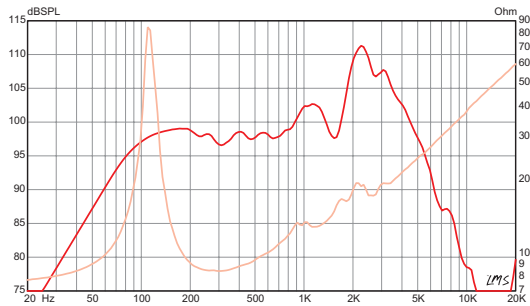

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

LEGEND GUITAR SERIES

LEGEND GB128


The Legend GB128 guitar speaker offers cleaner vintage British voiced tone with a round, punchy low end, warm, throaty mids and very open and clear highs.

12" | 50 WATTS
8 Ω



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	12", 305 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	8 Ω	Closed Back	Acceptable	Paper former	
Power Rating*	50 W	Open Back	Acceptable	Ferrite magnet	
Resonance (Fs)	86 Hz	Driver Volume Displaced	0.071 cu.ft., 2 liters	Non-vented core	
Usable Frequency Range	80 Hz – 5.1 kHz	Overall Diameter	12.03", 305.6 mm	Pressed steel basket	
Sensitivity*	101.3 dB	Baffle Hole Diameter	11.07", 281.2 mm	Paper cone	
DC Resistance (Re)	6.37 Ω	Depth	5.1", 129.5 mm	Paper cone edge	
Qts	0.65	Front Sealing Gasket	Yes	Zurette dust cap	
Magnet Weight	38 oz.	Rear Sealing Gasket	Yes		
Gap Height	0.31", 7.9 mm	Mounting Holes Diameter	0.25", 6.4 mm		
Voice Coil Diameter	1.75", 44 mm	Mounting Holes B.C.D.	11.59", 294.4 mm		
		Net Weight	8.1 lbs , 3.67 kg		
		Shipping Weight	10.1 lbs , 4.58 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

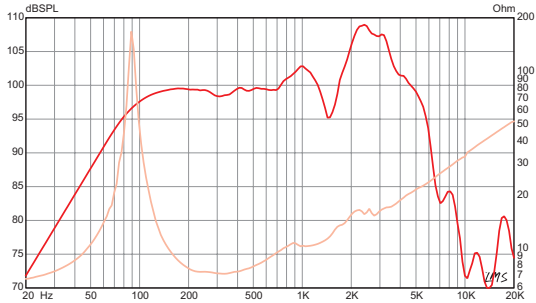

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

LEGEND GUITAR SERIES

LEGEND 1518


A higher power 15" guitar speaker with well balanced vintage guitar tone. Big low-end, with a mellow, but singing top end and medium break-up.

15" | 150 WATTS
8 Ω



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	15", 381 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	8 Ω	Closed Back	Acceptable	Polyimide former	
Power Rating*	150 W	Open Back	Acceptable	Ferrite magnet	
Resonance (Fs)	82 Hz	Driver Volume Displaced	0.128 cu.ft., 3.62 liters	Non-vented core	
Usable Frequency Range	60 Hz – 4 kHz	Overall Diameter	15.15", 384.8 mm	Pressed steel basket	
Sensitivity*	103.4 dB	Baffle Hole Diameter	13.87", 352.3 mm	Paper cone	
DC Resistance (Re)	7.16 Ω	Depth	6.1", 154.9 mm	Paper cone edge	
Qts	0.93	Front Sealing Gasket	Yes	Zurette dust cap	
Magnet Weight	59 oz.	Rear Sealing Gasket	N/A		
Gap Height	0.31", 7.9 mm	Mounting Holes Diameter	0.25", 6.4 mm		
Voice Coil Diameter	2", 51 mm	Mounting Holes B.C.D.	14.56", 369.8 mm		
		Net Weight	12.1 lbs , 5.49 kg		
		Shipping Weight	14.1 lbs , 6.4 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

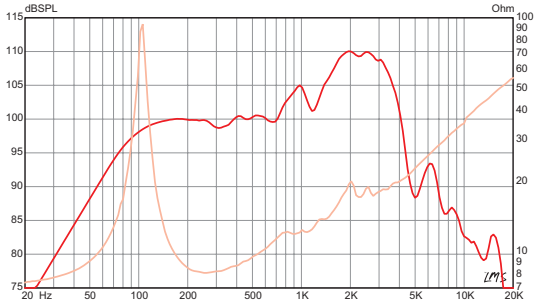

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

Patriot Guitar Series

620H


The little brother to the 820H, the 620H is a four ohm hemp cone speaker with warm, full, and clean tone that will make a small, thin amp sound bigger and fatter. Cleaner, warmer, fatter, and better definition than any stock 6.5” speaker.

6” | 20 WATTS
4 Ω



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	6.5", 165 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	4 Ω	Closed Back	Acceptable	Paper former	
Power Rating*	20 W	Open Back	Acceptable	Ferrite magnet	
Resonance (Fs)	114 Hz	Driver Volume Displaced	0.011 cu.ft., 0.3 liters	Non-vented core	
Usable Frequency Range	100 Hz – 5.3 kHz	Overall Diameter	6.59", 167.4 mm	Pressed steel basket	
Sensitivity*	94.6 dB	Baffle Hole Diameter	5.65", 143.5 mm	Paper cone	
DC Resistance (Re)	3.94 Ω	Depth	2.8", 71.1 mm	Full molded paper cone	
Qts	0.49	Front Sealing Gasket	Yes	Paper dust cap	
Magnet Weight	15 oz.	Rear Sealing Gasket	Yes		
Gap Height	0.25", 6.4 mm	Mounting Holes Diameter	0.23", 5.8 mm		
Voice Coil Diameter	1", 25 mm	Mounting Holes B.C.D.	6.06", 153.9 mm		
		Net Weight	2.9 lbs , 1.32 kg		
		Shipping Weight	3.6 lbs , 1.63 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

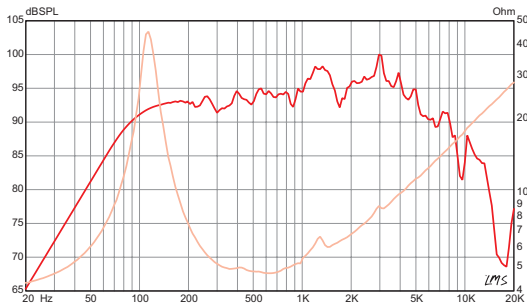

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

Patriot Guitar Series

820H


A four ohm hemp cone speaker with rich, warm, full bodied tone with fat, punchy lows, smooth, but defined highs, and a nice break up. Prominent mids, but with a warm, smooth texture.

8” | 20 WATTS
4 Ω



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	8", 203 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	4 Ω	Closed Back	Acceptable	Polyimide former	
Power Rating*	20 W	Open Back	Acceptable	Ferrite magnet	
Resonance (Fs)	144 Hz	Driver Volume Displaced	0.018 cu.ft., 0.51 liters	Non-vented core	
Usable Frequency Range	80 Hz – 4.6 kHz	Overall Diameter	8.24", 209.3 mm	Pressed steel basket	
Sensitivity*	96.1 dB	Baffle Hole Diameter	7.13", 181.1 mm	Paper cone	
DC Resistance (Re)	3.64 Ω	Depth	3.06", 77.7 mm	Full paper cone	
Qts	0.88	Front Sealing Gasket	Yes	Zurette dust cap	
Magnet Weight	15 oz.	Rear Sealing Gasket	N/A		
Gap Height	0.25", 6.4 mm	Mounting Holes Diameter	0.22", 5.6 mm		
Voice Coil Diameter	1", 25 mm	Mounting Holes B.C.D.	7.75", 196.9 mm		
		Net Weight	3.1 lbs , 1.41 kg		
		Shipping Weight	3.9 lbs , 1.77 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

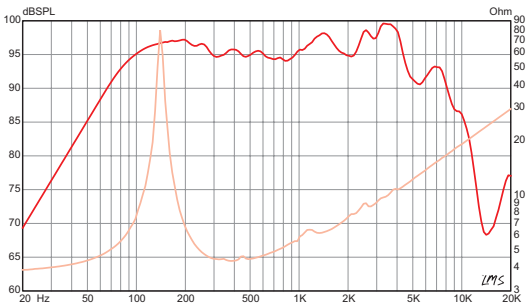

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

Patriot Guitar Series

CANNABIS REX 10™


A highly requested 10” version of our popular Cannabis Rex, this hemp cone speaker offers warm, smooth, clean, and full tone, but with high-end definition – just like its big brother. Great to tame a bright amp and/or guitar.

10” | 50 WATTS
8 Ω



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	10", 254 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	8 Ω	Closed Back	Acceptable	Paper former	
Power Rating*	50 W	Open Back	Acceptable	Ferrite magnet	
Resonance (Fs)	130 Hz	Driver Volume Displaced	0.039 cu.ft., 1.1 liters	Pressed steel basket	
Usable Frequency Range	80 Hz – 5.3 kHz	Overall Diameter	10.11", 256.8 mm	Hemp cone™	
Sensitivity*	99.3 dB	Baffle Hole Diameter	9.13", 231.9 mm	Paper cone edge	
DC Resistance (Re)	6.35 Ω	Depth	4.0", 101.6 mm	Zurette dust cap	
Qts	0.58	Front Sealing Gasket	Yes		
Magnet Weight	38 oz.	Rear Sealing Gasket	Yes		
Gap Height	0.31", 7.9 mm	Mounting Holes Diameter	0.23", 5.8 mm		
Voice Coil Diameter	1.75", 44.5 mm	Mounting Holes B.C.D.	9.6", 243.8 mm		
		Net Weight	7.3 lbs , 3.3 kg		
		Shipping Weight	8.4 lbs , 3.8 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

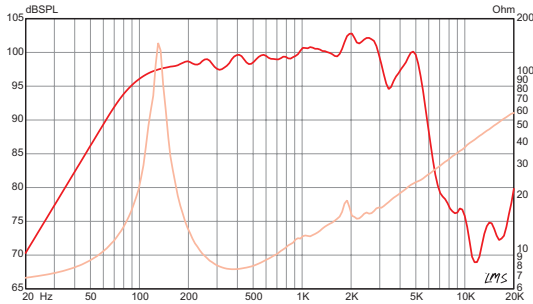

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

Patriot Guitar Series

THE COPPERHEAD™


The Eminence Copperhead guitar speaker combines the best of two tones, balancing country honk with a touch of classic blues. Extremely balanced vintage tone for smooth, driven leads and clean rhythm.

10” | 75 WATTS
8 Ω



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	10", 254 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	8 Ω	Closed Back	Acceptable	Polyimide former	
Power Rating*	75 W	Open Back	Acceptable	Ferrite magnet	
Resonance (Fs)	105 Hz	Driver Volume Displaced	0.034 cu.ft., 0.95 liters	Non-vented core	
Usable Frequency Range	80 Hz – 4.5 kHz	Overall Diameter	10.11", 256.8 mm	Pressed steel basket	
Sensitivity*	98.8 dB	Baffle Hole Diameter	9.13", 231.9 mm	Paper cone	
DC Resistance (Re)	7.59 Ω	Depth	4.2", 106.7 mm	Paper cone edge	
Qts	0.98	Front Sealing Gasket	Yes	Zurette dust cap	
Magnet Weight	20 oz.	Rear Sealing Gasket	Yes		
Gap Height	0.31", 7.9 mm	Mounting Holes Diameter	0.23", 5.8 mm		
Voice Coil Diameter	1.5", 38 mm	Mounting Holes B.C.D.	9.6", 243.8 mm		
		Net Weight	4.5 lbs , 2.04 kg		
		Shipping Weight	6.4 lbs , 2.9 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

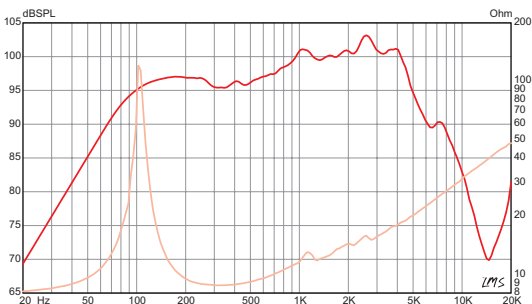

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

Patriot Guitar Series

RAGIN CAJUN™


The Eminence Ragin Cajun guitar speaker puts you in control to be heard loud and clear. Very loud, touch sensitive and responsive A low end similar in definition to a 12", crisp mids, and nice bell-like highs.

10" | 75 WATTS
8 Ω



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	10", 254 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	8 Ω	Closed Back	Acceptable	Polyimide former	
Power Rating*	75 W	Open Back	Acceptable	Ferrite magnet	
Resonance (Fs)	84 Hz	Driver Volume Displaced	0.039 cu.ft., 1.1 liters	Non-vented core	
Usable Frequency Range	80 Hz – 5 kHz	Overall Diameter	10.11", 256.8 mm	Pressed steel basket	
Sensitivity*	100.5 dB	Baffle Hole Diameter	9.13", 231.9 mm	Paper cone	
DC Resistance (Re)	7.01 Ω	Depth	4.3", 109.2 mm	Paper cone edge	
Qts	0.51	Front Sealing Gasket	Yes	Zurette dust cap	
Magnet Weight	30 oz.	Rear Sealing Gasket	Yes		
Gap Height	0.31", 7.9 mm	Mounting Holes Diameter	0.23", 5.8 mm		
Voice Coil Diameter	1.5", 38 mm	Mounting Holes B.C.D.	9.6", 243.8 mm		
		Net Weight	6.4 lbs , 2.9 kg		
		Shipping Weight	8.2 lbs , 3.72 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

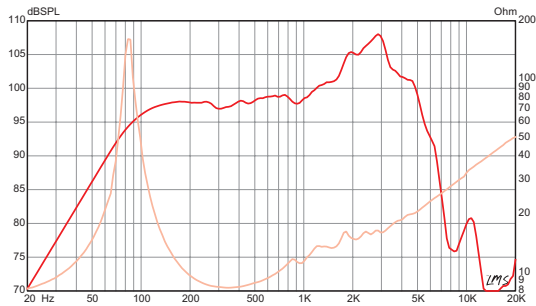

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

Patriot Guitar Series

LIL' BUDDY™


The Eminence Lil' Buddy 10" hemp cone guitar speaker offers clean and full tone with slow break-up, and is crunchy when driven. A much warmer and smoother 10" tone.

10" | 50 WATTS
8 Ω



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	10", 254 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	8 Ω	Closed Back	Acceptable	Paper former	
Power Rating*	50 W	Open Back	Acceptable	Ferrite magnet	
Resonance (Fs)	149 Hz	Driver Volume Displaced	0.039 cu.ft., 1.1 liters	Non-vented core	
Usable Frequency Range	80 Hz – 5 kHz	Overall Diameter	10.11", 256.8 mm	Pressed steel basket	
Sensitivity*	98.8 dB	Baffle Hole Diameter	9.13", 231.9 mm	Hemp cone ™	
DC Resistance (Re)	6.31 Ω	Depth	4.3", 109.2 mm	Paper cone edge	
Qts	0.84	Front Sealing Gasket	Yes	Zurette dust cap	
Magnet Weight	30 oz.	Rear Sealing Gasket	Yes		
Gap Height	0.31", 7.9 mm	Mounting Holes Diameter	0.23", 5.8 mm		
Voice Coil Diameter	1.75", 44 mm	Mounting Holes B.C.D.	9.6", 243.8 mm		
		Net Weight	6.3 lbs , 2.86 kg		
		Shipping Weight	7.4 lbs , 3.36 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

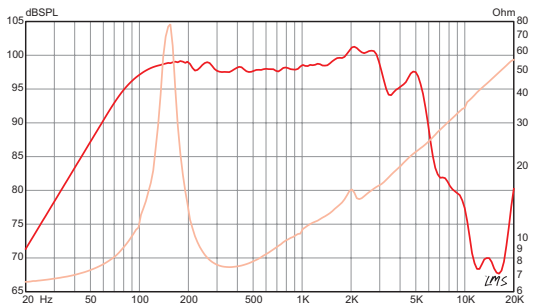

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

Patriot Guitar Series

EPS-12C

A fast and dynamic, ultra-lightweight pedal guitar speaker that has been field tested in Nashville, Arizona, Texas, and L.A. It has a full low end, neutral mids, and is bright and clear.


12" | 225 WATTS
4 Ω

— CUSTOM SHOP ONLY —



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	12", 305 mm	Enclosure Type		Edge wound Aluminum Voice Coil	
Nominal Impedance*	4 Ω	Closed Back	Acceptable	Kapton former	
Power Rating*	225 W	Open Back	Acceptable	Neodymium magnet	
Resonance (Fs)	49 Hz	Driver Volume Displaced	0.054 cu.ft., 1.53 liters	Vented core	
Usable Frequency Range	65 Hz – 4.9 kHz	Overall Diameter	12.38", 314.5 mm	Die-cast aluminum basket/ heat sink	
Sensitivity*	100.1 dB	Baffle Hole Diameter	11.06", 280.9 mm	Paper cone	
DC Resistance (Re)	3.55 Ω	Depth	5.63", 143 mm	Cloth cone edge	
Qts	0.24	Front Sealing Gasket	Yes	Treated paper dust cap	
Magnet Weight	11 oz.	Rear Sealing Gasket	Yes		
Gap Height	0.36", 9.1 mm	Mounting Holes Diameter	0.28", 7.1 mm		
Voice Coil Diameter	3", 76 mm	Mounting Holes B.C.D.	11.62", 295.2 mm		
		Net Weight	7.1 lbs , 3.22 kg		
		Shipping Weight	8.7 lbs , 3.95 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

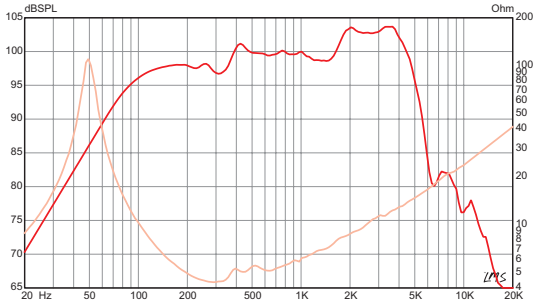

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

Patriot Guitar Series

SWAMP THANG™


Designed with heavier players in mind, the Swamp Thang is very touch sensitive and provides a thick and chunky tone with loads of sustain. The awesome bottom end will hold up to even the most demanding drop-tune or 7 string players.

12" | 150 WATTS
8 OR 16 Ω



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	12", 305 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	8 or 16 Ω	Closed Back	Acceptable	Polyimide former	
Power Rating*	150 W	Open Back	Acceptable	Ferrite magnet	
Resonance (Fs)	97 Hz	Driver Volume Displaced	0.079 cu.ft., 2.25 liters	Non-vented core	
Usable Frequency Range	70 Hz – 4 kHz	Overall Diameter	12.03", 305.6 mm	Pressed steel basket	
Sensitivity*	102 dB	Baffle Hole Diameter	11.07", 281.2 mm	Paper cone	
DC Resistance (Re)	6.92 Ω	Depth	5.2", 132.1 mm	Paper cone edge	
Qts	0.53	Front Sealing Gasket	Yes	Zurette dust cap	
Magnet Weight	59 oz.	Rear Sealing Gasket	Yes		
Gap Height	0.31", 7.9 mm	Mounting Holes Diameter	0.25", 6.4 mm		
Voice Coil Diameter	2", 51 mm	Mounting Holes B.C.D.	11.59", 294.4 mm		
		Net Weight	11.1 lbs , 5.03 kg		
		Shipping Weight	12.8 lbs , 5.81 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

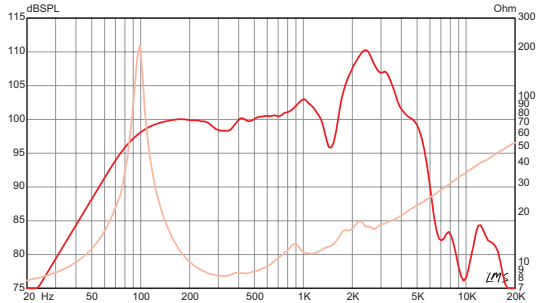

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

Patriot Guitar Series

TEXAS HEAT™


The Eminence Texas Heat is the All-American guitar speaker that’s packin’ heat, Texas style. It delivers a nice warm, fat tone with top end bite and clarity to cut through a mix while maintaining a rich, bluesy tone. Very touch-sensitive with a hint of British flavor.

12” | 150 WATTS
8, 4 OR 16 Ω



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	12", 305 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	8, 4 or 16 Ω	Closed Back	Acceptable	Polyimide former	
Power Rating*	150 W	Open Back	Acceptable	Ferrite magnet	
Resonance (Fs)	79 Hz	Driver Volume Displaced	0.071 cu.ft., 2 liters	Non-vented core	
Usable Frequency Range	70 Hz – 4.7 kHz	Overall Diameter	12.03", 305.6 mm	Pressed steel basket	
Sensitivity*	99.4 dB	Baffle Hole Diameter	11.07", 281.2 mm	Paper cone	
DC Resistance (Re)	7.3 Ω	Depth	5.1", 129.5 mm	Paper cone edge	
Qts	0.65	Front Sealing Gasket	Yes	Zurette dust cap	
Magnet Weight	38 oz.	Rear Sealing Gasket	Yes		
Gap Height	0.31", 7.9 mm	Mounting Holes Diameter	0.25", 6.4 mm		
Voice Coil Diameter	2", 51 mm	Mounting Holes B.C.D.	11.59", 294.4 mm		
		Net Weight	8.3 lbs , 3.76 kg		
		Shipping Weight	10 lbs , 4.54 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

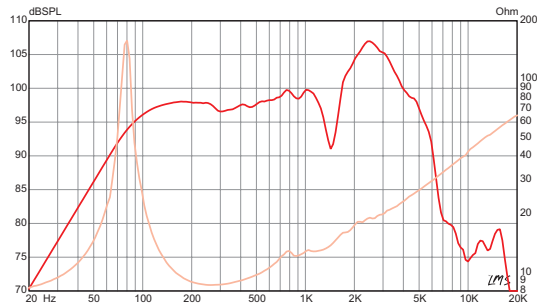

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

Patriot Guitar Series

LIL' TEXAS™


The lightweight Eminence Lil' Texas guitar speaker gives an All-American tone much like the ceramic Texas Heat. A very well-balanced tone with tight lows, crisp mids, and top end bite and clarity.

12” | 125 WATTS
8 Ω



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	12", 305 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	8 Ω	Closed Back	Acceptable	Polyimide former	
Power Rating*	125 W	Open Back	Acceptable	Neodymium magnet	
Resonance (Fs)	90 Hz	Driver Volume Displaced	0.059 cu.ft., 1.67 liters	Non-vented core	
Usable Frequency Range	80 Hz – 5 kHz	Overall Diameter	12.03", 305.6 mm	Pressed steel basket	
Sensitivity*	101.2 dB	Baffle Hole Diameter	11.07", 281.2 mm	Paper cone	
DC Resistance (Re)	7.2 Ω	Depth	5.07", 128.8 mm	Paper cone edge	
Qts	0.65	Front Sealing Gasket	Yes	Zurette dust cap	
Magnet Weight	4 oz.	Rear Sealing Gasket	Yes		
Gap Height	0.28", 7.1 mm	Mounting Holes Diameter	0.25", 6.4 mm		
Voice Coil Diameter	2", 51 mm	Mounting Holes B.C.D.	11.59", 294.4 mm		
		Net Weight	4.1 lbs , 1.86 kg		
		Shipping Weight	5.8 lbs , 2.63 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

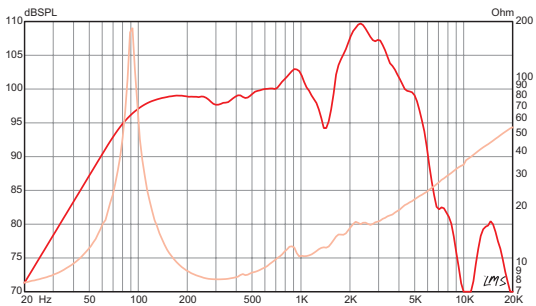

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

Patriot Guitar Series

RED WHITE AND BLUES™


The Eminence Red White and Blues guitar speaker is the natural upgrade for the classic American amp. A darker tone that’s great for taming a bright amp. Tight low-end definition with warm, smooth mids and highs.

12” | 120 WATTS
8 Ω



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	12", 305 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	8 Ω	Closed Back	Acceptable	Polyimide former	
Power Rating*	120 W	Open Back	Acceptable	Ferrite magnet	
Resonance (Fs)	110 Hz	Driver Volume Displaced	0.071 cu.ft., 2 liters	Non-vented core	
Usable Frequency Range	80 Hz – 4.3 kHz	Overall Diameter	12.03", 305.6 mm	Pressed steel basket	
Sensitivity*	101 dB	Baffle Hole Diameter	11.07", 281.2 mm	Paper cone	
DC Resistance (Re)	6.42 Ω	Depth	5.1", 129.5 mm	Paper cone edge	
Qts	0.79	Front Sealing Gasket	Yes	Zurette dust cap	
Magnet Weight	38 oz.	Rear Sealing Gasket	Yes		
Gap Height	0.31", 7.9 mm	Mounting Holes Diameter	0.25", 6.4 mm		
Voice Coil Diameter	1.75", 44 mm	Mounting Holes B.C.D.	11.59", 294.4 mm		
		Net Weight	8.2 lbs , 3.72 kg		
		Shipping Weight	10.1 lbs , 4.58 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

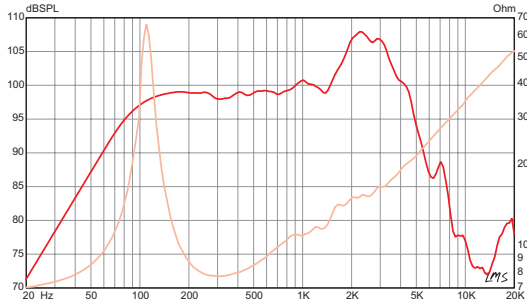

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

FDM™ TECHNOLOGY

MAVERICK™


Don’t sacrifice tone for lower stage volume! The Eminence Maverick™ guitar speaker with patent-pending FDM™ technology puts tonal control at your fingertips. Simply adjust the knob on the back of the speaker to attenuate volume while creating an overdriven, saturated tube tone. Perfect for small venues, studios and practice situations. Very balanced, versatile American tone with fat lows, warm mids, and articulate highs.

12” | 75 WATTS
8 Ω



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	12", 305 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	8 Ω	Closed Back	Acceptable	Polyimide former	
Power Rating*	75 W	Open Back	Acceptable	Ferrite magnet	
Resonance (Fs)	82 Hz	Driver Volume Displaced	0.078 cu.ft., 2.2 liters	FDM Technology	
Usable Frequency Range	80 Hz – 5 kHz	Overall Diameter	12.03", 305.6 mm	Pressed steel basket	
Sensitivity*	91.5 – 100 dB	Baffle Hole Diameter	11.07", 281.2 mm	Paper cone	
DC Resistance (Re)	5.99 Ω	Depth	6.56", 166.7 mm	Paper cone edge	
Qts	1.09	Front Sealing Gasket	Yes	Zurette dust cap	
Magnet Weight	38 oz.	Rear Sealing Gasket	Yes		
Gap Height	0.31", 7.9 mm	Mounting Holes Diameter	0.25", 6.4 mm		
Voice Coil Diameter	1.75", 44 mm	Mounting Holes B.C.D.	11.59", 294.4 mm		
		Net Weight	7.8 lbs , 3.54 kg		
		Shipping Weight	9.7 lbs , 4.4 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

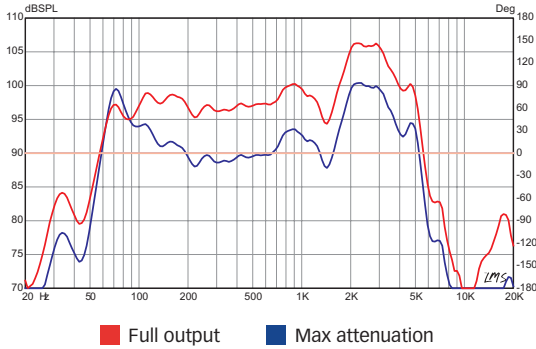

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

Patriot Guitar Series

CANNABIS REX™


The hemp cone Cannabis Rex guitar speaker offers clean and full tone with fat lows and warm, smooth mids and highs. A round and open tone makes it a great upgrade for American voiced amps.

12" | 50 WATTS
8 OR 16 Ω



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	12", 305 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	8 or 16 Ω	Closed Back	Acceptable	Paper former	
Power Rating*	50 W	Open Back	Acceptable	Ferrite magnet	
Resonance (Fs)	96 Hz	Driver Volume Displaced	0.071 cu.ft., 2 liters	Non-vented core	
Usable Frequency Range	80 Hz – 4.5 kHz	Overall Diameter	12.03", 305.6 mm	Pressed steel basket	
Sensitivity*	101.8 dB	Baffle Hole Diameter	11.07", 281.2 mm	Hemp cone™	
DC Resistance (Re)	6.56 Ω	Depth	5.1", 129.5 mm	Paper cone edge	
Qts	0.64	Front Sealing Gasket	Yes	Zurette dust cap	
Magnet Weight	38 oz.	Rear Sealing Gasket	Yes		
Gap Height	0.31", 7.9 mm	Mounting Holes Diameter	0.25", 6.4 mm		
Voice Coil Diameter	1.75", 44 mm	Mounting Holes B.C.D.	11.59", 294.4 mm		
		Net Weight	8.2 lbs , 3.72 kg		
		Shipping Weight	9.8 lbs , 4.45 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

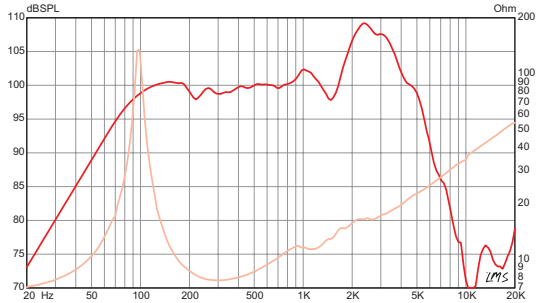

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

Patriot Guitar Series

GUIT-FIDDLE


Finally, a 12" speaker voiced specifically for fiddle. Reduced bow friction noise and tame upper-mids. It's also great for guitar if you want thick tone with warm, smooth, more mellow mids and highs.

12" | 50 WATTS
8 Ω



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	12", 305 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	8 Ω	Closed Back	Acceptable	Polyimide former	
Power Rating*	50 W	Open Back	Acceptable	Ferrite magnet	
Resonance (Fs)	82.2 Hz	Driver Volume Displaced	0.071 cu.ft., 2 liters	Non-vented core	
Usable Frequency Range	80 Hz – 4.5 kHz	Overall Diameter	12.17", 309.1 mm	Pressed steel basket	
Sensitivity*	100.1 dB	Baffle Hole Diameter	11.13", 282.7 mm	Hemp cone™	
DC Resistance (Re)	7.34 Ω	Depth	5.1", 129.5 mm	Paper cone edge	
Qts	0.56	Front Sealing Gasket	Yes	Zurette dust cap	
Magnet Weight	38 oz.	Rear Sealing Gasket	Yes		
Gap Height	0.31", 7.9 mm	Mounting Holes Diameter	0.24", 6.1 mm		
Voice Coil Diameter	2.0", 50.8 mm	Mounting Holes B.C.D.	11.75", 298.54 mm		
		Net Weight	7.9 lbs , 3.58 kg		
		Shipping Weight	9.8 lbs , 4.45 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

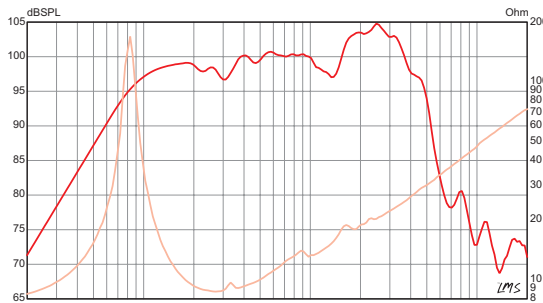

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

PATRIOT GUITAR SERIES

EPS-15C


The lightweight neodymium Eminence EPS-15C guitar speaker is designed for pedal steel, lap steel, and related guitars. The aluminum dust cap lends chimey, extended highs that have come to define the classic pedal steel sound - all under 8 lbs.

15” | 300 WATTS
4 Ω



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	15", 381 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	4 Ω	Closed Back	Acceptable	Polyimide former	
Power Rating*	300 W	Open Back	Acceptable	Neodymium magnet	
Resonance (Fs)	42 Hz	Driver Volume Displaced	0.09 cu.ft., 2.54 liters	Vented core	
Usable Frequency Range	42 Hz – 2.9 kHz	Overall Diameter	15.32", 389.1 mm	Die-cast aluminum basket	
Sensitivity*	100.2 dB	Baffle Hole Diameter	14", 355.6 mm	Paper cone	
DC Resistance (Re)	3.57 Ω	Depth	6.81", 173 mm	Cloth cone edge	
Qts	0.31	Front Sealing Gasket	Yes	Aluminum dust cap	
Magnet Weight	11 oz.	Rear Sealing Gasket	Yes		
Gap Height	0.36", 9.3 mm	Mounting Holes Diameter	0.28", 7.1 mm		
Voice Coil Diameter	3", 76 mm	Mounting Holes B.C.D.	14.56", 369.8 mm		
		Net Weight	7.9 lbs , 3.58 kg		
		Shipping Weight	10.1 lbs , 4.58 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

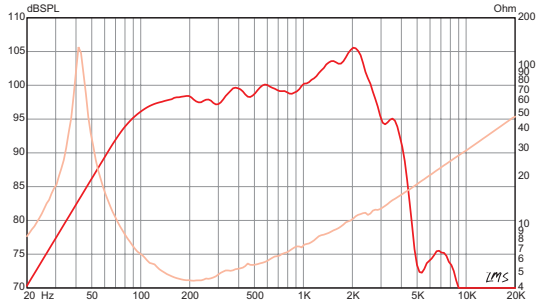

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

REDCOAT GUITAR SERIES

RAMROD™


The Eminence Ramrod is a very loud and gutsy 10” British-voiced guitar speaker with meaty tone. A very balanced tone with full lows, warm, throaty mids, clear highs and abundant harmonic detail.

10” | 75 WATTS
8 Ω



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	10", 254 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	8 Ω	Closed Back	Acceptable	Polyimide former	
Power Rating*	75 W	Open Back	Acceptable	Ferrite magnet	
Resonance (Fs)	101 Hz	Driver Volume Displaced	0.039 cu.ft., 1.1 liters	Non-vented core	
Usable Frequency Range	80 Hz – 4 kHz	Overall Diameter	10.11", 256.8 mm	Pressed steel basket	
Sensitivity*	100.2 dB	Baffle Hole Diameter	9.13", 231.9 mm	Paper cone	
DC Resistance (Re)	7.3 Ω	Depth	4.3", 109.2 mm	Paper cone edge	
Qts	0.64	Front Sealing Gasket	Yes	Zurette dust cap	
Magnet Weight	30 oz.	Rear Sealing Gasket	Yes		
Gap Height	0.31", 7.9 mm	Mounting Holes Diameter	0.23", 5.8 mm		
Voice Coil Diameter	1.5", 38 mm	Mounting Holes B.C.D.	9.6", 243.8 mm		
		Net Weight	6.4 lbs , 2.9 kg		
		Shipping Weight	8.3 lbs , 3.76 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

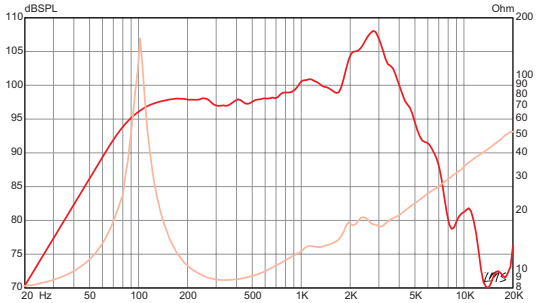

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

REDCOAT GUITAR SERIES

RF10C


A ceramic version of our popular Red Fang 12 alnico. A round and beefy British tone with abundant harmonic detail, full lows, and nice grit and chime.

10" | 50 WATTS
8 Ω



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	10", 254 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	8 Ω	Closed Back	Acceptable	Nomex former	
Power Rating*	50 W	Open Back	Acceptable	Ferrite magnet	
Resonance (Fs)	105 Hz	Driver Volume Displaced	0.039 cu.ft., 1.1 liters	Non-vented core	
Usable Frequency Range	80 Hz – 4.2 kHz	Overall Diameter	10.11", 256.8 mm	Pressed steel basket	
Sensitivity*	100.4 dB	Baffle Hole Diameter	9.13", 231.9 mm	Paper cone	
DC Resistance (Re)	5.98 Ω	Depth	4", 101.6 mm	Paper cone edge	
Qts	0.53	Front Sealing Gasket	Yes	Zurette dust cap	
Magnet Weight	38 oz.	Rear Sealing Gasket	Yes		
Gap Height	0.31", 8 mm	Mounting Holes Diameter	0.23", 5.8 mm		
Voice Coil Diameter	1.75", 44 mm	Mounting Holes B.C.D.	9.6", 243.8 mm		
		Net Weight	7.3 lbs , 3.31 kg		
		Shipping Weight	8.4 lbs , 3.81 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

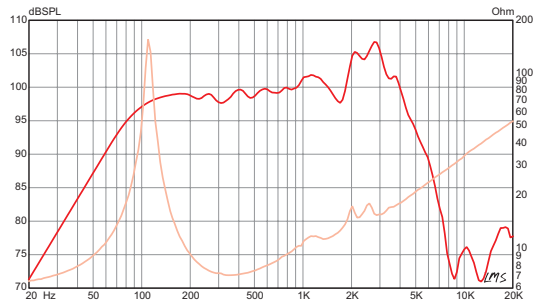

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

REDCOAT GUITAR SERIES

THE TONKER™


The Eminence Tonker guitar speaker features very fat, punchy, clean and warm tone. A nice, smooth midrange honk and clear, open highs. Carries the day, from English Rock to Tele Twang.

12" | 150 WATTS
8 Ω



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	12", 305 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	8 Ω	Closed Back	Acceptable	Polyimide former	
Power Rating*	150 W	Open Back	Acceptable	Ferrite magnet	
Resonance (Fs)	89 Hz	Driver Volume Displaced	0.079 cu.ft., 2.25 liters	Non-vented core	
Usable Frequency Range	70 Hz – 5 kHz	Overall Diameter	12.03", 305.6 mm	Pressed steel basket	
Sensitivity*	101.5 dB	Baffle Hole Diameter	11.07", 281.2 mm	Paper cone	
DC Resistance (Re)	7.36 Ω	Depth	5.2", 132.1 mm	Paper cone edge	
Qts	0.47	Front Sealing Gasket	Yes	Zurette dust cap	
Magnet Weight	59 oz.	Rear Sealing Gasket	Yes		
Gap Height	0.31", 7.9 mm	Mounting Holes Diameter	0.25", 6.4 mm		
Voice Coil Diameter	2", 51 mm	Mounting Holes B.C.D.	11.59", 294.4 mm		
		Net Weight	11.1 lbs , 5.03 kg		
		Shipping Weight	13.2 lbs , 5.99 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

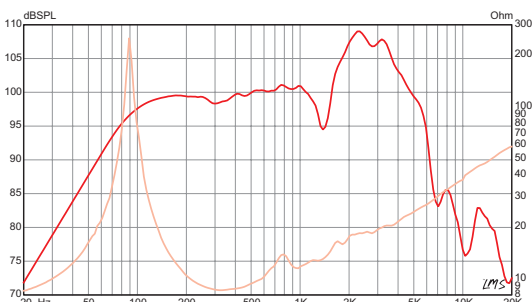

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

REDCOAT GUITAR SERIES

TONKERLITE™


A lightweight 12” guitar speaker with nice round, punchy, balanced tone like the Tonker, but a touch brighter on the top end and less lower-mid definition – all at 4 lbs.!

12” | 125 WATTS
8 Ω



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	12", 305 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	8 Ω	Closed Back	Acceptable	Polyimide former	
Power Rating*	125 W	Open Back	Acceptable	Neodymium magnet	
Resonance (Fs)	109 Hz	Driver Volume Displaced	0.059 cu.ft., 1.67 liters	Non-vented core	
Usable Frequency Range	80 Hz – 5 kHz	Overall Diameter	12.03", 305.6 mm	Pressed steel basket	
Sensitivity*	101.1 dB	Baffle Hole Diameter	11.07", 281.2 mm	Paper cone	
DC Resistance (Re)	7.2 Ω	Depth	5.1", 129.5 mm	Paper cone edge	
Qts	0.8	Front Sealing Gasket	Yes	Zurette dust cap	
Magnet Weight	4 oz.	Rear Sealing Gasket	Yes		
Gap Height	0.28", 7.1 mm	Mounting Holes Diameter	0.25", 6.4 mm		
Voice Coil Diameter	2", 51 mm	Mounting Holes B.C.D.	11.59", 294.4 mm		
		Net Weight	4.1 lbs , 1.86 kg		
		Shipping Weight	5.8 lbs , 2.63 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

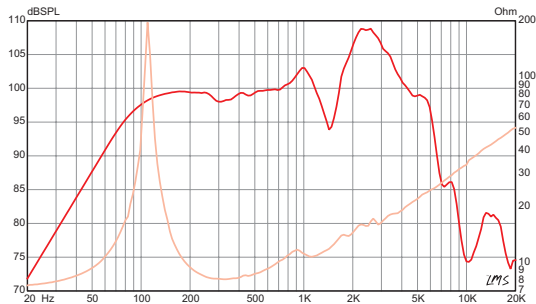

REDCOAT GUITAR SERIES

MAN O WAR™


The Eminence Man O War guitar speaker is the work horse of tone. A proven and revered sound, very loud and responsive/articulate in every register. Chunky, solid low end and crisp mids and highs.

12” | 120 WATTS
8 OR 16 Ω



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	12", 305 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	8 or 16 Ω	Closed Back	Acceptable	Polyimide former	
Power Rating*	120 W	Open Back	Acceptable	Ferrite magnet	
Resonance (Fs)	91 Hz	Driver Volume Displaced	0.071 cu.ft., 2 liters	Non-vented core	
Usable Frequency Range	80 Hz – 5 kHz	Overall Diameter	12.03", 305.6 mm	Pressed steel basket	
Sensitivity*	101.6 dB	Baffle Hole Diameter	11.07", 281.2 mm	Paper cone	
DC Resistance (Re)	6.2 Ω	Depth	5.2", 132.1 mm	Paper cone edge	
Qts	0.68	Front Sealing Gasket	Yes	Zurette dust cap	
Magnet Weight	38 oz.	Rear Sealing Gasket	Yes		
Gap Height	0.31", 7.9 mm	Mounting Holes Diameter	0.25", 6.4 mm		
Voice Coil Diameter	1.75", 44 mm	Mounting Holes B.C.D.	11.59", 294.4 mm		
		Net Weight	8.1 lbs , 3.67 kg		
		Shipping Weight	9.9 lbs , 4.49 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

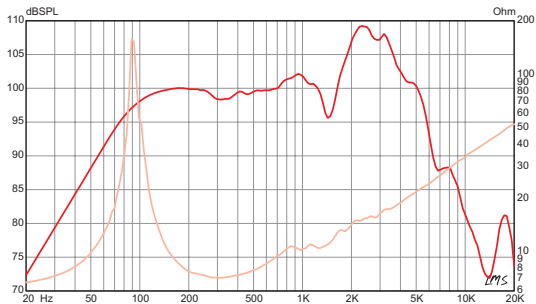

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

REDCOAT GUITAR SERIES

CV-75

Over 10 years in development, we’ve captured the epitome of British tone. Complete tonal balance – grunt and punch in the lows, warm/tailored mids, and nice, clear, open/airy highs.

12” | 75 WATTS
8 OR 16 Ω



REDCOAT GUITAR SERIES

CV-65


Tapping in to another flavor of classic British tone, the 12” CV-65 features warm, throaty mids, sweet, articulate highs, and nice, detailed harmonic complexity. As compared to the 75 watt model, the 65 watt CV-65 is more round and full in the lows, less aggressive in the mids, and is more focused and articulate on the highs.

12” | 65 WATTS
8 Ω




SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	12", 305 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	8 or 16 Ω	Closed Back	Acceptable	Nomex former	
Power Rating*	75 W	Open Back	Acceptable	Ferrite magnet	
Resonance (Fs)	79 Hz	Driver Volume Displaced	0.079 cu.ft., 2.25 liters	Non-vented core	
Usable Frequency Range	80 Hz – 5.5 kHz	Overall Diameter	12.17", 309.1 mm	Pressed steel basket	
Sensitivity*	102.2 dB	Baffle Hole Diameter	11.13", 282.7 mm	Paper cone	
DC Resistance (Re)	6.89 Ω	Depth	5.25", 133.4 mm	Paper cone edge	
Qts	0.42	Front Sealing Gasket	Yes	Zurette dust cap	
Magnet Weight	56 oz.	Rear Sealing Gasket	No		
Gap Height	0.31", 8 mm	Mounting Holes Diameter	0.24", 6.1 mm		
Voice Coil Diameter	1.75", 44 mm	Mounting Holes B.C.D.	11.75", 298.5 mm		
		Net Weight	10.8 lbs , 4.9 kg		
		Shipping Weight	12.5 lbs , 5.67 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

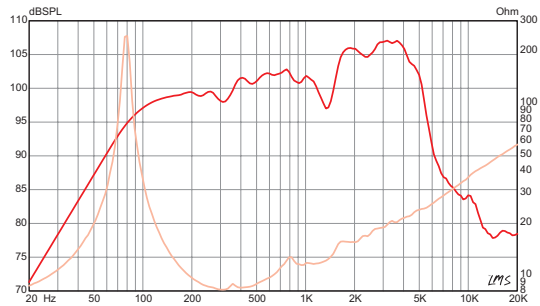

SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	12", 305 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	8 Ω	Closed Back	Acceptable	Nomex former	
Power Rating*	65 W	Open Back	Acceptable	Ferrite magnet	
Resonance (Fs)	76 Hz	Driver Volume Displaced	0.069 cu.ft., 1.96 liters	Non-vented core	
Usable Frequency Range	80 Hz – 5 kHz	Overall Diameter	12.17", 309.1 mm	Pressed steel basket	
Sensitivity*	100.6 dB	Baffle Hole Diameter	11.13", 282.7 mm	Full molded paper cone	
DC Resistance (Re)	6.9 Ω	Depth	5.13", 130.2 mm	Paper cone edge	
Qts	0.59	Front Sealing Gasket	Yes	Zurette dust cap	
Magnet Weight	34 oz.	Rear Sealing Gasket	No		
Gap Height	0.31", 8 mm	Mounting Holes Diameter	0.24", 6.1 mm		
Voice Coil Diameter	1.75", 44 mm	Mounting Holes B.C.D.	11.75", 298.5 mm		
		Net Weight	7.3 lbs , 3.31 kg		
		Shipping Weight	9.4 lbs , 4.26 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

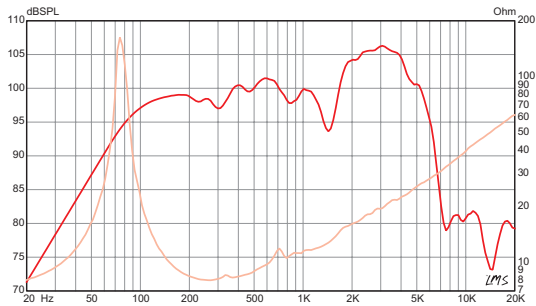

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

REDCOAT GUITAR SERIES

THE GOVERNOR™


A versatile guitar speaker with classic British tone, offering tight, punchy lows, warm, raunchy mids, warm, smooth highs, and early break-up. A favorite among professional players on both sides of the pond.

12" | 75 WATTS
8 OR 16 Ω



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	12", 305 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	8 or 16 Ω	Closed Back	Acceptable	Nomex former	
Power Rating*	75 W	Open Back	Acceptable	Ferrite magnet	
Resonance (Fs)	101 Hz	Driver Volume Displaced	0.079 cu.ft., 2.25 liters	Non-vented core	
Usable Frequency Range	80 Hz – 4.2 kHz	Overall Diameter	12.03", 305.6 mm	Pressed steel basket	
Sensitivity*	102.3 dB	Baffle Hole Diameter	11.07", 281.2 mm	Paper cone	
DC Resistance (Re)	6.81 Ω	Depth	5.2", 132.1 mm	Paper cone edge	
Qts	0.56	Front Sealing Gasket	Yes	Zurette dust cap	
Magnet Weight	56 oz.	Rear Sealing Gasket	Yes		
Gap Height	0.31", 7.9 mm	Mounting Holes Diameter	0.25", 6.4 mm		
Voice Coil Diameter	1.75", 44 mm	Mounting Holes B.C.D.	11.59", 294.4 mm		
		Net Weight	10.8 lbs , 4.9 kg		
		Shipping Weight	12.6 lbs , 5.72 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

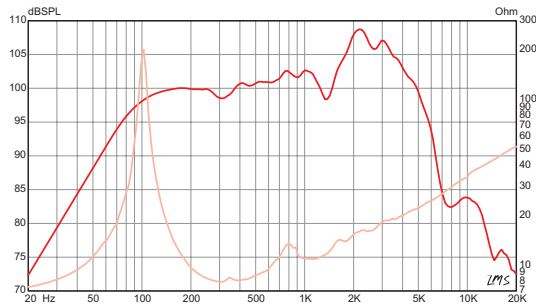

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

REDCOAT GUITAR SERIES

THE WIZARD™


The Eminence Wizard guitar speaker is one of the most versatile and well-balanced 12" speakers you will find. Very articulate, but with a hint of grit. Nice sustain and exceptionally tight bottom. Classic Rock tones of the '60s and '70s, and a favorite among today's heavy rockers.

12" | 75 WATTS
8 OR 16 Ω



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	12", 305 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	8 or 16 Ω	Closed Back	Acceptable	Nomex former	
Power Rating*	75 W	Open Back	Acceptable	Ferrite magnet	
Resonance (Fs)	89 Hz	Driver Volume Displaced	0.079 cu.ft., 2.25 liters	Non-vented core	
Usable Frequency Range	80 Hz – 5.3 kHz	Overall Diameter	12.03", 305.6 mm	Pressed steel basket	
Sensitivity*	102.8 dB	Baffle Hole Diameter	11.07", 281.2 mm	Paper cone	
DC Resistance (Re)	6.13 Ω	Depth	5.2", 132.1 mm	Paper cone edge	
Qts	0.47	Front Sealing Gasket	Yes	Zurette dust cap	
Magnet Weight	56 oz.	Rear Sealing Gasket	Yes		
Gap Height	0.31", 7.9 mm	Mounting Holes Diameter	0.25", 6.4 mm		
Voice Coil Diameter	1.75", 44 mm	Mounting Holes B.C.D.	11.59", 294.4 mm		
		Net Weight	11.1 lbs , 5.03 kg		
		Shipping Weight	12.5 lbs , 5.67 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

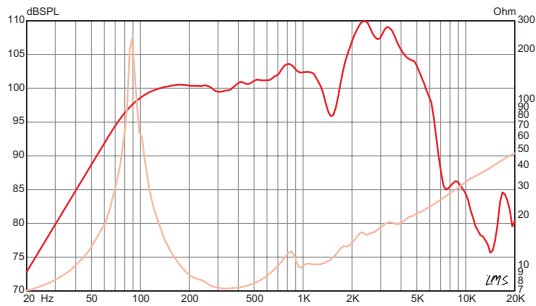

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

FDM™ TECHNOLOGY

REIGNMAKER™


Don't sacrifice tone for lower stage volume! The Eminence ReignMaker™ guitar speaker with patent-pending FDM™ technology puts tonal control at your fingertips. Simply adjust the knob on the back of the speaker to attenuate volume while creating an overdriven, saturated tube tone. Perfect for small venues, studios and practice situations. Very balanced British tone with tight/punchy lows, warm/detailed mids, abundant in harmonic detail, and articulate highs.



12" | 75 WATTS
8 Ω

SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	12", 305 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	8 Ω	Closed Back	Acceptable	Polyimide former	
Power Rating*	75 W	Open Back	Acceptable	Ferrite Magnet	
Resonance (Fs)	91 Hz	Driver Volume Displaced	0.078 cu.ft., 2.2 liters	FDM Technology	
Usable Frequency Range	80 Hz – 6.2 kHz	Overall Diameter	12.03", 305.6 mm	Pressed steel basket	
Sensitivity*	91.5 – 100 dB	Baffle Hole Diameter	11.07", 281.2 mm	Paper cone	
DC Resistance (Re)	5.98 Ω	Depth	6.56", 166.7 mm	Paper cone edge	
Qts	1.29	Front Sealing Gasket	Yes	Zurette dust cap	
Magnet Weight	38 oz.	Rear Sealing Gasket	Yes		
Gap Height	0.31", 7.9 mm	Mounting Holes Diameter	0.25", 6.4 mm		
Voice Coil Diameter	1.75", 44 mm	Mounting Holes B.C.D.	11.59", 294.4 mm		
		Net Weight	7.8 lbs , 3.54 kg		
		Shipping Weight	9.7 lbs , 4.4 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

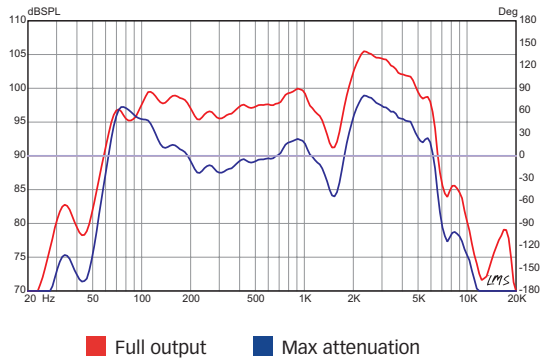

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

REDCOAT GUITAR SERIES

PRIVATE JACK™


The Eminence Private Jack guitar speaker is chock full of classic British flavor. A very well balanced speaker, moderate on the lows but thick and smooth, with abundant, warm and throaty mids and extended highs.

12" | 50 WATTS
8 OR 16 Ω



SPECIFICATION		MOUNTING INFORMATION		MATERIALS OF CONSTRUCTION	
Nominal Basket Diameter	12", 305 mm	Enclosure Type		Copper voice coil	
Nominal Impedance*	8 or 16 Ω	Closed Back	Acceptable	Paper former	
Power Rating*	50 W	Open Back	Acceptable	Ferrite magnet	
Resonance (Fs)	96 Hz	Driver Volume Displaced	0.071 cu.ft., 2 liters	Non-vented core	
Usable Frequency Range	80 Hz – 5 kHz	Overall Diameter	12.03", 305.6 mm	Pressed steel basket	
Sensitivity*	101 dB	Baffle Hole Diameter	11.07", 281.2 mm	Paper cone	
DC Resistance (Re)	7.01 Ω	Depth	5.1", 129.5 mm	Paper cone edge	
Qts	0.69	Front Sealing Gasket	Yes	Zurette dust cap	
Magnet Weight	38 oz.	Rear Sealing Gasket	Yes		
Gap Height	0.31", 7.9 mm	Mounting Holes Diameter	0.25", 6.4 mm		
Voice Coil Diameter	1.75", 44 mm	Mounting Holes B.C.D.	11.59", 294.4 mm		
		Net Weight	8 lbs , 3.63 kg		
		Shipping Weight	9.8 lbs , 4.45 kg		

FREQUENCY RESPONSE & IMPEDANCE CURVE*

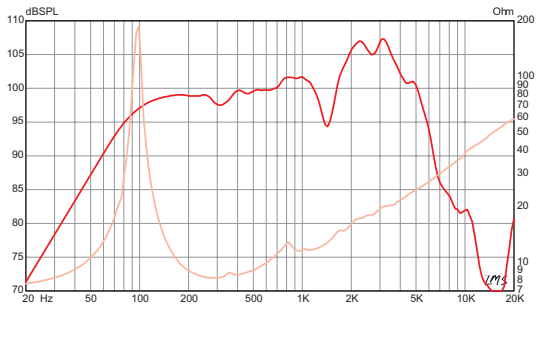

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

REDCOAT GUITAR SERIES

BIG BEN

The Eminence Big Ben guitar speaker sounds off with big British tone. A very clean and warm throaty tone with fat bass and smooth mids and highs. Abundant in lower-mid girth. A fatter, cleaner Legend 1518. A favorite among Jazz and detuned players.

15” 225 WATTS
8 Ω




SPECIFICATION

Nominal Basket Diameter	15", 381 mm	Enclosure Type	Copper voice coil
Nominal Impedance*	8 Ω	Closed Back	Acceptable
Power Rating*	225 W	Open Back	Acceptable
Resonance (Fs)	85 Hz	Driver Volume Displaced	0.128 cu.ft., 3.62 liters
Usable Frequency Range	70 Hz – 3.5 kHz	Overall Diameter	15.15", 384.8 mm
Sensitivity*	101.3 dB	Baffle Hole Diameter	13.87", 352.3 mm
DC Resistance (Re)	6.06 Ω	Depth	6.1", 154.9 mm
Qts	0.94	Front Sealing Gasket	Yes
Magnet Weight	56 oz.	Rear Sealing Gasket	Yes
Gap Height	0.37", 9.5 mm	Mounting Holes Diameter	0.25", 6.4 mm
Voice Coil Diameter	2.5", 64 mm	Mounting Holes B.C.D.	14.56", 369.8 mm
		Net Weight	12.6 lbs , 5.72 kg
		Shipping Weight	14.9 lbs , 6.76 kg

MOUNTING INFORMATION

MATERIALS OF CONSTRUCTION

FREQUENCY RESPONSE & IMPEDANCE CURVE*

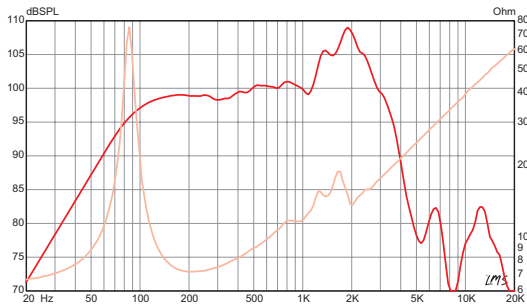

HERE'S THE
LOW-DOWN
ON GETTING GREAT
BASS TONE.

No one knows the physics of bass cabinets better than Eminence.

Understanding how woofers push things around inside an enclosure is a science and an art. That's why most bass amp manufacturers choose Eminence to supply custom designed speakers for their enclosures. Whether it's a small practice amp or 8x10 stack for the stage, there's an Eminence speaker that's designed to drive the lows as tight, fat, round or warm as you want.

The Legend Series has been a fixture on back lines for years, thumping out the bottom end for R&B, blues, rock, jazz and more. For lighter weight, but equal power, the Basslite® Series features neodymium magnets for maximum sonic punch without back-breaking load-ins.



BGH25-8

A 25 watt driver and die cast horn combination optimized specifically for bass guitar applications.

Type	Exponential
Throat Size	1.0", 25.4 mm
Dispersion	60°
Power Rating**	25 W (AES)
Nominal Impedance	8 Ω
Minimum Impedance	8.6 Ω @ 7.4 kHz
Usable Frequency Range	2.5 kHz - 20 kHz
Recommended Crossover	2.5 kHz / 12 dB
Resonance	1.3 kHz
Sensitivity	105.2 dB
Width/Height/Depth	4.20 x 4.20 x 4.80", 106.7 x 106.7 x 121.9 mm
Cut-out	3.5 in., 88.9 mm
Weight	2.20 lb., 1.00 kg
Material	Aluminum

In addition to our Legend and Basslite® models, Eminence offers many pro audio woofers that have been a mainstay among the industry's finest players and amplifier brands.

PRO AUDIO MODELS FOR BASS	POWER	SPL	XMAX
5"			
PRO 5W	8 Ω	150 W	91.1 dB
10"			
KAPPA PRO 10LF	8 Ω	1200 W	92 dB
DELTA 10A AND B	8 or 16 Ω	700 W	99 dB
DELTALITE II 2510	8 or 4 Ω	500 W	97 dB
BETA 10A	8 Ω	500 W	97 dB
12"			
DEFINIMAX 4012HO	8 Ω	1200 W	94 dB
DELTA 12LFA AND C	8 or 16 Ω	1000 W	95 dB
KAPPALITE 3012LF	8 or 4 Ω	900 W	96 dB
KAPPALITE 3012HO	8 Ω	800 W	101 dB
DELTALITE II 2512	8 Ω	500 W	100 dB
BETA 12A-2	8 Ω	500 W	98 dB
15"			
DEFINIMAX 4015LF	8 Ω	1400 W	96 dB
KAPPA PRO 15LF-2	8 or 4 Ω	1200 W	98 dB
KAPPA 15LFA	8 Ω	1200 W	99 dB
KAPPA PRO 15A	8 Ω	1000 W	101 dB
DELTA 15LFA	8 or 4 Ω	1000 W	96 dB
KAPPALITE 3015	8 Ω	900 W	101 dB
KAPPALITE 3015LF	8 Ω	900 W	98 dB
DELTALITE II 2515	8 Ω	600 W	99 dB
BETA 15A	8 Ω	600 W	98 dB
18"			
KAPPA PRO 18LF	8 Ω	1600 W	98 dB
IMPERO 18A AND C	8 or 4 Ω	2400 W	96 dB

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

BASS GUITAR

LEGEND CA 10

Made famous as an OEM model in many popular bass guitar cabinet brands, this highly sought after design features a truncated cast frame chassis for tight fitting in your 2x, 4x and 8x10 cabinet. Loud and clear bass guitar tone with legendary growl.

- 400 W Program Power
- 10" Nominal Diameter
- 8 or 16 Ω

ENCLOSURE

- Sealed Box
- Vented Box

SPECIFICATION

Nominal Basket Diameter	10", 254 mm
Nominal Impedance*	8 or 16 Ω
Power Rating*	
Program Power	400 W
Nominal Power	200 W
Resonance	55 Hz
Usable Frequency Range	54 Hz – 3 kHz
Sensitivity*	94.4 dB
Magnet Weight	38 oz.
Gap Height	0.31", 7.9 mm
Voice Coil Diameter	2", 51 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Kapton former
- Ferrite magnet
- Vented and extended core
- Die-cast aluminum basket
- Paper cone
- Cloth cone edge
- Treated paper dust cap



THIELE & SMALL PARAMETERS


Fs	55 Hz
Re	3.7 Ω
Le	0.49 mH
Qms	7.67
Qes	0.41

Qts	0.39
Vas	1.62 cu.ft., 45.94 liters
Vd	105.7 cc
Cms	0.27 mm/N
BL	9.72 T-M
Mms	30 grams
EBP	135
Xmax	3.02 mm
Sd	350.1 cm2
Xlim	7 mm

MOUNTING INFORMATION

Recommended Enclosure Volume	N/A
Sealed	
Vented	12.74–55.22 liters, 0.45–1.95 cu.ft.
Driver Volume Displaced	0.043 cu.ft., 1.22 liters
Major Diameter	10.5", 266.7 mm
Flat to Flat Diameter	10.14", 257.6 mm
Baffle Hole Diameter	9.01", 228.9 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.3", 7.6 mm
Mounting Holes B.C.D.	9.71", 246.5 mm
Depth	4.44", 112.8 mm
Net Weight	8.8 lbs , 3.99 kg
Shipping Weight	9.7 lbs , 4.4 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

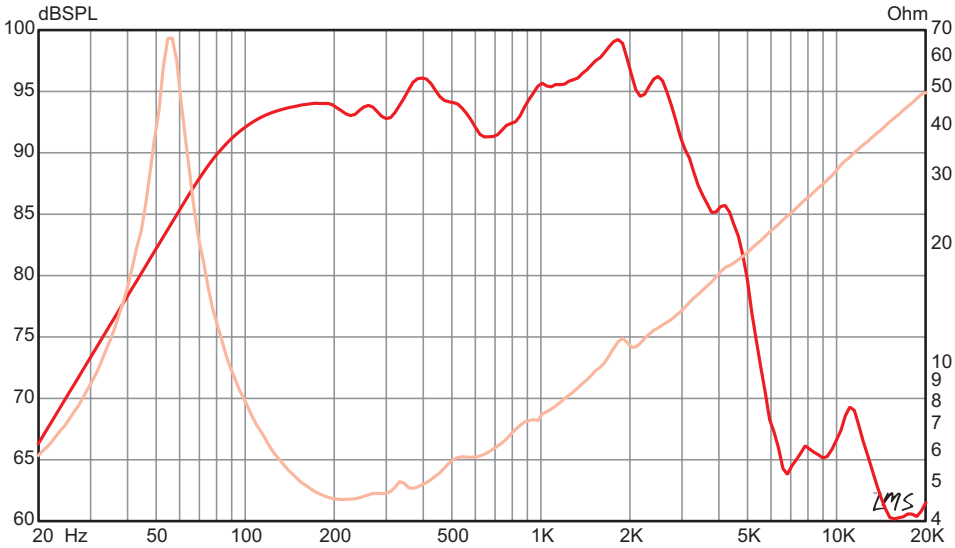

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

BASS GUITAR

LEGEND CA 1059

A larger magnet version of the popular Legend CA10, the Legend CA1059 is a 10" cast-frame bass guitar speaker with a proven track record as THE speaker for punch and clarity in many famous OEM cabinets throughout the decades. Like the CA10, the CA1059's chassis is truncated on the sides for tight fitting in 2x, 4x, and 8x10 configurations. Along with higher Xmax, the CA1059 also features a larger 59 oz. ferrite magnet, producing higher efficiency, and lower Qts for dampening than its smaller magnet version.

- 500 W Program Power
- 10" Nominal Diameter
- 8 or 16 Ω

ENCLOSURE

- Sealed Box
- Vented Box

SPECIFICATION

Nominal Basket Diameter	10", 254 mm
Nominal Impedance*	8 or 16 Ω
Power Rating*	
Program Power	500 W
Nominal Power	250 W
Resonance	48 Hz
Usable Frequency Range	50 Hz – 3.2 kHz
Sensitivity*	98.7 dB
Magnet Weight	59 oz.
Gap Height	0.31", 7.9 mm
Voice Coil Diameter	2", 51 mm

MATERIALS OF CONSTRUCTION

- Edge wound aluminum voice coil
- Polyimide former
- Ferrite magnet
- Die-cast aluminum basket
- Paper cone
- Cloth cone edge
- Treated paper dust cap



THIELE & SMALL PARAMETERS


Fs	48 Hz
Re	5.53 Ω
Le	0.11 mH
Qms	3.27
Qes	0.28

Qts	0.26
Vas	2.52 cu.ft., 71.47 liters
Vd	165.3 cc
Cms	0.42 mm/N
BL	12.54 T-M
Mms	27 grams
EBP	169
Xmax	4.72 mm
Sd	350.1 cm2
Xlim	8 mm

MOUNTING INFORMATION

Recommended Enclosure Volume	N/A
Sealed	
Vented	18.82–70.79 liters, 0.70–2.5 cu.ft.
Driver Volume Displaced	0.061 cu.ft., 1.72 liters
Major Diameter	10.5", 266.7 mm
Flat to Flat Diameter	10.14", 257.6 mm
Baffle Hole Diameter	9.01", 228.9 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.3", 7.6 mm
Mounting Holes B.C.D.	9.71", 246.5 mm
Depth	4.53", 115.1 mm
Net Weight	11.2 lbs , 5.08 kg
Shipping Weight	12.7 lbs , 5.76 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

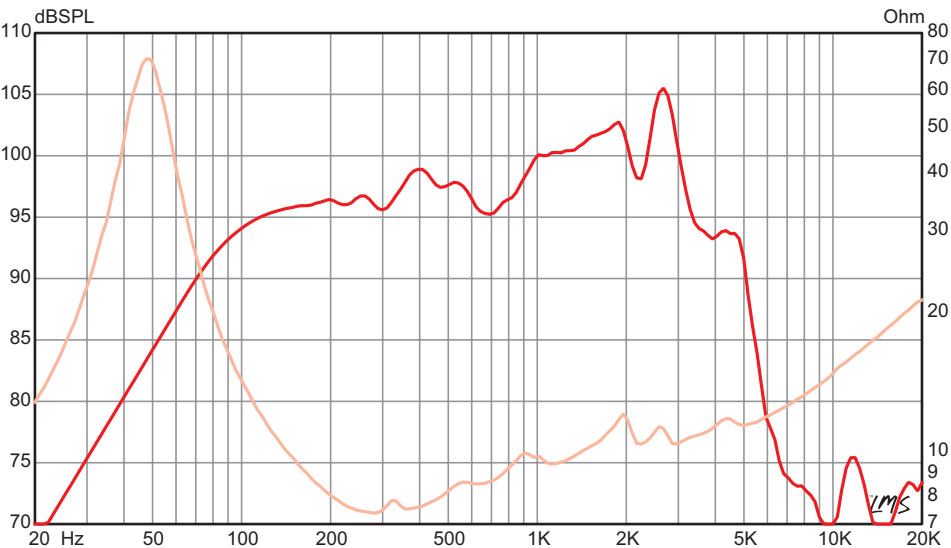

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

BASS GUITAR

LEGEND B102

Recommended for professional bass guitar applications in a vented enclosure. The secondary whizzer cone extends the high-end frequency range. Great if you want a full range tone without adding a tweeter. Also suitable as a professional audio or home hi-fi midrange.

- 400 W Program Power
- 10" Nominal Diameter
- 8 Ω

PRO AUDIO USAGE		ENCLOSURE	
Midrange	<input checked="" type="checkbox"/>	Sealed Box	<input type="checkbox"/>
Midbass	<input type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input type="checkbox"/>		
Subwoofer	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	10", 254 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	400 W
Nominal Power	200 W
Resonance	48 Hz
Usable Frequency Range	44 Hz – 4 kHz
Sensitivity*	92.4 dB
Magnet Weight	45 oz.
Gap Height	0.31", 7.9 mm
Voice Coil Diameter	2", 51 mm

MATERIALS OF CONSTRUCTION

Copper voice coil
Polyimide former
Ferrite magnet
Vented and extended core
Die-cast aluminum basket
Paper cone
Cloth cone edge
Solid composition paper dust cap




THIELE & SMALL PARAMETERS

Fs	48 Hz
Re	6.89 Ω
Le	0.67 mH
Qms	5.31
Qes	0.42

MOUNTING INFORMATION

Recommended Enclosure Volume	N/A
Sealed	
Vented	18–85 liters, 0.63–3 cu.ft.
Driver Volume Displaced	0.047 cu.ft., 1.33 liters
Overall Diameter	10.25", 260.4 mm
Baffle Hole Diameter	9.13", 231.9 mm
Vd	103.5 cc
Cms	0.4 mm/N
BL	11.8 T-M
Mms	28 grams
EBP	113
Xmax	3 mm
Sd	344.9 cm2
Xlim	8 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.28", 7.1 mm
Mounting Holes B.C.D.	9.75", 247.7 mm
Depth	4.33", 110 mm
Net Weight	9.7 lbs , 4.4 kg
Shipping Weight	10.9 lbs , 4.94 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

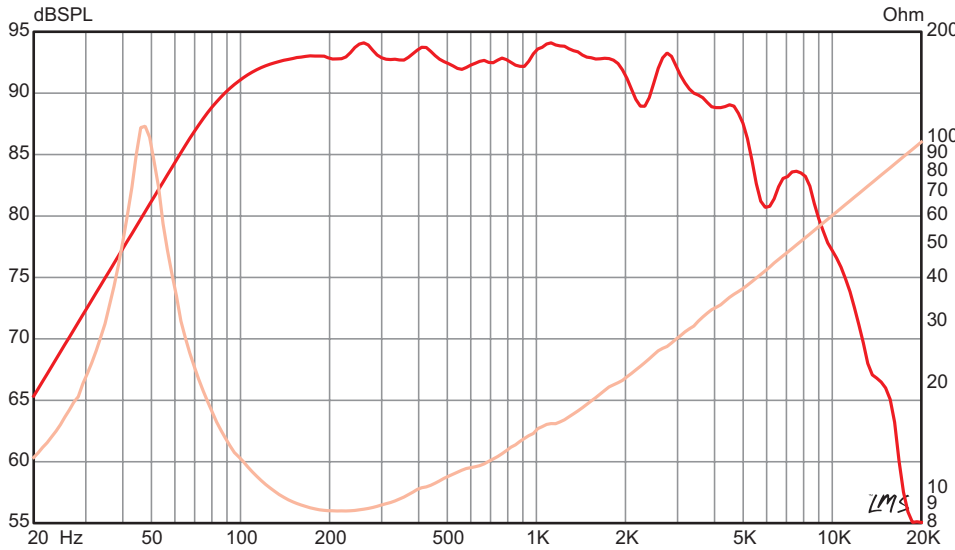

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

BASS GUITAR

LEGEND BP102

A popular bass guitar speaker with a proven track record. Revered for its low-end punch. Works well in a sealed or vented enclosure and in single or multi-driver designs.

- 400 W Program Power
- 10" Nominal Diameter
- 8 or 4 Ω

PRO AUDIO USAGE		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>		
Subwoofer	<input checked="" type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	10", 254 mm
Nominal Impedance*	8 or 4 Ω
Power Rating*	
Program Power	400 W
Nominal Power	200 W
Resonance	35 Hz
Usable Frequency Range	40 Hz – 2 kHz
Sensitivity*	91.8 dB
Magnet Weight	38 oz.
Gap Height	0.31", 7.9 mm
Voice Coil Diameter	2", 51 mm

MATERIALS OF CONSTRUCTION

Copper voice coil
Polyimide former
Ferrite magnet
Non-vented core
Pressed steel basket
Paper cone
Cloth cone edge
Zurette dust cap




THIELE & SMALL PARAMETERS

Fs	35 Hz
Re	5.59 Ω
Le	0.83 mH
Qms	5.36
Qes	0.47

MOUNTING INFORMATION

Recommended Enclosure Volume	
Sealed	14–28 liters, 0.5–1 cu.ft.
Vented	25.5–62 liters, 0.9–2.2 cu.ft.
Driver Volume Displaced	0.041 cu.ft., 1.17 liters
Overall Diameter	10.08", 256 mm
Baffle Hole Diameter	9.18", 233.2 mm
Vd	207.4 cc
Cms	0.54 mm/N
BL	10 T-M
Mms	38 grams
EBP	75
Xmax	6.2 mm
Sd	334.5 cm2
Xlim	10 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.25", 6.4 mm
Mounting Holes B.C.D.	9.66", 245.4 mm
Depth	4.25", 108 mm
Net Weight	8.9 lbs , 4.04 kg
Shipping Weight	9.1 lbs , 4.13 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

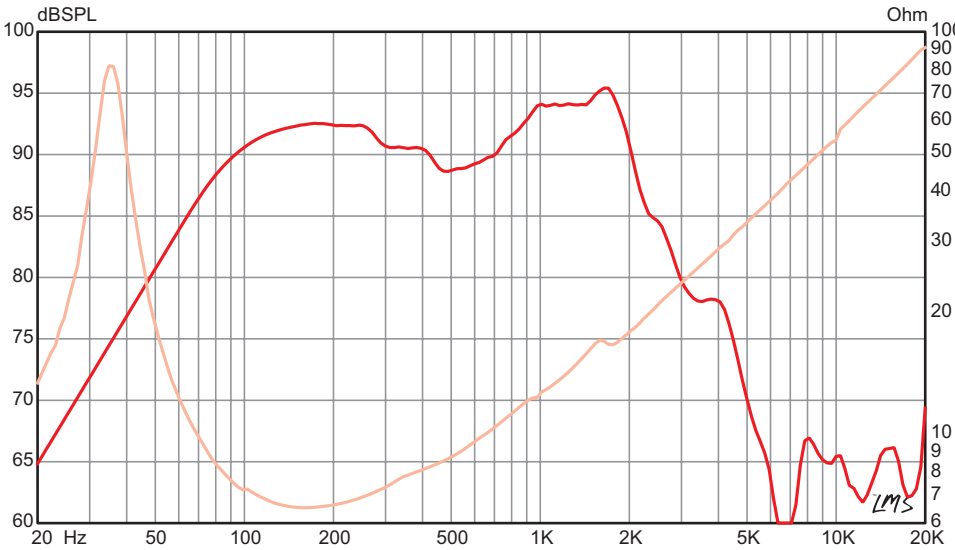

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

BASS GUITAR

BASSLITE® SC10

Optimized specifically for sealed bass cabinets, the ultra-lightweight Basslite SC10 will take the weight out, but leave the performance in. Featuring a 4 oz. neodymium magnet and 2 inch voice coil, this 10 inch speaker is available in 16 and 32 ohms for your 4x10 or 8x10 rig.

- 300 W Program Power
- 10” Nominal Diameter
- 16 or 32 Ω

ENCLOSURE	
Sealed Box	<input checked="" type="checkbox"/>
Vented Box	<input checked="" type="checkbox"/>

SPECIFICATION

Nominal Basket Diameter	10", 254 mm
Nominal Impedance*	16 or 32 Ω
Power Rating*	
Program Power	300 W
Nominal Power	150 W
Resonance	46 Hz
Usable Frequency Range	50 Hz – 4.2 kHz
Sensitivity*	94.3 dB
Magnet Weight	4 oz.
Gap Height	0.28", 7.1 mm
Voice Coil Diameter	2", 51 mm

MATERIALS OF CONSTRUCTION

Copper voice coil
Polyimide former
Neodymium magnet
Non-vented core
Pressed steel basket
Curved paper cone
Cloth cone edge
Solid composition felt dust cap




THIELE & SMALL PARAMETERS

Fs	46 Hz
Re	12.21 Ω
Le	0.89 mH
Qms	2.23
Qes	0.56
Qts	0.45
Vas	2.76 cu.ft., 78.27liters
Vd	154 cc
Cms	0.46 mm/N
BL	12.79 T-M
Mms	26 grams
EBP	81
Xmax	4.4 mm
Sd	350.1 cm2
Xlim	9 mm

MOUNTING INFORMATION

Recommended Enclosure Volume	
Sealed	16.79–40.49 liters, 0.59–1.43 cu.ft.
Vented	27.47–69.38 liters, 0.94–2.45 cu.ft.
Driver Volume Displaced	0.03 cu.ft., 0.84 liters
Overall Diameter	10.08", 256 mm
Baffle Hole Diameter	9.18", 233.2 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.25", 6.4 mm
Mounting Holes B.C.D.	9.66", 245.4 mm
Depth	4.25", 108 mm
Net Weight	3.5 lbs , 1.59 kg
Shipping Weight	4.6 lbs , 2.09 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

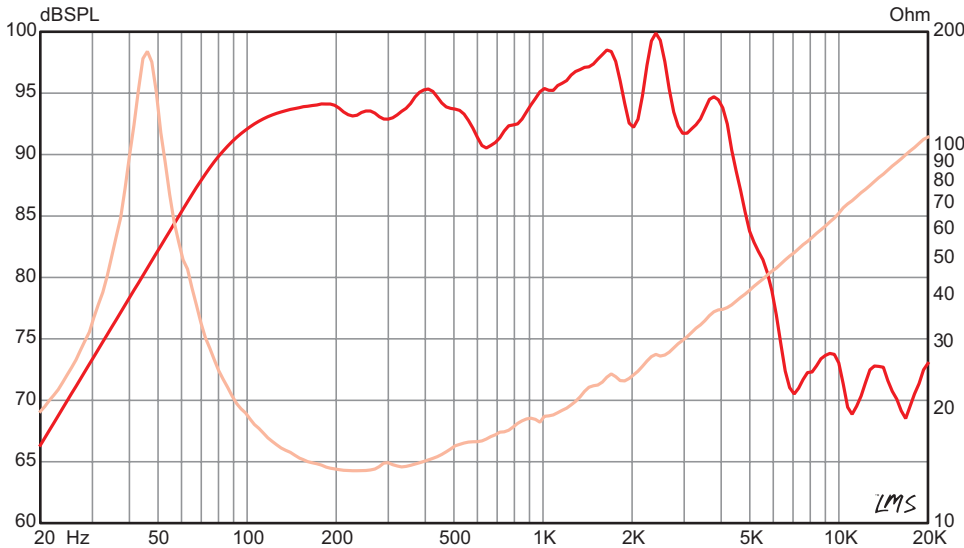

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

BASS GUITAR

BASSLITE® S2010

An efficient, ultra-lightweight 10” neodymium speaker recommended for bass guitar applications. Ideal in vented 1X, 2X, and 4 X10 enclosures.

- 300 W Program Power
- 10” Nominal Diameter
- 8 Ω

PRO AUDIO USAGE		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>		
Subwoofer	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	10", 254 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	300 W
Nominal Power	150 W
Resonance	46 Hz
Usable Frequency Range	54 Hz – 3 kHz
Sensitivity*	96.2 dB
Magnet Weight	4 oz.
Gap Height	0.28", 7.1 mm
Voice Coil Diameter	2", 51 mm

MATERIALS OF CONSTRUCTION

Copper voice coil
Polyimide former
Neodymium magnet
Non-vented core
Pressed steel basket
Paper cone
Cloth cone edge
Solid composition felt dust cap




THIELE & SMALL PARAMETERS

Fs	46 Hz
Re	5.02 Ω
Le	0.47 mH
Qms	4.16
Qes	0.34
Qts	0.31
Vas	2.24 cu.ft., 63.4liters
Vd	140 cc
Cms	0.36 mm/N
BL	11.9 T-M
Mms	33 grams
EBP	135
Xmax	4 mm
Sd	350.1 cm2
Xlim	8 mm

MOUNTING INFORMATION

Recommended Enclosure Volume	
Sealed	N/A
Vented	20–51 liters, 0.7–1.8 cu.ft.
Driver Volume Displaced	0.03 cu.ft., 0.84 liters
Overall Diameter	10.08", 256 mm
Baffle Hole Diameter	9.18", 233.2 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	N/A
Mounting Holes Diameter	0.25", 6.4 mm
Mounting Holes B.C.D.	9.66", 245.4 mm
Depth	4.25", 108 mm
Net Weight	3.5 lbs , 1.59 kg
Shipping Weight	4.6 lbs , 2.09 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

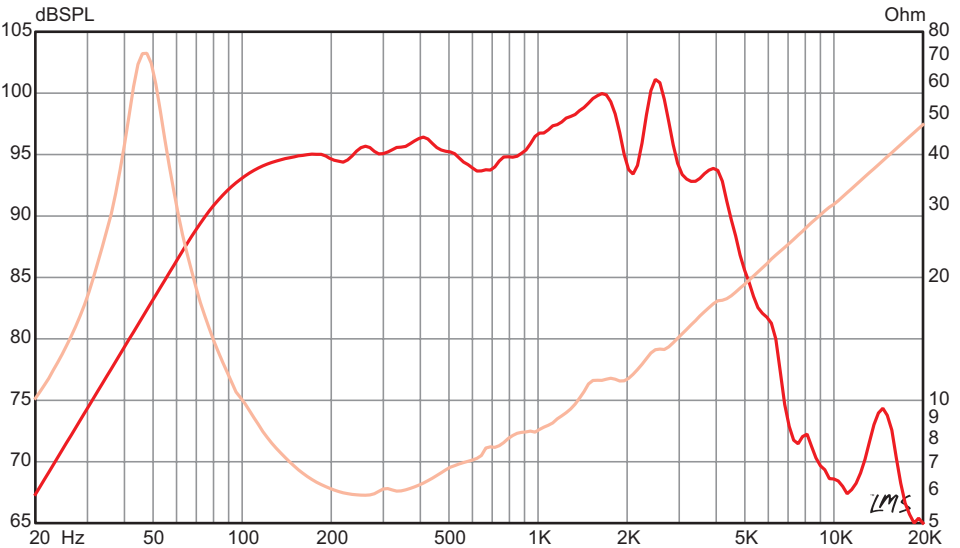

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

BASS GUITAR

LEGEND B810

A 32 ohm, 10 inch bass guitar speaker offering classic sound with modern features. A perfect replacement for your 8x10 cabinet.

- 300 W Program Power
- 10” Nominal Diameter
- 32 Ω

ENCLOSURE	
Sealed Box	<input checked="" type="checkbox"/>
Vented Box	<input checked="" type="checkbox"/>

SPECIFICATION

Nominal Basket Diameter	10”, 254 mm
Nominal Impedance*	32 Ω
Power Rating*	
Program Power	300 W
Nominal Power	150 W
Resonance	52 Hz
Usable Frequency Range	49 Hz – 5.1 kHz
Sensitivity*	92.7 dB
Magnet Weight	30 oz.
Gap Height	0.31”, 7.9 mm
Voice Coil Diameter	2”, 51 mm

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Kapton former
- Ferrite magnet
- Bumped
- Pressed steel basket
- Paper cone
- Cloth cone edge
- Zurette dust cap




THIELE & SMALL PARAMETERS

Fs	52 Hz
Re	27.5 Ω
Le	2.72 mH
Qms	13.91
Qes	0.68

MOUNTING INFORMATION

Recommended Enclosure Volume	14–35 liters,
Sealed	0.5–1.3 cu.ft.
Vented	45.76–76 liters,
	1.6–2.7 cu.ft.
Qts	0.65
Vas	2.34 cu.ft., 66.4liters
Vd	165.2 cc
Cms	0.39 mm/N
BL	17.7 T-M
Mms	24 grams
EBP	77
Xmax	4.7 mm
Sd	350.1 cm2
Xlim	9.5 mm
Driver Volume Displaced	0.039 cu.ft., 1.1 liters
Overall Diameter	10.11”, 256.8 mm
Baffle Hole Diameter	9.13”, 231.9 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.23”, 5.8 mm
Mounting Holes B.C.D.	9.6”, 243.8 mm
Depth	4.08”, 103.6 mm
Net Weight	6.7 lbs , 3.04 kg
Shipping Weight	7.9 lbs , 3.58 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

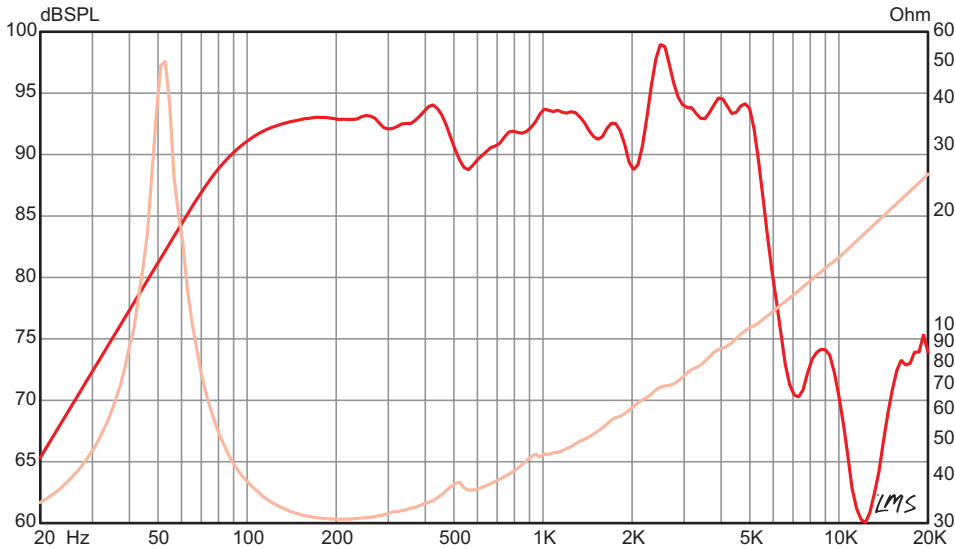

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

BASS GUITAR

LEGEND BP122

A 12” bass guitar driver that delivers warm, rich tone and deep bass. A big brother to the popular 10” Legend BP102, this 250 watt driver is at home in small sealed enclosures, and also works well in pro audio and home hi-fi applications.

- 500 W Program Power
- 12” Nominal Diameter
- 8 Ω

PRO AUDIO USAGE		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>		
Subwoofer	<input checked="" type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	12”, 305 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	500 W
Nominal Power	250 W
Resonance	35 Hz
Usable Frequency Range	35 Hz – 2.3 kHz
Sensitivity*	94.1 dB
Magnet Weight	38 oz.
Gap Height	0.31”, 7.9 mm
Voice Coil Diameter	2”, 51 mm

MATERIALS OF CONSTRUCTION

- Copper voice Coil
- Polyimide former
- Ferrite magnet
- Non-vented core
- Pressed Steel basket
- Paper cone
- Cloth cone edge
- Solid composition felt dust cap



* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.




THIELE & SMALL PARAMETERS

Fs	35 Hz
Re	5.66 Ω
Le	0.84 mH
Qms	9.26
Qes	0.57

MOUNTING INFORMATION

Recommended Enclosure Volume	22.65–106.19 liters,
Sealed	0.8–3.75 cu.ft.
Vented	56.63–169.9 liters,
	2–6 cu.ft.
Qts	0.54
Vas	5.56 cu.ft., 157.4liters
Vd	330.1 cc
Cms	0.4 mm/N
BL	10.55 T-M
Mms	50 grams
EBP	62
Xmax	6.2 mm
Sd	532.4 cm2
Xlim	12.4 mm
Driver Volume Displaced	0.071 cu.ft., 2 liters
Overall Diameter	12.26”, 311.4 mm
Baffle Hole Diameter	11.08”, 281.4 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.25”, 6.4 mm
Mounting Holes B.C.D.	11.71”, 297.4 mm
Depth	5.33”, 135.3 mm
Net Weight	9 lbs , 4.08 kg
Shipping Weight	11 lbs , 4.99 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

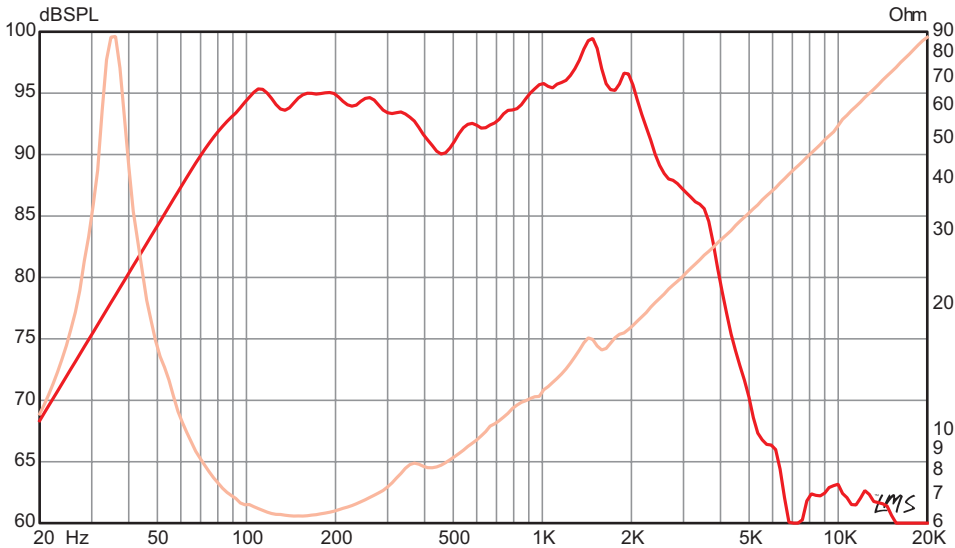

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

BASS GUITAR

BASSLITE® S2012

A highly efficient, ultra-lightweight 12” neodymium bass guitar speaker that strikes a balance between efficiency and low-end punch. Ideal in vented 1X, 2X, and 4 X12 enclosures.

- 300 W Program Power
- 12” Nominal Diameter
- 8 Ω

PRO AUDIO USAGE		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>		
Subwoofer	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	12”, 305 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	300 W
Nominal Power	150 W
Resonance	48 Hz
Usable Frequency Range	49 Hz – 4.5 kHz
Sensitivity*	99 dB
Magnet Weight	4 oz.
Gap Height	0.28”, 7.1 mm
Voice Coil Diameter	2”, 51 mm

MATERIALS OF CONSTRUCTION

Copper voice coil
Polyimide former
Neodymium magnet
Non-vented core
Pressed steel basket
Paper cone
Cloth cone edge
Solid composition felt dust cap




THIELE & SMALL PARAMETERS

Fs	48 Hz
Re	5.1 Ω
Le	0.43 mH
Qms	5.5
Qes	0.53

MOUNTING INFORMATION

Recommended Enclosure Volume	31–35 liters,
Sealed	1.1–1.3 cu.ft.
Vented	42.5–85 liters,
	1.5–3 cu.ft.
Driver Volume Displaced	0.059 cu.ft., 1.67 liters
Overall Diameter	12.03”, 305.6 mm
Baffle Hole Diameter	11.07”, 281.2 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	N/A
Mounting Holes Diameter	0.25”, 6.4 mm
Mounting Holes B.C.D.	11.59”, 294.4 mm
Depth	5.1”, 129.5 mm
Net Weight	4.1 lbs, 1.86 kg
Shipping Weight	5.8 lbs, 2.63 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

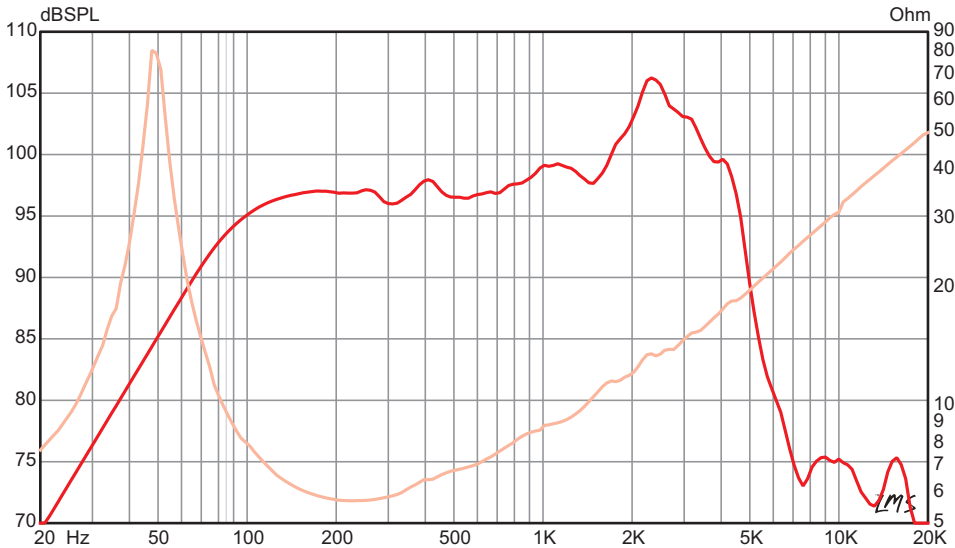

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

BASS GUITAR

LEGEND BP1525

A 15” bass guitar driver that delivers warm, rich tone and deep bass. A big brother to the popular 10” Legend BP102, this 700 watt driver is at home in small sealed enclosures, and also works well in pro audio and home hi-fi applications.

- 700 W Program Power
- 15” Nominal Diameter
- 8 Ω

PRO AUDIO USAGE		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>		
Subwoofer	<input checked="" type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	15”, 381 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	700 W
Nominal Power	350 W
Resonance	32 Hz
Usable Frequency Range	35 Hz – 2.1 kHz
Sensitivity*	96.6 dB
Magnet Weight	56 oz.
Gap Height	0.31”, 7.9 mm
Voice Coil Diameter	2.5”, 64 mm

MATERIALS OF CONSTRUCTION

Copper voice coil
Polyimide former
Ferrite magnet
Vented and extended core
Pressed Steel basket
Paper cone
Cloth cone edge
Solid composition felt dust cap




THIELE & SMALL PARAMETERS

Fs	32 Hz
Re	6.65 Ω
Le	1.12 mH
Qms	11.21
Qes	0.5

MOUNTING INFORMATION

Recommended Enclosure Volume	42.48–158.58 liters,
Sealed	1.5–5.6 cu.ft.
Vented	90.61–198.22 liters,
	3.2–7 cu.ft.
Driver Volume Displaced	0.128 cu.ft., 3.62 liters
Overall Diameter	15.15”, 384.8 mm
Baffle Hole Diameter	13.9”, 353.1 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.25”, 6.4 mm
Mounting Holes B.C.D.	14.56”, 369.8 mm
Depth	6.61”, 168 mm
Net Weight	12 lbs, 5.44 kg
Shipping Weight	14 lbs, 6.35 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

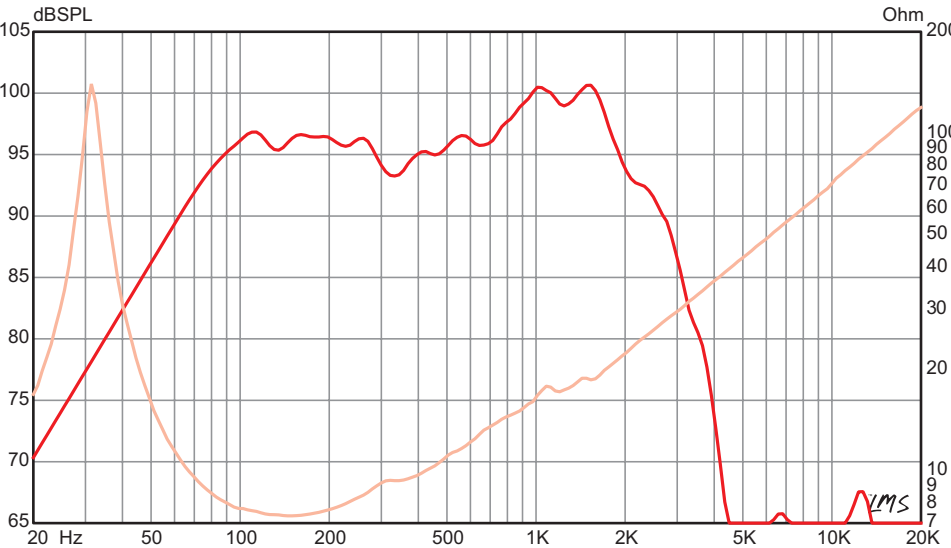

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

BASS GUITAR

LEGEND CA154

High SPL 4 ohm, 15" woofer recommended for use in bass guitar cabinets or in a PA cabinet.

- 600 W Program Power
- 15" Nominal Diameter
- 4 Ω

PRO AUDIO USAGE		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Midbass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>		
Subwoofer	<input type="checkbox"/>		

SPECIFICATION

Nominal Basket Diameter	15", 381 mm
Nominal Impedance*	4 Ω
Power Rating*	
Program Power	600 W
Nominal Power	300 W
Resonance	51 Hz
Usable Frequency Range	45 Hz – 3 kHz
Sensitivity*	96.9 dB
Magnet Weight	56 oz.
Gap Height	0.38", 9.7 mm
Voice Coil Diameter	2.5", 64 mm

MATERIALS OF CONSTRUCTION

Copper voice coil
Polyimide former
Ferrite magnet
Vented core
Pressed Steel basket
Treated paper cone
Sealed cloth surround
Treated paper dust cap




THIELE & SMALL PARAMETERS

Fs	51 Hz
Re	2.92 Ω
Le	0.8 mH
Qms	4.94
Qes	0.54

MOUNTING INFORMATION

Recommended Enclosure Volume	40–71 liters,
Sealed	1.4–2.5 cu.ft.
Vented	45–170 liters,
	1.6–6 cu.ft.
Driver Volume Displaced	0.128 cu.ft., 3.62 liters
Overall Diameter	15.15", 384.8 mm
Baffle Hole Diameter	13.87", 352.3 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	N/A
Mounting Holes Diameter	0.25", 6.4 mm
Mounting Holes B.C.D.	14.56", 369.8 mm
Depth	6.25", 158.8 mm
Net Weight	11.9 lbs , 5.4 kg
Shipping Weight	14.1 lbs , 6.4 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

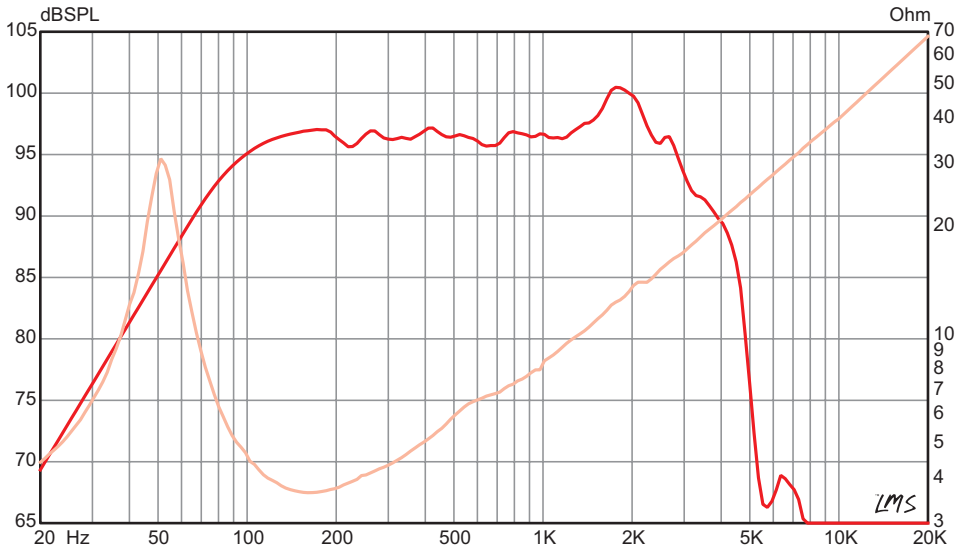

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

BASS GUITAR

LEGEND CB158

A proven 15" bass guitar speaker with vintage qualities that packs a lot of sonic punch. Recommended for sealed or vented enclosures.

- 600 W Program Power
- 15" Nominal Diameter
- 8 Ω

ENCLOSURE	
Sealed Box	<input checked="" type="checkbox"/>
Vented Box	<input checked="" type="checkbox"/>

SPECIFICATION

Nominal Basket Diameter	15", 381 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	600 W
Nominal Power	300 W
Resonance	34 Hz
Usable Frequency Range	47 Hz – 3 kHz
Sensitivity*	98.2 dB
Magnet Weight	80 oz.
Gap Height	0.37", 9.5 mm
Voice Coil Diameter	2.5", 64 mm

MATERIALS OF CONSTRUCTION

Copper voice coil
Polyimide former
Ferrite magnet
Vented and extended core
Die-cast aluminum basket
Paper cone
Cloth cone edge
Solid composition paper dust cap




THIELE & SMALL PARAMETERS

Fs	34 Hz
Re	6.15 Ω
Le	0.33 mH
Qms	5.9
Qes	0.36

MOUNTING INFORMATION

Recommended Enclosure Volume	54–65 liters,
Sealed	1.9–2.3 cu.ft.
Vented	54–159 liters,
	1.9–5.6 cu.ft.
Driver Volume Displaced	0.138 cu.ft., 3.92 liters
Overall Diameter	15.22", 386.6 mm
Baffle Hole Diameter	13.99", 355.4 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.28", 7.1 mm
Mounting Holes B.C.D.	14.56", 369.8 mm
Depth	6.5", 165.1 mm
Net Weight	17.3 lbs , 7.85 kg
Shipping Weight	19.4 lbs , 8.8 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

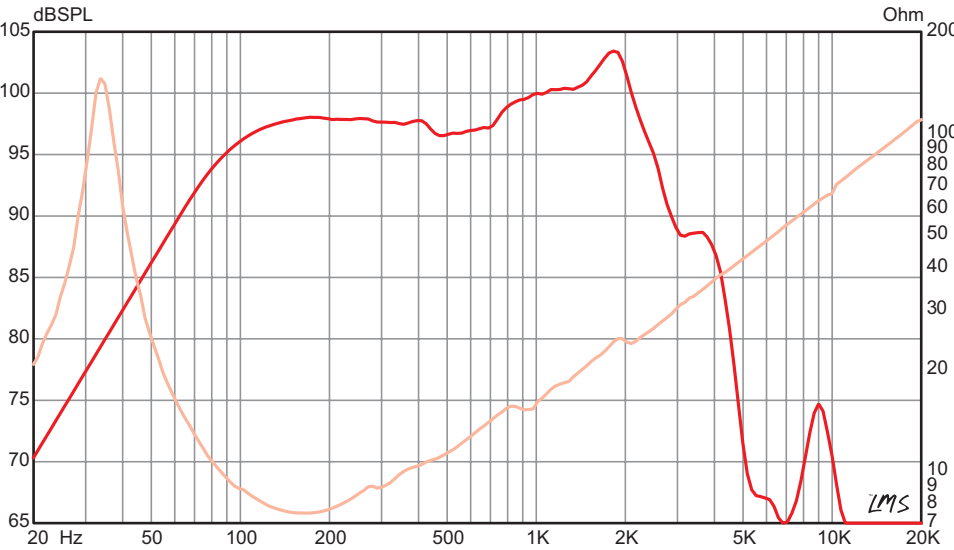

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

UNDERSTANDING LOUDSPEAKER DATA

The ability to choose the most appropriate loudspeaker for a particular enclosure is directly related to your understanding of the performance data that manufacturers provide with their products. Prior to 1970, there were no easy or affordable methods accepted as standard in the industry for obtaining this data. The recognized methods were expensive and often unrealistic for the thousands of individuals needing loudspeaker performance information.

THIELE-SMALL PARAMETERS

In the early seventies, several technical papers were presented to the AES (Audio Engineering Society) that resulted in the development of what we know today as “Thiele-Small Parameters”. These papers were authored by A.N. Thiele, and Richard H. Small.

The Thiele and Small papers concentrated on showing how the following parameters define the relationship between a speaker and a particular enclosure. Eminence recommends that you develop a basic understanding for the meaning of each parameter so that you can make informed decisions when choosing your loudspeakers.

FS This parameter is the free-air resonant frequency of a speaker. Simply stated, it is the point at which the weight of the moving parts of the speaker becomes balanced with the force of the speaker suspension when in motion. It is important to know this information so that you can prevent your enclosure from ringing like a bell when it reaches its resonant frequency. As a general rule of thumb, a lower Fs indicates a woofer that would be better for low-frequency reproduction than a woofer with a higher Fs. However, other parameters affect the ultimate performance of a woofer as well and may make a speaker with a higher Fs a better candidate for your application.

RE This parameter is very simply the DC resistance of the driver in question. In other words, this measurement is made with an ohm meter and is often referred to as the “DCR”. This measurement will almost always be less than the impedance listed by the manufacturer. Many consumers get concerned when they see that the Re is less than the published impedance and fear that their amplifier is getting a load that is too heavy. Due to the fact that the inductance of a speaker rises with a rise in frequency, it is not likely that the amplifier will often see the DC resistance as its load.

LE This parameter is the voice coil inductance of the speaker measured in millihenries (mH). The industry standard is to measure inductance at 1,000 Hz. This is a difficult parameter to explain, but basically as frequencies get higher there will be a rise in impedance above the DC resistance rating. This can be attributed to the fact that the voice coil is acting as an inductor. Consequently, the impedance of a speaker is not a fixed resistance, but can be represented as a curve that changes as the input frequency changes. Maximum impedance or Zmax occurs at Fs.

Q PARAMETERS Qts, Qes, and Qtc are all measurements related to the control of a speaker’s suspension when it reaches the resonant frequency.

QMS is a measurement of the control coming from the speaker’s mechanical suspension system; the surround and spider.

QES is a measurement of the control coming from the speaker’s electrical suspension system; the voice coil and magnet.

QTS is called the “Total Q” of the driver and is derived from an equation where Qes is multiplied by Qms and the result is divided by the sum of the same. The result is Qts. As a general guideline, woofers fall into three categories relative to their Qts:

1. Qts of .4 or below indicates a woofer well suited for a vented enclosure.
2. Qts between .4 and .7 indicates a woofer well suited for a sealed enclosure.
3. Qts of .7 or above indicates a woofer well suited for free-air or infinite baffle applications.

These suggestions are simply rules of thumb and do not always apply. For instance, the Eminence Kilomax 18 has a Qts of .56 that would indicate a sealed enclosure, but we know that the Kilomax is one of the most highly regarded woofers in the Professional Audio industry for a ported enclosure.



VAS/CMS Vas (Not to be confused with the recommended enclosure size) represents the equivalent stiffness in an air volume to the force of the compliance (Cms) of the suspension in a particular speaker. It is one of the trickiest parameters to measure. Air changes relative to humidity and temperature. Cms is measured in meters per Newton. It is the force exerted by the mechanical suspension of the speaker. It is simply a measurement of its stiffness.

VD This parameter is the Peak Diaphragm Displacement Volume. It is the Xmax (Voice Coil Overhang) of the driver multiplied by the Sd (Surface area of the cone). Simply stated it is a measurement of how much air the cone will move at full excursion and is usually noted in cc.

BL Expressed in Tesla meters is a measurement of the motor strength of a speaker. This is created by the product of the magnetic field strength times the length of wire in the field. If you were to take a given mass, that when placed on the cone of a speaker would move the cone downward from its home position, then measure the current in amperes required to move the cone back to home position, you can calculate BL. The formula is Ma in grams divided the current in amperes.

MMS This parameter is the combination of the weight of the cone assembly plus the driver radiation mass load. Confusing...but the weight of the cone assembly is easy. Most manufacturers know that weight when the speaker is designed. It is the sum of the weight of the cone assembly components. The driver radiation mass load is the confusing part. In simple terminology, it is the weight of the air that the cone will have to push. Air certainly has mass and needs to be recognized in these calculations.

RMS This parameter represents the mechanical resistance of a driver’s suspension losses. It is a measurement of the absorption qualities of the speaker suspension and is stated in N*sec/m.

EBP This measurement represents Fs / Qe. It is used in many enclosure design formulas to determine if a speaker is more suitable for a closed or vented design. An EBP close to 100 usually indicates a speaker that is best suited for a vented enclosure. On the contrary, an EBP closer to 50 usually indicates a speaker best suited for a closed box design.

XMAX Short for Maximum Linear Excursion. Speaker output becomes non-linear when the voice coil begins to leave the magnetic gap. Although suspensions can create non-linearity in output, the point at which the number of turns in the gap (see BL) begins to decrease is when distortion starts to increase. Some manufacturers have often used the maximum excursion of the speaker which when exceeded would result in mechanical damage. This parameter is recognized as Xlim. The bottom line is; be sure you are comparing apples to apples. Most manufacturers will specify the way this measurement is obtained. Distortion is typically very audible before Xlim is reached due to the increase in non-linearity in the motor and suspensions.

SD This parameter is the actual surface area of the cone, normally given in square cm.

ZMAX This parameter represents the speaker’s impedance at resonance and it is usually many times the DCR of the driver.

ADDITIONAL PERFORMANCE DATA

In addition to Thiele-Small Parameters, loudspeaker manufacturers typically publish additional measurements and performance information. Again, it is wise to become familiar with this data and what it actually means to you.

USABLE FREQUENCY RANGE This data is relatively self-explanatory. It is the frequency range for which Eminence feels the device will prove useful. Each manufacturer uses different techniques for determining “Usable Frequency Range”. Most methods are recognized as acceptable in the industry, but can lend different results.

Eminence response curves are measured as follows: All speakers are tested at 1W/1m using a variety of test set-ups for the appropriate impedance. [LMS using 0.25” supplied microphone (software calibrated) mounted 1m from wall/baffle.] [2 ft. X 2 ft. baffle is built into the wall with the speaker mounted flush against a steel ring for minimum diffraction.] [Hafler P1500 Trans-Nova amplifier] [2,700 cu. ft. anechoic chamber with fiberglass on all six surfaces (three with custom-made wedges).]

SPL (Average Sensitivity) This data represents one of the most useful specifications published for any transducer. It is a representation of the output you can expect from a device relative to the input power. This is important because it requires 2 times the power to increase the volume of a speaker 3 dB.

To increase the volume of a 50 watt guitar amplifier 3 dB (an audible, but relatively small amount), it would require a total of 100 watts of power. The same thing could be achieved by replacing the speaker with one that is 3 dB more sensitive (usually a more economical alternative).

Most manufacturers determine sensitivity by putting the speaker in a baffle and measuring the sound pressure level inside an anechoic chamber at a distance of one meter, with 1 watt of input power across the frequency response curve. A loudspeaker measurement software program then would generally calculate the average sound pressure level over the response curve. This is a good method and usually very accurate. The problem is that one manufacturer may place the microphone one meter from the dust cap of the speaker and gain a distinct advantage over the manufacturer who placed the microphone one meter from the baffle board. Again, be sure you understand how this specification was derived.

The Eminence method represents the average output across the usable frequency range when applying 1W/1m into the nominal impedance. i.e: 2.83V/8Ω, 4V/16Ω.

POWER RATING This specification is very important to transducer selection. Obviously, you need to choose a loudspeaker that is capable of handling the input power you are going to provide. By the same token, you can destroy a loudspeaker by using too little power. Generally speaking, the number one contributor to a transducer’s ability to handle power is its ability to release thermal energy. Those loudspeaker characteristics are affected by several design choices, but most notably voice coil size, magnet size, venting, and the adhesives used in voice coil construction.

Larger coil and magnet sizes provide more area for heat to dissipate, while venting allows thermal energy to escape and cooler air to enter the motor structure. Equally important is the ability of the voice coil to handle thermal energy. Eminence is well known for the use of proprietary adhesives and voice coil components that maximize the coil’s ability to handle extreme temperatures.

Mechanical factors must also be considered when determining power handling. A transducer might be able to handle 1,000 watts from a thermal perspective, but would fail long before that level was reached from a mechanical issue such as the coil hitting the back plate, the coil coming out of the gap, the cone buckling from too much outward movement, or the spider bottoming on the top plate. Be sure to consider the suggested usable frequency range and the Xlim parameter in conjunction with the power rating and enclosure design to avoid such failures.

The Eminence power rating is derived using an EIA 426A noise source and test standard. All tests are conducted for 8 hours in a free-air, non-temperature controlled environment. The Eminence Program Power rating is double that of our standard Watts rating.



MISSION STATEMENT

Eminence is dedicated to providing the best Quality, Value and Service to meet our customers’ needs.

CORE VALUES

Mark 10:43 – 45

“...whoever wants to become great among you must be your servant...For even the Son of Man did not come to be served, but to serve, and to give his life as a ransom for many.”

At Eminence, our business principles are rooted in our personal faith and beliefs. We strive to show humility, respect and fairness toward all. We are grateful for our successes and learn from our failures. We are called to use our gifts and talents to serve others. It is through this service that we are truly blessed each and every day.

FOOTNOTES

IMPEDANCE

Please consult www.eminence.com for specifications of models with alternative impedances.

POWER RATING

Multiple units exceed published ratings evaluated under EIA 426A specification while tested in a free-air, non-temperature-controlled environment. Multiple compression drivers exceeded published ratings evaluated under EIA-426A or AES specification while mounted on Eminence’s H290, H290S, or H2EA horn in a non-temperature-controlled environment.

SENSITIVITY

The average output across the usable frequency range when applying 1W/1m into the nominal impedance. i.e: 2.83V/8Ω, 4V/16Ω. Eminence response curves are measured under the following conditions: All speakers are tested at 1W/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2 ft. x 2 ft. baffle is built into the wall with the speaker mounted flush against a steel ring for minimum diffraction | Yamaha P3500S amplifier | 2700 cu. ft. chamber with fiberglass on all six surfaces (three with custom-made wedges). Compression drivers were tested using a 2ft x 2ft baffle built into the wall with horn front mounted.

COAXIALS

BETA 8CX, 10CX, and 12CX are coaxial speakers with tweeter sold separately. Published usable frequency response contingent upon use of ASD:1001 HF Driver.

Prices, product cosmetics and specifications are subject to change without notice.



EMINENCE SPEAKER LLC

DESIGNED AND ASSEMBLED IN THE USA

838 Mulberry Pike, Eminence, KY 40019
Phone (502) 845-5622 | email info@eminence.com

EMINENCE.COM



YouTube