



Mick Thomson Signature

DV-77-16

From the beginning, the focus of this speaker was balance, response, and a very musical tonality. Delivering tight punchy lows, thick harmonically complex mid-range & detailed highs without excess fizz. Not a clone or a copy, this speaker was designed in the studio and proven on stage

12" | 70 W
16 Ω



SPECIFICATION


Nominal Basket Diameter	12.0", 305 mm
Nominal Impedance*	16 Ω
Watts	70 W
Resonance	73 Hz
Usable Frequency Range	70 Hz - 5.3 kHz
Sensitivity***	100.6 dB
Magnet Weight	50 oz.
Gap Height	0.313 ", 8.0 mm
Voice Coil Diameter	1.75 ", 44 mm

MOUNTING INFORMATION

Enclosure Type	Copper voice coil
Closed Back	Nomex former
Open Back	Ferrite
Driver Volume Displaced	0.079 cu.ft., 2.25 liters
Overall Diameter	12.24 ", 310.9 mm
Baffle Hole Diameter	11.09 ", 281.7 mm
Depth	5.19 ", 131.8 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.13 ", 3.4 mm
Mounting Holes B.C.D.	11.69 ", 296.9 mm
Net Weight	10.40 lbs., 4.72 kg
Shipping Weight	12.10 lbs., 5.49 kg

MATERIALS OF CONSTRUCTION

Copper voice coil
Nomex former
Ferrite
Stamped steel basket
Paper cone
Full molded paper
Zurette dust cap

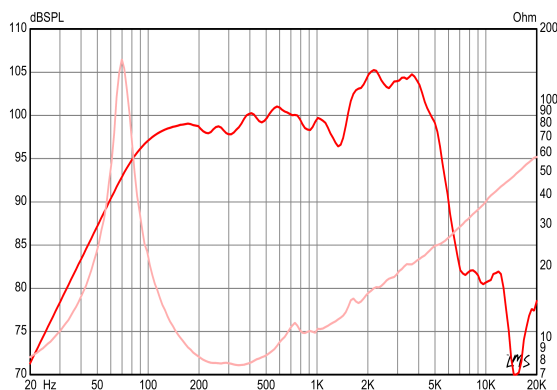

[LEARN MORE AT EMINENCE.COM](https://www.eminence.com)